OPTIONAL PARTS FOR SPLIT & MULTI SPLIT

SPLIT Optional Parts List

уре				Wall M	Mounted						sette		Floor/Ceiling	Ce	iling	Duct				
					La			Com			irge				Compact	Slim		n Static	High Static	
			Inverter	ASAG09/12JLCA		erter	Con	stant	Inverter	Constant	Inverter	Constant AUY25/30ABAR	Inverter	Inverter	Constant ABY30ABA-W	Constant	Inverter	Inverter	Constant ARY25/30ALC	Constant ARY60AUAK
_			ASAA09/12JGC ASMA09/12JET	ASMG09/12JLTA	ASAA18/24/30 JCC	ASAG18/24/30 JFCA	ASAA18/24 FMTA-A	ASYA18/24 AET	AUAG24LVLA AUAG24LVLA AUAG24LRLA-A	AUY18ABAB AUY18RBAB	AUAG30/36/45/54 LRLA AUAG36LRLC-A	AUY25RLD/30RLD-W AUY45/54ABAS AUY45/54RLB3W	ABAG18/24LVTA	ABAG 30/36/45 LRTA	ABY36/45/54ABA3W ABY36/45/54RBA3W ABY36/45/54RBA3W	ARY18FUAL	ARAG12/18LLLB	ARAG24LMTA ARAG30/36/45 LMLA	ARY25/30ALC ARY25/30RLC ARY36ALD3 ARY36RLD3 ARY45ALC3 ARY45RLC3	ARY60RUAK ARY90ELC3 ARY90TLC3
Wired Remote Controller		OUTY-RVNYM																		
	High grade Standard grade	OUTY-RNNYM	OUTY-RNNYM		OUTB-YUD	OUTY-RNNYM	OUTB-YUD	OUTB-YUD	OUTY-RNNYM		OUTY-RNNYM		OUTY-RNNYM	OUTY-RNNYM			OUTY-RNNYM	OUTY-RNNYM		
Simple Remote Controller	語	OUTY-RSNYM	OUTY-RSNYM			OUTY-RSNYM	OUTY-RSNYM		OUTY-RSNYM		OUTY-RSNYM		OUTY-RSNYM	OUTY-RSNYM		OUTB-YPB	OUTY-RSNYM	OUTY-RSNYM	OUTY-RSNYM	OUTY-RSNYM
IR Receiver Kit	For Duct For Cassette										OUTY-LRHYA2	:				OUTY-LRJY1	OUTY-LRHYM	OUTY-LRHYM		OUTY-LRHY1
Remote Sensor Unit																OUTD-RS100 OUTY-XSZX	OUTY-XSZX	OUTY-XSZX		OUTY-XSZX
Auto Louver Grille Kit																	UTD-GXSA-W(For 12) UTD-GXSB-W(For 18)			l
Flange	0													UTD-RF204	OUTD-RF204			UTD-RF204 UTD-SF045T	OUTD-RF204 OUTD-SF045T	
Drain Pump Unit														OUTR-DPB24T	OUTR-DPB24T	OUTZ-PX1BBA		OUTZ-PX1NBA	OUTZ-PX1NBA	
Wide Panel / Additional Grille										UTG-AGDA-W	OUTG-AGYA-W	OUTG-AGEA-W								
Panel Spacer	Panel spacer										OUTG-BGYA-W									
Fresh Air Intake Kit	For Compact For Cassette								OUTZ-VXAA		OUTZ-VXGA									
Air Outlet Shutter Plate	For Compact Cassette For Cassette								OUTR-YDZB		OUTR-YDZC									1
Insulation Kit For High Humidity	For Compact Cassette								OUTZ-KXGC		OUTZ-KXGA									l
Long-life filter																		OUTD-LF25NA	OUTD-LF25NA	UTD-LF60K/ (60 type only
Communication Kit		OUTY-TWBXF																		
External Connect Kit (For Indoor)		OUTY-XWZX5	OUTY-XWZX		OUTY-XWZX	OUTY-XWZX	OUTY-XWZX		OUTY-XWZX		OUTY-XWZX		OUTY-XWZX	OUTY-XWZX						
External Connect Kit (For outdoor)											OTY-XWZXZ2 UTY-XWZXZ3			OUTY-XWZXZ2 UTY-XWZXZ3				OUTY-XWZXZ2 UTY-XWZXZ3		
External Control Set									OUTD-ECS5A		OUTD-ECS5A			OUTD-ECS5A			OUTD-ECS5A	OUTD-ECS5A	OUTD-ECS5A	UTD-ECS5A (60 type only
Sub Interface Board			OUTY-XCBXE																	
Protective net				OUTZ-NXCA																ı

MULTI SPLIT Optional Parts List

Туре				Indoor Units for	2-4 Rooms Multi				Indoor Units fo	or 8 Rooms Multi			
.,,,,			Wall Mounted		Cassette	Duct	Wall Mounted		Floor	Floor/Ceiling	Cassette	Duct	
-		Compact		Large	Compact	Slim	Compact		Large	Floor	Floor/Celling	Compact	Slim
		ASAG07/09/12 LJCA	ASYG07/09/12/14 LUCA	ASAG18/24 LFCA	AUAG09/12/14/18 LVLA	ARAG09/12/ 14/18/24LLA	ASYG07/09/12/14 LUCA	ASYG07/09/12/14 LMCA	ASYG18LFCA ASYG24LFCC	AGY09/12/14LV	ABYG14/18LV	AUYG07/09/12/ 14/18LV	ARYG07/09LLTA ARYG12/14/18LLTB
ρ Wired Remote Controller	de la constant		• UTY-RVNYM				•UTY-RVNYM	•UTY-RVNYM	• UTY-RVNYM				
	High grade Standard grade	OUTY-RNNYM	●UTY-RNNYM	• UTY-RNNYM	●UTY-RNNYM	• UTY-RNNYM	●UTY-RNNYM	●UTY-RNNYM	OUTY-RNNYM	●UTY-RNNYM	•UTY-RNNYM	●UTY-RNNYM	●UTY-RNNYM
Simple Remote Controller	第四 概据	OUTY-RSNYM	●UTY-RSNYM	●UTY-RSNYM	●UTY-RSNYM	• UTY-RSNYM	●UTY-RSNYM	●UTY-RSNYM	OUTY-RSNYM	●UTY-RSNYM	●UTY-RSNYM	●UTY-RSNYM	●UTY-RSNYM
Central Remote Controller	For 8 Room						●UTY-DMMYM	• UTY-DMMYM					
IR Receiver Kit	For Duct					• UTY-LRHYM							●UTY-LRHYM
Remote Sensor Unit						• uty-xszx							●UTY-XSZX
Auto Louver Grille Kit						UTD-GXSA-W(For 09/12/14)UTD-GXSB-W(For 18)							 UTD-GXSA-W(For 07/0912/14) UTD-GXSB-W(For 18)
Fresh Air Intake Kit	For Compact For Cassette				● UTZ-VXAA							• UTZ-VXAA	
Air Outlet Shutter Plate	For Compact Cassette For Cassette				● UTR-YDZB							●UTR-YDZB	
Insulation Kit For High Humidity	For Compact Cassette				●UTZ-KXGC							• UTZ-KXGC	
Half concealed kit										●UTR-STA			
Communication Kit	`~ *	● UTY-XCBXZ1	●UTY-TWBXF					• UTY-XCBXZ2					
External Connect Kit (For Indoor)		•uty-xwzx	• UTY-XWZX5	●UTY-XWZX	●uty-xwzx	• UTY-XWZX	●UTY-XWZX5	• UTY-XWZX5	•uty-xwzx	•uty-xwzx	•uty-xwzx	•uty-xwzx	•uty-xwzx
External Connect Kit (For outdoor)							● UTY-XWZXZ3 ● UTY-XWZXZ4	● UTY-XWZXZ3 ● UTY-XWZXZ4	● UTY-XWZXZ3 ● UTY-XWZXZ4	• UTY-XWZXZ3 • UTY-XWZXZ4	• UTY-XWZXZ3 • UTY-XWZXZ4	• UTY-XWZXZ3 • UTY-XWZXZ4	● UTY-XWZXZ3 ● UTY-XWZXZ4
External Control Set						● UTD-ECS5A							●UTD-ECS5A

120

Wired Remote Controller: UTY-RVNYM

Hi-grade individual control using various functions.

- 3.7-inch LCD backlight screen.
- Supporting various Energy Saving functions with simple operation.
- Multiple Language Support.

(English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)



High performance and compact size

•In addition to the individual control, various energy saving controls can be realized using only one remote controller.




Various energy saving function

Auto OFF Timer

- The indoor unit automatically is turned off when it reaches the preset operating time frame.
- The time frame of the "Auto off timer" can be flexibly scheduled.
- Can be set off time 30 to 240 minutes


Weekly Timer function

- Can be set up to 8 times per day (On/Off, mode, Temp)
- 2 pattern settings(i.e. Summer/Winter setting) are available.




High visibility and Easy operation

- Icon display of effectual functions.
- Main functions in large icons: "Mode", "Set Temp", and "Fan".
- Easy to operate by Control guide display.
- Simple operation with easy 4-way navigation pad.




Set Temperature Auto Return

- The setting temperature automatically returns to the previously set temperature.
- The time range in which the set temperature can be changed is 30 to 120 minutes.



Set Temperature Upper and Lower Limit Setting

• The set temperature range can be set for each operation mode. (Cooling / Heating / Auto)



Specifications

Model name	UTY-RVNYM
Power supply	DC 12 V
Dimension (H × W × D) (mm)	120 × 120 × 21.3
Weight (g)	220

^{*} DC12 V is supplied by indoor unit.



Flexible Control

Operation with indoor unit


Auto Louver can be operated by synchronizing remote controller of indoor unit.

• UP and Down auto swing


- Auto airflow direction and auto swing
- 4 steps selectable

Auto-closing louver

When operation of indoor unit is stopped, the louver will automatically close.



Dimensions



						Unit: mm
Model Name	W1	W2	H1	H2	D1	D2
UTD-GXSA-W	683	645				
UTD-GXSB-W	883	845	180	148	9	84
UTD-GXSC-W	1,083	1,045				

Specifications

Model name			UTD-GXSA-W	UTD-GXSB-W	UTD-GXSC-W				
Applicable Indoor Unit			ARYG07/09LLTA ARYG12/14LLTB ARXD04/07/09/12/14GALH (For VRF)	ARXD24GALH (For VRF)					
Power Supply			Connecting with Control box of indoor unit						
Fixing of Auto Louver Grill	е		Screw fixing to Flange or Square Duct						
Extension Square Duct Lir	nit		1.0m (Max. duct length between indoor unit and Grille)						
Net Dimension (H x W x D)			180x683x(84+9) 180x883x(84+9) [7-3/32x26-7/8x(3-5/16+11/32)] [7-3/32x34-3/4x(3-5/16+1		180x1083x(84+9) [7-3/32x42-5/8x(3-5/16+11/32)]				
Maight	Net	kg	2.0 (4.4)	2.5 (5.6)	3.0 (6.7)				
Weight	Gross	(lb.)	3.0 (6.7)	4.0 (8.9)					
Color			White						
Louver Motor			Stepping Motor						
Accessories			Fitting Flame, etc.						
	Cooling	°C (°F)	18 to 32 (64 to 90)						
Operation range	Cooming	% RH		80% or less					
	Heating	°C (°F)	16 to 30 (60 to 88)						


122|

Controllers

For Individual & Centralized Control Wired Remote Controller Wired Remote Controller Simple Remote Controller **Central Remote Controller** UTY-RVNYM UTY-RNNYM / UTB-YUD UTY-RSNYM / UTB-YPB UTY-DMMYM For 8 Rooms Multi Cool Room 7 Faces 8

Communication devices



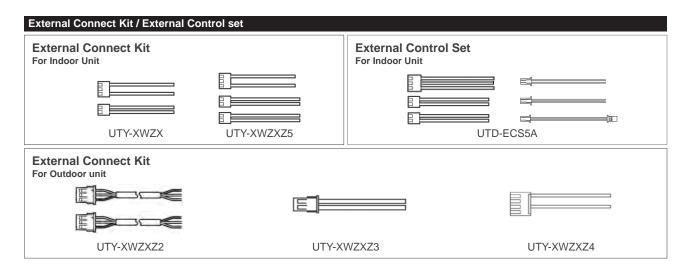


Function list


			For Indoor unit		For Outdoor unit				
		UTY-XWZX	UTY-XWZXZ5	UTD-ECS5A	UTY-XWZXZ2	UTY-XWZXZ3	UTY-XWZXZ4		
	Control	•	•	•	_	_	_		
Input	Peak cut	_	_	_	•	•	_		
	Low noise	_	_	_	•	•	_		
	Priority	_	_	_	_	•	_		
	Emergency stop	_	_	_	_	•	_		
Output	Operation status	•	•	•	•	•	_		
	Error status	_	•	●*1	•	•	_		
	Fresh air control	_	_	★2	_	_	_		
	Auxiliary heater	_	_	●*3	_	_	_		
	Preparation	_	_	●*4	_	_	_		
	Base heater	_	_	_	_	_			

- * 1 : This function has been had only wall mounted model such as LT, LU, and LM.
- * 2 : This function has been had only ducted model, cassette model , and ceiling mode.
- * 3 : This function has been had only ducted model. * 4 : This cable is necessary for some ducted model.

Others

For Duct type Long-Life Filter **Remote Sensor Unit IR Receiver Kit Auto Louver Grille Kit** UTY-XSZX / UTD-RS100 UTD-GXSA-W UTD-LF60KA UTY-LRHYM / UTY-LRHY1 / New amenity space can be For 07 / 09 / 12 / 14 type UTD-LF25NA UTY-LRJY1 offered by installing the Remote sensor. UTD-GXSB-W or UTD-LF60KA UTD-LF25NA Flange **Drain Pump Unit**



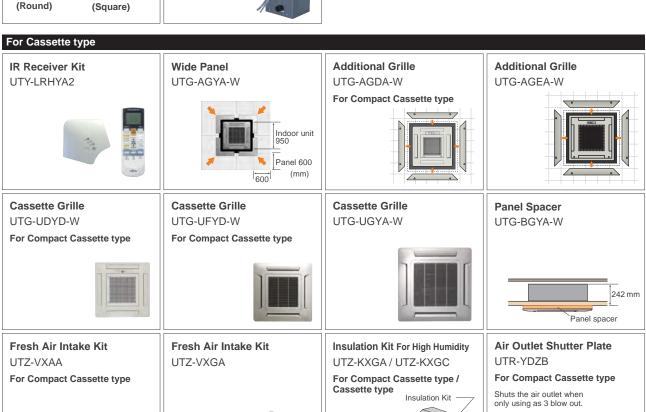





125 124

UTR-YDZC