

### AIRSTAGE™ Floor

AGYA007/009/012/014GAH

Compact & Comfort



## Flexible & easy installation

Point

Due to compact and whole surface suction method model, floor, concealed, half concealed, or wall mounted installation can be available to match the room layout.




## 2-Fan & Wide airflow


Point

Individual vertical airflow by 2-fan can control the whole room comfortably.

Cooling



Heating



## Quiet operation


Point

Quiet operation is realised by 6 fan speed control. (via 2 wire controller)

Low noise  
**22 dB(A)**

at 007/009 models

6-Step Speed




\* Compatible Remote Controller is as follows:

UTY-RNRYZ2 / UTY-RSRY / UTY-RHRY / UTY-DCGY / UTY-DTGYZ1 / UTY-ALGX / UTY-APGX

# Flexible piping connection 6 direction of drain & piping

Drain hose and piping can be drawn flexibly in the right, left, side, and down directions

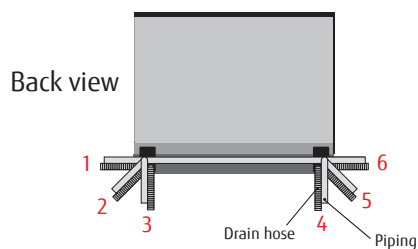

## Specifications

Model name			AGYA007GCAH	AGYA009GCAH	AGYA012GCAH	AGYA014GCAH
Power source			Single-phase, ~230V, 50Hz			
Capacity	UK Total Cooling	kW	1.60	2.10	2.70	3.00
	UK Sensible Cooling		1.40	1.70	2.30	2.50
	UK Heating		2.60	3.00	3.70	4.20
	Nominal Cooling		2.20	2.80	3.60	4.00
	Nominal Heating		2.80	3.20	4.00	4.50
Input power		W	16	17	22	29
Airflow rate	High	m <sup>3</sup> /h	470	500	590	670
	Med-H		420	450	520	590
	Med		390	400	470	520
	Med-L		360	360	420	450
	Low		330	330	390	390
	Quiet		270	270	340	340
Sound pressure level	High	dB(A)	37	38	42	46
	Med-H		35	36	39	42
	Med		33	34	37	39
	Med-L		31	31	35	36
	Low		29	29	33	33
	Quiet		22	22	30	30
Dimensions (H × W × D)		mm	600 x 740 x 200			
Weight		kg	15			
Connection pipe diameter	Liquid (Flare)	Inch	3/8		1/4	
	Gas (Flare)		1/2			

Note : Specifications are based on the following conditions.


Cooling : Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
 Heating : Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
 Pipe length : 7.5 m; Height difference between outdoor unit and indoor unit : 0 m.  
 Voltage : 230 [V].  
 When AGY\*007GCAH, and AGY\*009GCAH are connected to the outdoor unit other than J-III, gas pipe diameter should be 1/2.

## Dimensions

### Models:

AGYA007GCAH / AGYA009GCAH / AGYA012GCAH / AGYA014GCAH

(Unit : mm)

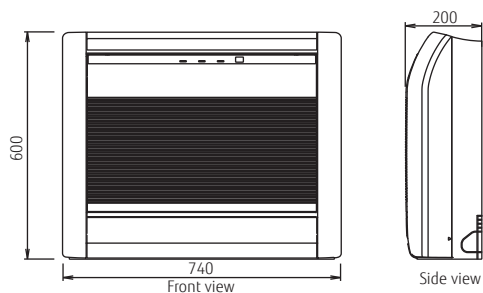

## Optional parts

Wired Remote Controller: UTY-RNRYZ2  
 Wireless Remote Controller: UTY-LNHY  
 Simple Remote Controller: UTY-RSRY, UTY-RRHY

- Specifications and design are subject to change without notice for further improvement.
- "AIRSTAGE" are worldwide trademarks of FUJITSU GENERAL LIMITED and are registered trademarks in Japan and other countries or areas.
- Other company and product names mentioned herein may be registered trademarks, trademarks or trade names of their respective owners.

• Actual products' colours may be different from the colours shown in this printed material.  
 Distributed by: