

# Submittal Data: ASU7RLF



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction


Submitted By: \_\_\_\_\_

Unit Designation: \_\_\_\_\_ Schedule No. \_\_\_\_\_ Model No.: \_\_\_\_\_

### Capacities:

Cooling	7,000 BTU/h
Outdoor Design Temp. <i>F° DB/WB</i>	95/75
Heating	8,100 BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
<b>HSPF</b>	
Ducted	9.3
Non-Ducted	9.8
Mixed	9.5
<b>SEER</b>	
Ducted	14.7
Non-Ducted	17.0
Mixed	15.8
<b>EER Cooling</b>	
Ducted	8.7
Non-Ducted	9.25
Mixed	8.97
Voltage/Frequency/Phase	208-230/60/1
Motor Type	E.C.M.
Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	37/33/29/25
Noise Level Heating <i>db (A) - H/ M/ L/ Q</i>	37/33/29/25
Weight	18 lbs.
<b>Refrigerant Piping:*</b>	
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

### OUTLINE AND DIMENSIONS

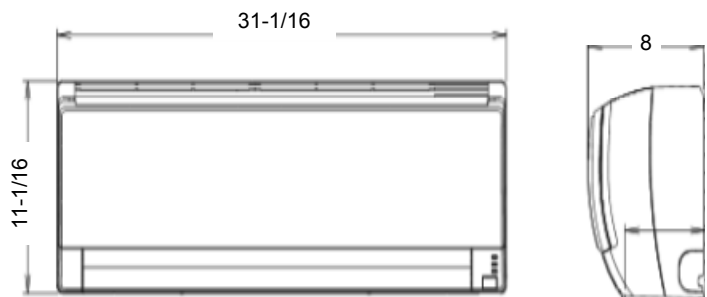

### Standard Features:

- ◆ Seven year compressor warranty
- ◆ Five year parts warranty
- ◆ Digital wireless remote control
- ◆ Auto Louver: Up/Down
- ◆ Apple Catechin / Ion Deodorizing Filters
- ◆ Sleep Timer
- ◆ Auto Restart/ Reset
- ◆ 24 hour timer
- ◆ Quiet Mode
- ◆ Dry mode
- ◆ Refrigerant R410A

### Notes:

---

---

---

---

---

---

---

---

---

---

\*Piping lengths vary by outdoor unit. See outdoor unit submittal sheet for detailed specifications.

