

Job Name: _____

Date: _____

Location: _____

Approval: _____

Engineer: _____

Construction: _____

Submitted to: _____

Unit #: _____

Submitted by: _____

Drawing #: _____

Reference: _____



Technical Features

Electrical

Power Supply..... 12DCV, 55mA

Temperature

Operating Temperature Range..... 32°F - 104°F (0°C - 40°C)
 Humidity Range..... 0 - 93% HR (no condensation)

Dimensions and Weight


H x W x D In(mm)..... 2-3/4 x 4-1/4 x 1-1/8 (70 x 108 x 28)
 Weight..... 0.17 lbs. (80 g)
 Color..... White
 Mounting..... Wall
 LED Indicators..... 1x Device Status
 Warranty..... 2 years warranty
 Enclosure UL Approved..... ABS (UL 94 HB)
 RoHS Conformity..... Compliant with RoHS directive (2002/95/CE)
 Certifications.. CE conformity to EMC directive (2004/108/EC) and low voltage directive (2006/95/EC)
 EN 60950-1
 EN301489-1 v1.8.1

General Features

The wired Wi-Fi Device for the Halcyon line is an external module that connects the indoor units to the Wi-Fi network to manage the indoor climate remotely, using a simple smartphone, tablet, or PC via the internet.

Features:

- Controlled via a webpage or using the iOS or Android app.
- A wireless (Wi-Fi) device installed in each unit controls operation.
- Server in the cloud manages the whole process.
- Turn the mini-split on before arriving home.
- Change the program if the user is arriving home late.
- Displays current room temperature.
- Ability to check if system is still on after leaving your home and turn it off.
- Programmable calendar scheduler built-in to program the mini-split in an easy, intuitive way.
- Error reporting
- Available in several languages.
- Available in Fahrenheit or Celsius.
- Save money without losing comfort.
- Get instant alarm notifications.
- 2 year warranty
- Interaction with Geo-localization, Weather Forecast, Voiceover, Voice Commands, Mail, Push Notifications, and many more.

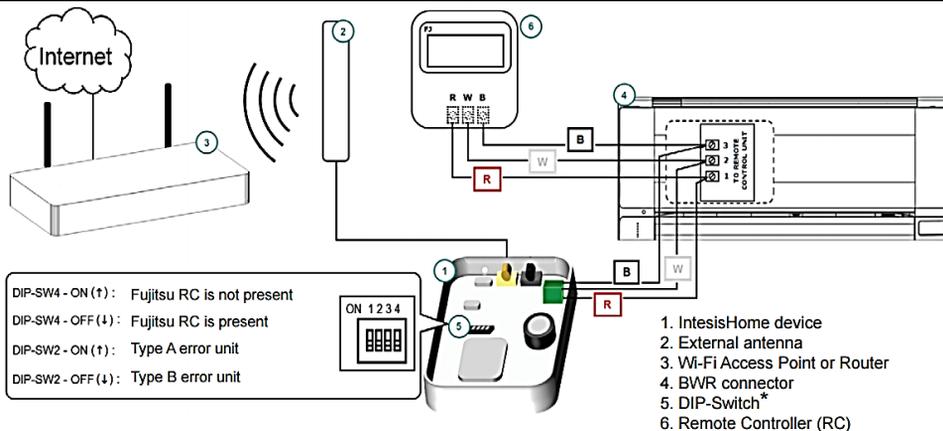

Sell Sheet



FAQ's



QIG Wired

Model Compatibility

Type	Indoor unit Model	Required plug	Required interface module			
Compact Wall Mounted (ASU)	7, 9, 12, RLF	K9705932012	UTY-XCBXZ2			
	7, 9, 12, RLF1					
Wall Mounted (ASU)	9, 12, 15 RLS2		K9705932012	UTY-TWBXF1		
	9, 12, 15 RLS3					
Wall Mounted (ASU)	18, 24 RLF			K9705932012	N/A	
	18CL, 24 CL1					
	30, 36 CLX1					
	30 RLX					
	18, 24 RLB					
	30, 36 RLXB					
Floor (AGU)	9, 12, 15 RLF	K9705932012				N/A
Compact Cassette (AUU)	7, 9, 12, 18, RLF					
Ceiling/Universal (ABU)	36, RSLX		N/A			
	18, 24 RULX					
Large Cassette (AUU)	18, 24, 36, 42, RCLX					
Ducted (ARU)	7, 9, 12, 18, 24 RLF					

Dimensions

Unit: in (mm)

