


Light Commercial & Commercial, Residential

# CONTROL SYSTEM & OPTIONAL PARTS

- C-002 Control System Overview
- C-006 Best Control Solution for Each Building Structure
- C-008 Comparison Table of Controllers
- C-052 Controller System List
- C-068 Optional Parts Overview
- C-076 Optional Parts List
- C-084 Function List

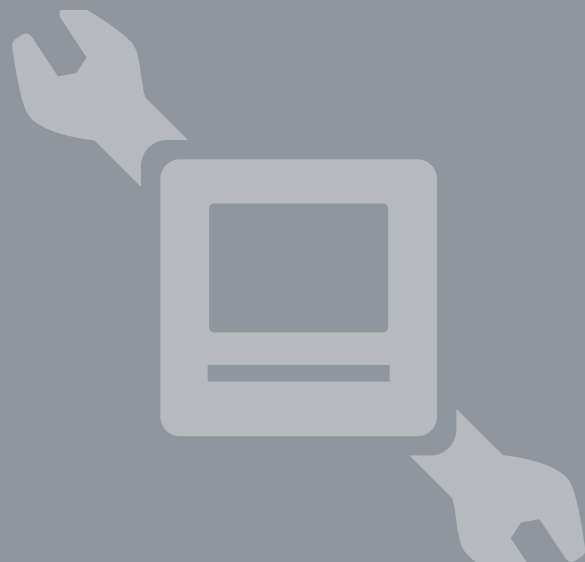

A wide product lineup to meet a variety of needs

We can flexibly meet customer needs through a variety of offerings including wired and wireless individual remote controllers, central remote controllers that simultaneously control multiple indoor units, and a variety of converters that link with other systems.

## CONTROL SYSTEM

### INDIVIDUAL CONTROL

- C-010 Wired remote controller (Design type)
- C-012 Wired remote controller (with touch panel)
- C-014 Wired remote controller / Compact wired remote controller
- C-015 Wired remote controller
- C-016 Simple remote controller
- C-017 Wireless remote controller
- C-019 IR receiver unit

### CONVERTERS/ADAPTERS

- C-022 WLAN adapter
- C-025 Multiple protocol WLAN adapter

### CENTRALIZED CONTROL




- C-026 Home central remote controller
- C-028 Central remote controller
- C-030 Touch panel controller
- C-034 System controller **Software** / System controller lite **Software**

### CONVERTERS/ADAPTERS

- C-038 MODBUS® converter for indoor unit
- C-039 MODBUS® interface
- C-040 MODBUS® converter for VRF
- C-041 BACnet® interface
- C-042 BACnet® gateway **Software**
- C-043 BACnet® gateway **Hardware**
- C-044 BACnet®/MODBUS® router
- C-045 BACnet®/MODBUS® cloud device
- C-046 KNX® converter for indoor unit / KNX® converter for VRF
- C-047 KNX® interface
- C-048 Network converter for single-split type
- C-049 Network converter for LONWORKS™
- C-050 External switch controller / Signal amplifier

## OPTIONAL PARTS

- C-070 Silver ion filter
- C-071 Auto louver grille kit
- C-072 Pressure sensor kit
- C-073 External power supply unit  
AIR BEAM radiation air outlet unit
- C-074 Gas sensor kit
- C-092 Separation tube and other piping products

-  SPLIT
-  MULTI-SPLIT
-  VRF J series
-  VRF V series

# Control System Overview

## for Split & Multi-split

All indoor units\* are equipped with a wireless or wired remote controller as standard. Additional options are available, such as individual remote controllers and central remote controllers. The easy-to-operate central remote controller makes it simple to control the operation mode, temperature, airflow volume, timer, and other functions of each indoor unit from a single location.

\* Except for some products

### Air Conditioning Individual Control



#### Wired remote controller

A built-in thermo sensor monitors and controls room temperature accurately.



#### Wireless remote controller


Simple and versatile operations with a choice of 4 different types of timers



#### Simple remote controller

Compact remote controller with basic functionality

For Ceiling type



For Duct type



For Cassette type



#### IR receiver unit


This IR receiver unit enables a wireless remote controller to control a duct-type indoor unit.

### Air Conditioning Centralized Control



#### Home central remote controller for 5 & 6-unit Multi-split type

Enables individual and central control.

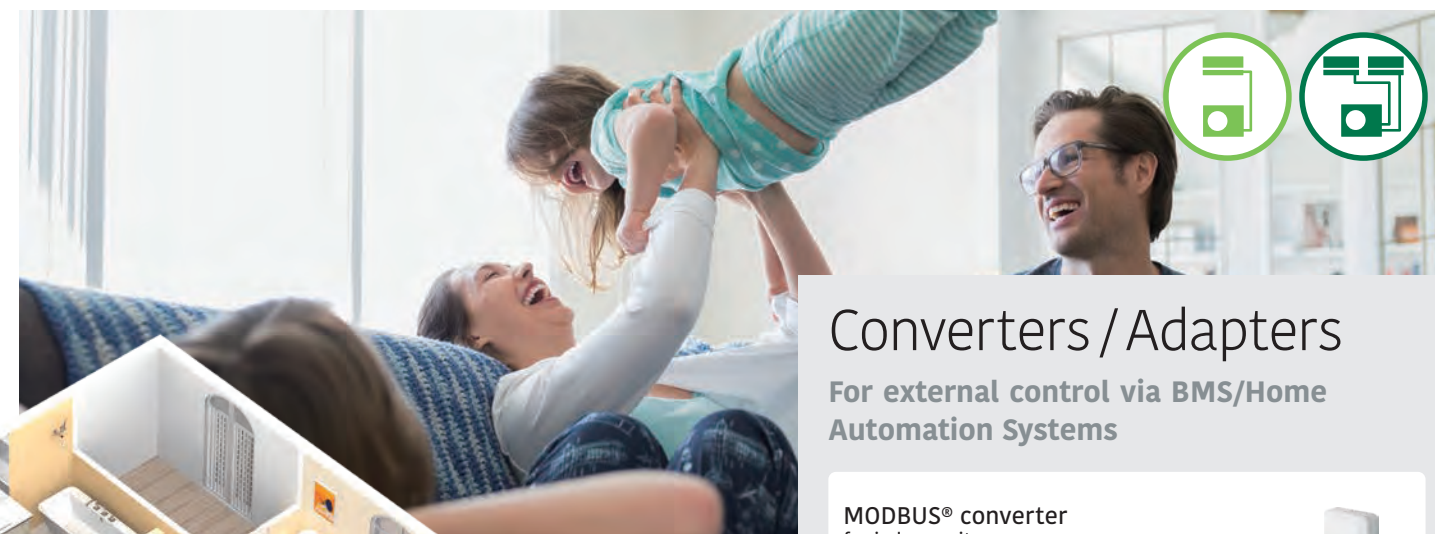

### Converters / Adapters

For external control via BMS/Home Automation Systems

MODBUS® converter for indoor units  
UTY-VMSX



MODBUS® interface for indoor units



KNX® converter for indoor units  
UTY-VK SX



KNX® interface for indoor units



WLAN adapter



Network converter

DC power supply type  
UTY-VTGX



AC power supply type  
UTY-VTGXV



### Online Control (Wireless Control via Smartphone/Tablet)

With the WLAN adapter and the AIRSTAGE Mobile app, you can control the heating and cooling of your home anytime, anywhere.

#### WLAN adapter

The dedicated WLAN adapter enables the air conditioner to be operated by smartphone or tablet computer.




AIRSTAGE Mobile

Download Free  
Download on the App Store  
GET IT ON Google play

#### Simple, user-friendly interface design

The designed screen display makes it easier than ever to operate.

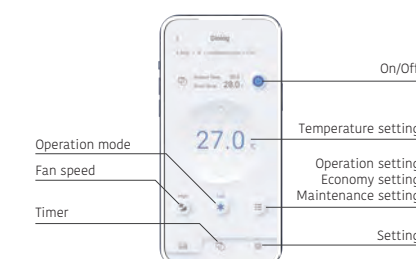




# Control System Overview

for VRF


To meet the diverse needs of customers, we offer a variety of control options for our VRF systems, such as individual control, centralized control, and building management system (BMS) options.

Air Conditioning


Individual Control




Wired remote controller  
(Design type)  
UTY-RVRY




Wired remote controller  
(with touch panel)  
UTY-RNRYZ5




Wired remote controller  
UTY-RLRY




Compact wired remote controller  
UTY-RCRYZ1




Simple remote controller  
UTY-RSRY  
UTY-RHRY  
Without operation mode




Wireless remote controller  
UTY-LNVY  
UTY-LNHY



For Duct type



For 1-way Flow cassette Series/  
3D-flow cassette Series/duct type



for Circular flow cassette Series

IR receiver unit


UTB-YWC  
for duct type

UTY-TRHX  
for 1-way Flow cassette Series  
3D flow cassette Series/  
duct type

UTY-LBHDX  
for Circular flow cassette Series

Air Conditioning


Centralized Control

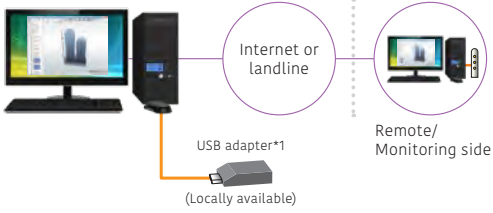

System controller **Software**  
UTY-APGXZ1/UTY-ALGXZ1 (Lite version)


Up to **1600**  
Indoor units

\*1: Echelon® U10 USB Network Interface  
\*2: The Lite version controls up to 400 indoor units.




Touch panel controller  
UTY-DTGYZ1

Up to **400**  
Indoor units



Central remote controller  
UTY-DCGYZ3


Up to **100**  
Indoor units




Converters / Adapters

For external control via BMS/Home Automation Systems


BACnet® gateway  
UTY-ABGXZ1 **Software**




VTY-VBGX **Hardware**




BACnet® interface for Indoor units  
FG-IR-BMG1Z1




Network converter (For LonWorks™)  
UTY-VLGX




MODBUS® converter for Indoor units  
UTY-VMSX




for VRF  
UTY-VMGX




KNX® converter for Indoor units  
UTY-VKX




for VRF  
UTY-VKGX




WLAN adapter  
UTY-TFSXJ3 / UTY-TFSXZ1




External switch controller  
UTY-TERX



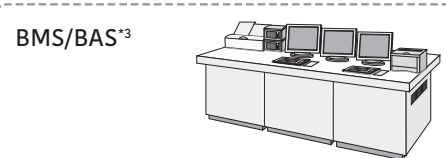

BMS/BAS<sup>\*3</sup>

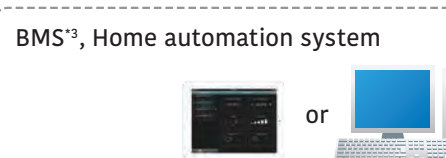

BMS<sup>\*3</sup>, Home automation system


Card-key  
(Locally available)

Internet device


Converters / Adapters

for system expansion


Network converter  
DC power supply type  
UTY-VTGX



Network converter  
AC power supply type  
UTY-VTGXV



Signal amplifier  
UTY-VSGXZ1



C-004









C-005

CONTROL SYSTEM  
& OPTIONAL PARTS












# Best Control Solution for Each Building Structure

Fujitsu General provides the best control solutions suitable for various building structures.











## SHOP

<div>Type</div> <div></div>	Individual control	Centralized control			Integrating control (Interface)		
							
	Wired remote controller	Central remote controller	Touch panel controller	System controller	Network converter for LonWORKS™	MODBUS® Converter	KNX® converter
	UTY-RVRY UTY-RNRYZ5 UTY-RLRY UTY-RVNYM UTY-RCRYZ1	UTY-DCGYZ3	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-VLGX	UTY-VMGX	UTY-VKGX
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	●	●	●	●			
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.		●	●	●	●	●	●
Group control		●	●	●			
Advanced energy saving: Peak cut, Operation of indoor unit lead lag etc.				●			
Remote monitoring management		●	●	●			
Manage multiple sites		●	●	●			
Monitor energy consumption				●			
Control third-party products				●			
Integrate Fujitsu General air conditioning into BMS					●	●	●

## HOTEL

Type	Individual control			Centralized control			Integrating control (Interface)				
											
	Wired remote controller UTY-RVRY UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	Simple remote controller UTY-RSRY UTY-RHRY	Wireless remote controller UTY-LNVY UTY-LNHV UTY-LNTY	Central remote controller UTY-DCGYZ3	Touch panel controller UTY-DTGYZ1	System controller UTY-APGXZ1 UTY-ALGXZ1	BACnet® gateway UTY-ABGXZ1 UTY-VBGX	Network converter for LonWorks™ UTY-VLGX	MODBUS® converter UTY-VMGX	KNX® converter UTY-VKGX	External switch controller UTY-TERX
Local control for hotel guests	●	●	●								
Centralized air conditioning control for common areas				●	●	●	●	●	●	●	
Limited control for hotel guests				●	●	●	●	●	●	●	
Remote monitoring management				●	●	●					
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.						●	●				
Monitor energy consumption						●					
Control third-party products						●					
Integrate Fujitsu General air conditioning into BMS							●	●	●	●	
Interlock with window contact											●
Interlock with key card											●

## OFFICE

Type	Individual control			Centralized control			Integrating control (Interface)				
											
	Wired remote controller UTY-RVRY UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	Simple remote controller UTY-RSRY UTY-RHRY	Wireless remote controller UTY-LNVY UTY-LNHV UTY-LNTY	Central remote controller UTY-DCGYZ3	Touch panel controller UTY-DTGYZ1	System controller UTY-APGXZ1 UTY-ALGXZ1	BACnet® gateway UTY-ABGXZ1 UTY-VBGX	Network converter for LonWorks™ UTY-VLGX	MODBUS® converter UTY-VMGX	KNX® converter UTY-VKGX	External switch controller UTY-TERX
Local control for office staff	●	●	●	●							
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	●		●	●	●	●	●				
Centralized air conditioning control for management				●	●	●	●	●	●	●	
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.				●	●	●	●	●	●	●	
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.						●	●				
Remote monitoring management				●	●	●					
Electricity charge apportionment					●	●	●				
Monitor energy consumption						●					
Control third-party products						●					
Integrate Fujitsu General air conditioning into BMS							●	●	●	●	
Interlock with door contact											●
Interlock with Occupancy sensor for meeting room				●							●



Comparison Table of Controllers

Item																			
Model name		UTY-RVRY	UTY-RNRYZ5	UTY-RLRY	UTY-RVNYM	UTY-RCRYZ1	UTY-RSRY	UTY-RHRY			UTY-LNTY	UTY-LNVY	UTY-LNHY	UTY-LNWX	UTY-DMMYM	UTY-DCGYZ3	UTY-DTGYZ1	UTY-ALGXZ1	UTY-APGXZ1
Maximum number of controllable remote controller groups		1	1	1	1	1	1	1			1	1	1	1	1	100	400	400	1600
Maximum number of controllable indoor units		16	16	16	16	1	16	16			16	16	16	16	8	100	400	400	1600
Maximum number of controllable groups		—	—	—	—	—	—	—			—	—	—	—	—	50	400	400	1600
Air conditioning control functions	ON/OFF	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●
	Operation mode setting	●	●	●	●	●	●	—			●	●	●	●	●	●	●	●	●
	Fan speed control	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●
	Room temperature setting	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●
	Set temperature in 0.5°C increments	●	●	●	—	●	●	●			—	●	—	—	—	●	●	—	—
	Setting temperature range limitation	●	●	●	●	—	●	●			—	—	—	—	—	●	●	●	●
	Test operation	●	●	●	●	●	●	●			●	●	●	●	—	●	●	—	—
	Vertical louver setting	●	●	●	●	●	●	●			●	●	●	—	—	●	●	●	●
	Horizontal louver setting	●	●	●	●	●	—	—			—	●	●	●	—	●	●	●	●
	Individual louver control	●	●	—	—	●	—	—			—	—	—	—	—	●	●*3	—	—
	Group setting	—	—	—	—	—	—	—			—	—	—	—	—	●	●	●	●
	Remote controller prohibition	—	—	—	—	—	—	—			—	—	—	—	—	●	●	●	●
	Anti-freeze setting	●	●	—	—	●	—	—			—	—	—	—	—	●	●	●	●
	Set temperature auto return	●	●	●	●	—	—	—			—	—	—	—	—	—	●	—	—
	Economy mode setting	●	●	●	●	●	—	—			●	●	●	●	●	●	●	●	●
	Occupancy sensor control	●	●	—	—	—	—	—			—	—	—	—	—	●	●	●	●
Displayed items	Error	●	●	●	●	●	●	●			—	—	—	—	—	●	●	●	●
	Defrosting	●	●	●	●	●	●	●			—	—	—	—	—	●	●	●	●
	Current time	●	●	●	●	—	—	—			●	●	●	—	—	●	●	●	●
	Day of week	●	●	●	●	—	—	—			—	—	—	—	—	●	●	●	●
	Remote controller prohibition	●	●	●	●	●	●	●			—	—	—	—	—	●	●	●	●
	Address display	●	●	●	●	●	●	●			—	—	—	—	—	—	●	●	●
	Room temperature	●	●	—	●	●	●	●			—	—	—	—	—	●*4	●*4	●*4	●*4
	Multiple language support	●	●	—	●	—	—	—			—	—	—	—	—	●	●	●	●
	Setting for daylight saving time	●	●	—	●	—	—	—			—	—	—	—	—	●	●	●	●
	Name registration	●	●	—	—	—	—	—			—	—	—	—	—	●	●	●	●
	Backlighting	●	●	—	●	●	●	●			—	●	—	●	—	●	●	—	—
	2D floor layout/3D building display	—	—	—	—	—	—	—			—	—	—	—	—	—	—	—	●
	Refrigerant leak detection	—	—	—	—	—	—	—			—	—	—	—	—	●	●	●	●
	Refrigerant Cycle Monitor	●	●	—	—	—	—	—			—	—	—	—	—	—	—	—	—
	Logo Display	●	—	—	—	—	—	—			—	—	—	—	—	—	—	—	—
	Limited Visibility of Settings	●	—	—	—	—	—	—			—	—	—	—	—	—	—	—	—
Timer	Schedule timer	Period	Week	Week	Week	Week	—	—			—	—	—	—	Week	Year	Year	Year	Year
		ON/OFF, Temp, Low noise mode*5, Times per day	8	8	4	8	—	—			—	—	—	—	4	20	20	144	144
	ON/OFF timer	—	●	●	●	●(OFF only)	—	—			●	●	●	●	—	—	—	—	—
	Sleep timer	—	—	—	—	—	—	—			●	●	●	●	—	—	—	—	—
	Program timer	—	—	—	—	—	—	—			●	●	●	●	—	●	—	—	—
	Auto-off timer	●	●	●	●	—	—	—			—	—	—	—	—	●	●	—	—
	Day off	●	●	●	●	—	—	—			—	—	—	—	●	●	●	●	●
Control	Minimum unit of timer setting (minutes)		1 • 10	10 • 30	30	30	—	—			5	5	5	5	5	10	10	10	10
	Remote monitoring management system		—	—	—	—	—	—			—	—	—	—	—	●	●	●	●
	Electricity charge apportionment		—	—	—	—	—	—			—	—	—	—	—	—	○	○	●
	Error history		●	●	●	●	—	—			—	—	—	—	—	●	●	●	●
	Emergency stop		—	—	—	—	—	—			—	—	—	—	—	●*2	●*2	—	—
	Remote monitoring management		—	—	—	—	—	—			—	—	—	—	—	●	●	○	●
	Energy-saving management		—	—	—	—	—	—			—	—	—	—	—	—	—	○	○
	E-mail notification in case of failure		—	—	—	—	—	—			—	—	—	—	—	●	●	●	●
	Key lock		● Child lock	● Child lock	● Child lock	● Child lock	—	—			—	—	—	—	● Child lock	● Password setting	● Password setting	● Password setting	● Password setting
	Low noise mode		—	—	—	—	—	—			—	—	—	—	●	●	●	●	●

\*1 "Operation mode" setting not available.  
\*2 Available only for external input control.

\*3 Monitoring sites can be set up.  
The main unit side can only be operated to cancel the settings.

\*4 Available only when using Wired remote controller.  
\*5 UTY-DCGYZ3 only

●: Supported   ○: Optional function   —: Unsupported

# Wired Remote Controller (Design type)

UTY-RVRY



Up to  
**16** indoor units  
Up to  
**1** group



reddot winner 2024



## Simple and stylish design that harmonizes with the space

- The stylish design controller, UTY-RVRG, enables intuitive operation with touch screen. It is compatible with many 2-wired indoor units.

## Harmonizes with The Installation Space

When not in use, the controller is a part of the interior décor. This is achieved by using mirrors, glass, and clear panels, and it appears to be one with the wall.

The sleek and stylish design won the 2022 Good Design Award and was selected as a finalist for the 2023 IDEA award.



## Intuitive Operation

The touch screen is easily operated by swiping vertically and horizontally, and users can operate the controller without using manuals.

Temp. Setting



Operation Mode



## Status Indicator Lamp Colors

When not in use, the operation mode is indicated through indicator lamp colors shown under the controller. The indicator lamp can be switched ON and OFF to avoid glare at night.



Blue: Cooling



Red: Heating



Green: Dry



Purple: Auto

## Features: Wired Remote Controller (Design type)

### Refrigerant Cycle Monitor

The controller will display specific sensor values of outdoor and indoor units for maintenance and service support.

\* Display screen example


\* This function is only supported by split units, using the H-Serial communication protocol. Example: ASYH30KMTB



### Logo Display

The controller can display hotel logos when not in use. Images are sent via Bluetooth® connection where data is saved in the flash memory built into each controller.

\* Color display available

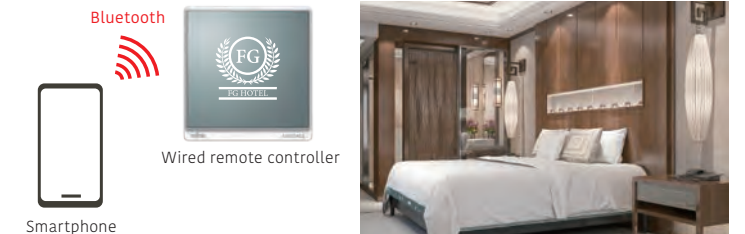

## AIRSTAGE Remo Set Application (free download)



Set up your wired remote controller via Bluetooth from your smartphone (or directly at the controller).

Features:

- Initial configuration
- Function setting
- Custom logo import
- Copy settings between controllers




Wired remote controller



## Initial Settings / Indoor Unit Function

The initial controller settings and indoor unit function settings can be sent from a smartphone by pairing with the controller via Bluetooth. It also can read the setting values of a paired controller, and send a copy of them to one or more additional controllers, significantly reducing installation time.

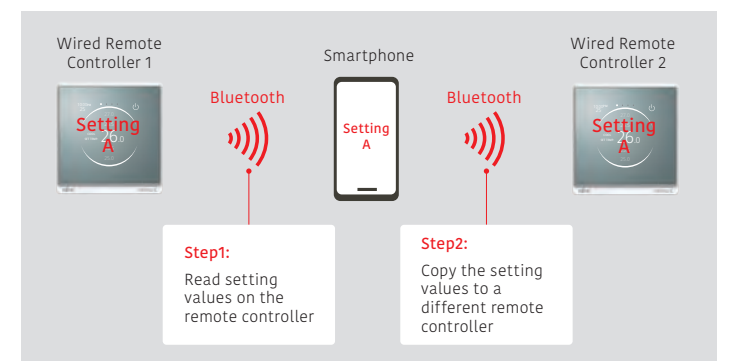

\*Smartphone : Wired Remote Controller = 1 : 1

## Specifications

Model name	UTY-RVRY
Power Source	DC12V
Dimensions (H × W × D) (mm)	121.5 × 116 × 26
Weight (g)	225



# Wired Remote Controller (with touch panel)

UTY-RNRYZ5



Up to  
**16** indoor units  
Up to  
**1** group

## Easy Operation Due to Large High-Resolution STN-LCD Touch Panel Screen

- Touch screen LCD
- Built-in daily/weekly timer (ON/OFF, temperature, modes)
- Backlit screen for easy operation in the dark.
- Room temperature display
- Controls up to 16 indoor units
- Supports 12 languages: Chinese, Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, and Turkish
- Nonpolar 2-core type

## High Performance and Compact Size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.



## Accurate Control for Comfort

A thermo sensor built into the remote controller monitors room temperature accurately.



Room temperature display  
Room temperature sensor

## Energy Saving Controls

### Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

\* Not available for some models

### Auto-off timer



- While the Auto-off timer is activated, if the set off time is specified as, for example, one hour, the power will automatically turn off one hour after the start of operation.
- A desired time frame can be specified for the Auto-off timer.
- The off-time can be set from 30 to 240 minutes.

### 2-setting weekly timer

### Set temperature auto return

### Setting temperature range limitation

Cooling set temp. 27°C, Heating set temp. 26°C

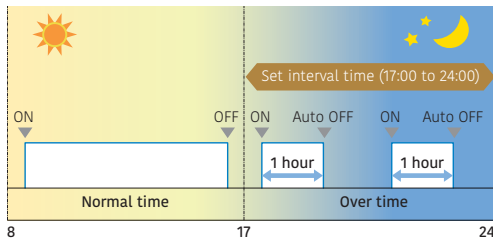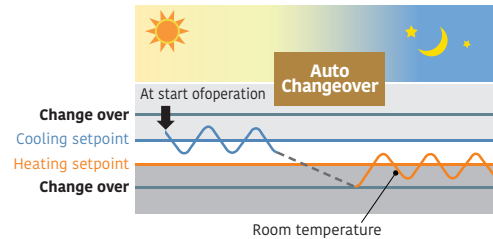


e.g.) Between 17:00 and 24:00 (over time hours), when the 1 hour set off time has elapsed, the system will automatically turn off the indoor unit as it has been judged to be "forgotten to turn off." Set off time for over time hours: 1 hour

## Features: Wired Remote Controller (Touch Panel)

## Refrigerant Cycle Monitor (option)

Wired Remote Controller (Touch Panel) will support to display some sensor values for maintenance and service support.


\* This function is only supported by split units, using the H-Serial communication protocol. Example: ASYH30KMTB

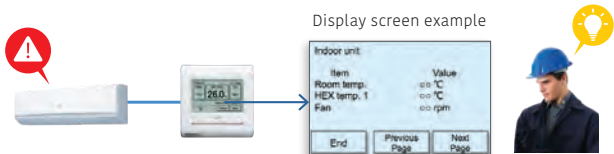

## Multi System Control\*1


### 1) Lead Lag Operation

Standby Indoor Unit can be selected in lead lag operation. By this, the Indoor units will last longer than operating by nonstop.

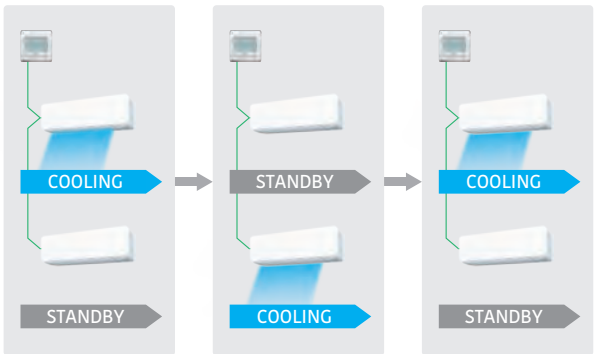


### 2) Back Up Operation

In case of unexpected Indoor unit error, other Indoor units will start providing back up operation.

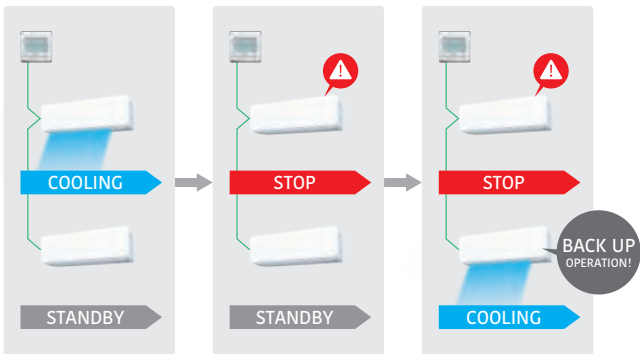

### 3) Lag Operation

In case of unexpected room temperature rise, other Indoor Units will start providing lag operation.

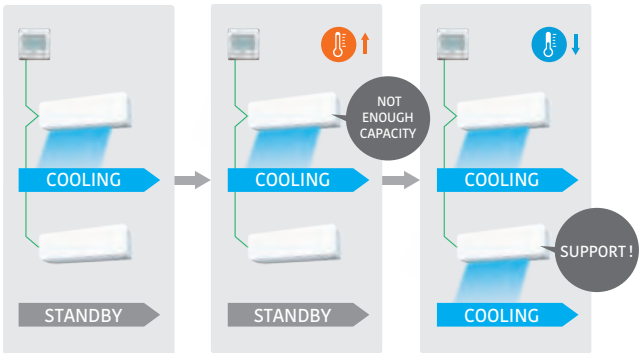

\*1: "Lead Lag Setting" is an easy-to-use function for room temperature control when using multiple indoor units, while reducing the burden placed on each indoor unit. If you wish to make use of this function, ensure you use indoor units equipped with a "Special Cooling" function. For Split products with "Special Cooling" function, refer to S-068 to S-071. If you use indoor units that do not have a "Special Cooling" function, under certain conditions, there is a chance that "Backup operation" may not operate correctly, and the "Lead Lag Setting" function will not give the expected results. Additionally, for rooms that require strict conditions, such as server rooms, please consider other appropriate measures. Please note that we will not provide compensation for any damages suffered to your appliances or data as a result of using this function. For more details, please confirm with your nearest retail store.

## Specifications

Model name	UTY-RNRYZ5
Power Source	DC 12 V
Dimensions (H × W × D) (mm)	120 × 120 × 20.4
Weight (g)	220

DC 12 V is supplied by the indoor unit.

# Wired Remote Controller

UTY-RLRY



Up to  
**16** indoor units  
Up to  
**1** group

- ON/OFF/Weekly timer settings
- A built-in thermo sensor monitors and controls room temperature accurately.
- When something goes wrong, an error code is displayed.
- 16 error codes from the most recent one will be kept in the history. (Last 16 error codes can be accessed)
- Nonpolar 2-core type


## High Performance and Compact Size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.




## Visually Intuitive Operation

- The operation mode, set temperature, and fan speed are shown prominently on the top screen.
- Each function to be set is indicated by an icon.
- The control guide makes it simple and straightforward to operate a remote controller.

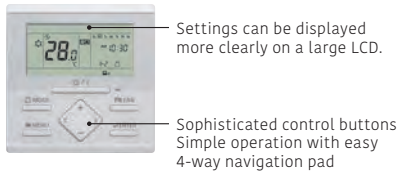

# Compact Wired Remote Controller

UTY-RCRYZ1




Up to  
**1** indoor units  
Up to  
**1** group

- Simple design that matches stylish interiors
- The body of the controller, which is easy to install, is designed to conform to the European standard junction box.
- Can be operated both by wireless and wired remote controller.
- Nonpolar 2-core type


## Large Screen and Simple Display

- Large screen but compact size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.

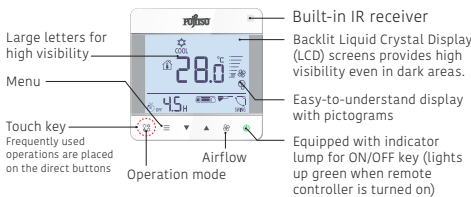


## System Overview

VRF connection

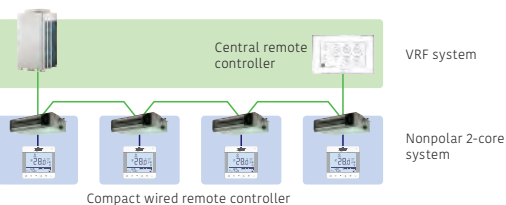

RAC connection



### Specifications

Model name	UTY-RLRY	UTY-RCRYZ1
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 17	86 × 86 × 44
Weight (g)	170	135

12 V DC supplied by an indoor unit

# Wired Remote Controller

UTY-RVNYM




Up to  
**16** indoor units  
Up to  
**1** group

## Hi-Grade Individual Control with a Wide Range of Functions

- 3.7-inch backlit LCD screen.
- Supports energy-saving functions with simple operation.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish

## Visually Intuitive Operation

- Each function is displayed as an icon.
- Main functions are indicated by large icons: “Mode,” “Set Temp,” and “Fan”
- Easy operation with control guide display
- Simple operation with easy 4-way navigation pad



## High Performance and Compact Size

- A single remote controller controls each connected indoor unit and provides a variety of energy-saving options.



# Wired Remote Controller

UTY-RNNYM




Up to  
**16** indoor units  
Up to  
**1** group

- Simple operation with Built-in Weekly/Daily Timer.
- Control up to 16 indoor units.
- Up to 2 Wired remote controllers can be connected to a single indoor unit.

## Accurate Control for Comfort

A thermo sensor built into the remote controller monitors room temperature accurately. The wired remote controller and an optional Remote sensor can be installed in any location to meet any requirement.

Examples of sensor changes

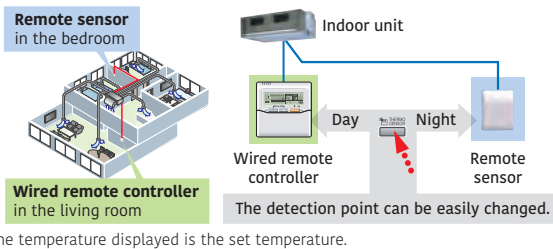

## Built-in Timer

**Weekly timer:** ON/OFF time can be set to operate twice for each day of the week.  
**Temperature setback timer:** Sets the time to change the temperature setting and the time to hold the setting for each day of the week.  
At “Weekly timer” + “Temperature setback timer” setup

### Specifications

Model name	UTY-RVNYM	UTY-RNNYM
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3	120 × 120 × 18
Weight (g)	220	160

12 V DC supplied by an indoor unit



## Simple Remote Controller

UTY-RSRY / UTY-RHRY (without operation mode)



UTY-RSRY

UTY-RHRY  
(Without operation mode)

Up to  
**16** indoor units  
Up to  
**1** group

### Compact Remote Controller with Basic Functionality


- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Simple design that matches stylish interiors
- Large LCD screen and easy-to-use control buttons
- Backlight: White backlight makes it easy to operate in the dark.
- Nonpolar 2-core type

### Supports a Variety of Applications


- **Vertical louver control:** Adjusts the vertical airflow direction of a duct-type indoor unit with an auto louver or a cassette type installed in a hotel room or a conference room.



- **Setting temperature range limitation:** Enables an indoor unit to operate in an energy-saving manner in a small building not equipped with a central remote controller.

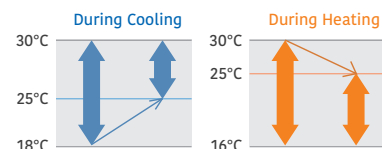

- **Built-in room temperature sensor:** Monitors and controls room temperature accuracy.



#### Specifications

Model name	UTY-RSRY	UTY-RHRY
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 75 × 19.4	120 × 75 × 19.4
Weight (g)	120	120

12 V DC supplied by an indoor unit

## Wireless Remote Controller

UTY-LNTY



Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

### Simple and Versatile Operations with a Choice of 4 Different Types of Timers

#### Built-in Timer

4 timer programs: ON/OFF/Program/Sleep

Program timer: Sets ON/OFF time once for every 24 hours.

Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

#### Easy Installation and Operation

Different codes can be assigned to up to 4 indoor units to prevent a mix-up.

Wide and precise transmitting range

## Wireless Remote Controller

UTY-LNWX



NEW




Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

### Simple and Comfort Control

#### Setting Temperature Range Limitation


Enables an indoor unit to operate in an energy-saving manner in a small building not equipped with a central remote controller.

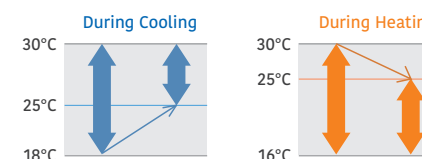

#### Precise Control

The setting temperature can be adjusted precisely depending on the environment as the controller can set the temperature via 0.5°C\*.

\*Depends on the indoor unit

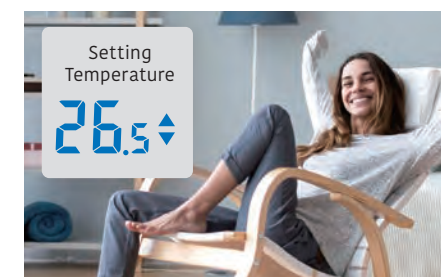

#### Specifications

Model name	UTY-LNTY	UTY-LNWX
Power source	3.0V (1.5V R03/LR03/AAA x 2)	3.0V (1.5V R03/LR03/AAA x 2)
Dimensions (H × W × D) (mm)	205 × 61 × 17	162 × 45 × 17.5
Weight (g)	125	66

12 V DC supplied by an indoor unit

# Wireless Remote Controller

UTY-LNVY



Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

## Stylish Design with Backlight

- It has adopted a simple and stylish design.
- The built-in backlight allows the screen to be seen even in dark rooms.

## Built-in Timer

4 timer programs: ON/OFF/Program/Sleep  
Program timer: Sets ON/OFF time once for every 24 hours.  
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

## Error Diagnosis

It can detect the reason for system errors easily.  
When an error is detected, the error code number can be checked using the remote controller display.

## Precise Control

The setting temperature can be adjusted precisely depending on the environment as the controller can set the temperature via 0.5 °C\*.  
\*Depends on the indoor unit

# Wireless Remote Controller

UTY-LNHY



Up to  
**16** indoor units  
Up to  
**1** group  
Up to  
**4** different daily timers

## Simple and Versatile Operations with a Choice of 4 Different Types of Timers

## Built-in Timer

4 timer programs: ON/OFF/Program/Sleep  
Program timer: Sets ON/OFF time once for every 24 hours.  
Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

## Easy Installation and operation

Different codes can be assigned to up to 4 indoor units to prevent a mix-up.  
Wide and precise transmitting range


### Specifications

Model name	UTY-LNVY	UTY-LNHY
Battery	3.0V (1.5V R03/LR03/AAA x 2)	3.0V (1.5V R03/LR03/AAA x 2)
Dimensions (H x W x D) (mm)	181 x 58 x 17	170 x 56 x 19
Weight (g)	116	85

12 V DC supplied by an indoor unit

# IR Receiver Unit for Duct type

UTY-LRHYM / UTY-LBTYM

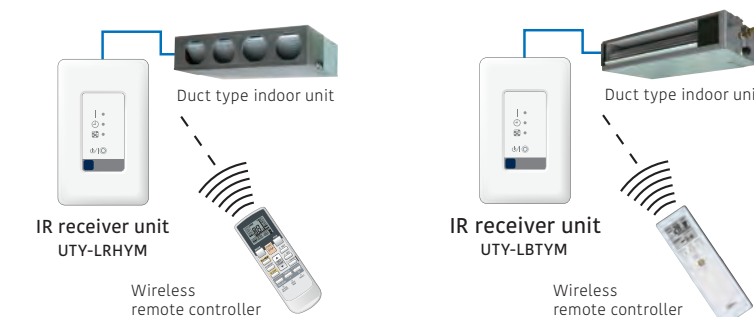

The wireless remote controller controls duct type indoor units.

# IR Receiver Unit for Cassette


UTY-LBTYC



Cassette type indoor unit can be controlled with a wireless remote controller.

# IR Receiver Unit for ceiling type

UTY-LBTYH

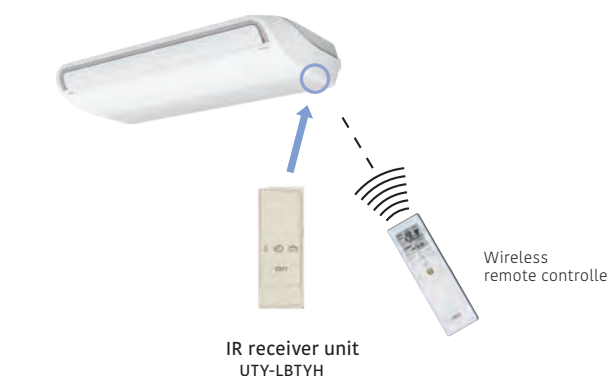

The wireless remote controller controls ceiling type indoor units.

### Specifications

< Wireless Remote Controller >

Model name	UTY-LRHYM	UTY-LBTYM	UTY-LBTYC	UTY-LBTYH
Battery	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)
Dimensions (H x W x D) (mm)	170 x 56 x 19	205 x 61 x 17	205 x 61 x 17	205 x 61 x 17
Weight (g)	85	125	125	125

< IR Reciver Unit>

Battery	DC5V	DC5V	DC5V	DC5V
Dimensions (H x W x D) (mm)	145 x 90 x 30	145 x 90 x 30	—*	—*
Weight (g)	150	150	140	100

DC 5 V is supplied the indoor unit.

\*It will replace the parts of the indoor unit to be connected.






## IR Receiver Unit for Duct type

UTB-YWC / UTY-TRHX

The wireless remote controller controls duct type\* indoor units.

\*Large airflow duct types do not work with this IR receiver unit.

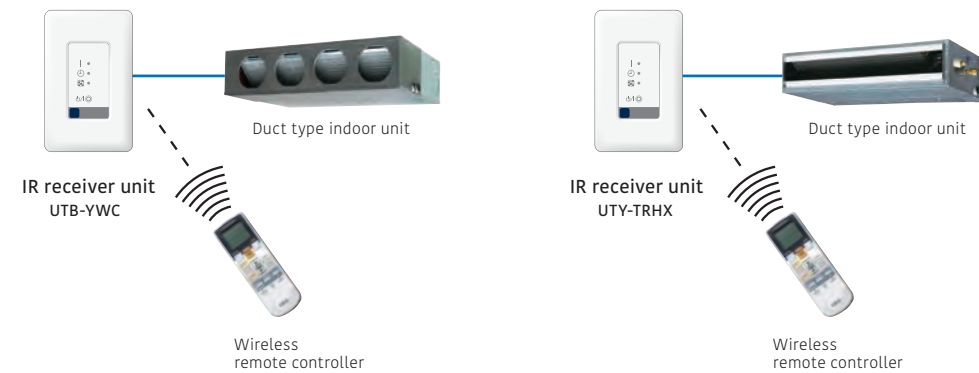


\*A separate wireless remote control (model: UTY-LNHY) is required.

## IR Receiver Unit for cassette

UTY-LBHxD / UTY-TRHX



Cassette type indoor unit can be controlled with a wireless remote controller.

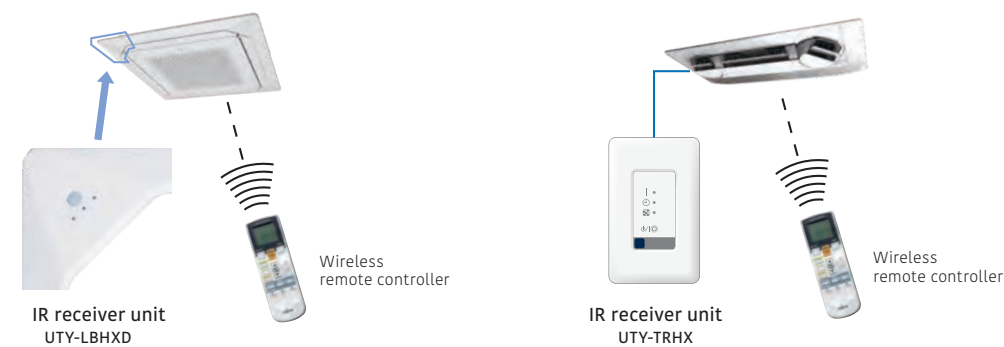

\*A separate wireless remote control (model: UTY-LNVY or UTY-LNHY) is required.

### Specifications

< Wireless Remote Controller >

Model name	UTB-YWC	UTY-LBHxD	UTY-TRHX
Battery	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)	1.5 V (R03/LR03/AAA)
Dimensions (H × W × D) (mm)	170 × 56 × 19	170 × 56 × 19	170 × 56 × 19
Weight (g)	85	85	85

< IR Receiver Unit >

Model name	UTB-YWC	UTY-LBHxD	UTY-TRHX
Battery	DC5V	DC5V	DC5V
Dimensions (H × W × D) (mm)	145 × 90 × 30	-*	145 × 90 × 30
Weight (g)	150	140	150

DC 5 V is supplied the indoor unit.

\*It will replace the parts of the indoor unit to be connected.



# WLAN Adapter

UTY-TFSXH3 / UTY-TFSXJ3



USB type for single split models  
UTY-TFSXH3



UTY-TFSXJ3  
(CN connector type)

Up to  
**1** indoor unit



## AIRSTAGE Mobile

“AIRSTAGE Mobile” is an application software that enables you to manage the Fujitsu General’s air conditioner(s) with a mobile device from anywhere.

- Maximum 5 accounts per 1 indoor unit
- Room / Outdoor temperature display
- Can be used for a Single / Multi and VRF indoor units.
- No separate external power supply required



For iOS



For Android

## User Friendly for Everyone

Enjoy easy-to-use centralized operation of air conditioners via a smartphone anytime, anywhere



Image\*



House Owner



Shop Owner



Commercial  
Building Owner

## Main Functions

- ON/OFF
- Operation mode
- Fan speed
- Louver position
- Set temperature control
- Weekly timer
- Room temperature display
- Outdoor temperature display
- Error display

\*Contents of display differ depending on the type of indoor unit.

## Ease of Use is Pursued to Achieve a Stylish Design


The more legible and accessible timer UI enables effortless schedule management.



Mode change



Fan speed change




Weekly timer



## Features: AIRSTAGE Mobile

### Centralized Operation for Flexible Remote Management of All Air Conditioners

AIRSTAGE Mobile is ideal for a wide range of applications, from large residential buildings to smaller commercial spaces such as offices and stores. Anyone who has a smartphone and an adapter can access to manage the system at a low cost.

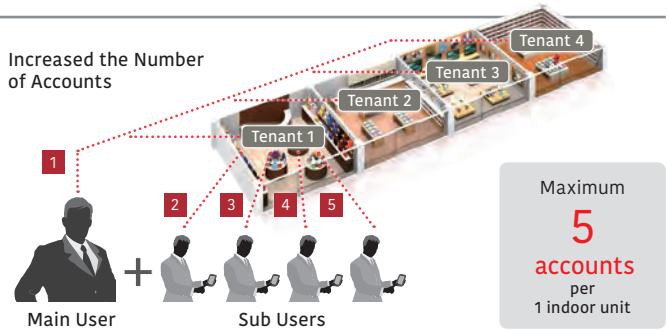


### Hierarchical Group Management

Multiple air conditioners can be combined into a single group for centralized operation. Several groups can also be organized at once. Grouping the air conditioners by building, floor, or room makes it easy for users to monitor their operation status and operate them quickly.



### Operate Air Conditioner and Check Its Operation Status Just by Talking to It

Connecting with a smart speaker allows the user to operate the air conditioner and check its operation status just by talking to it.

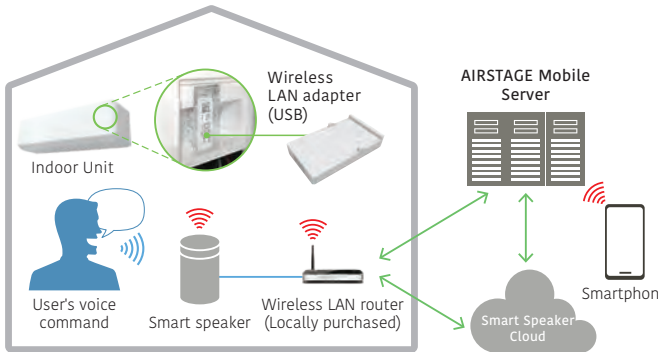

## Specifications

Model name	UTY-TFSXJ3(CN connector type)	UTY-TFSXH3
Dimensions (H × W × D) (mm)	71 × 38 × 15	56.7 × 34 × 9.72
Weight (g)	35	30



# WLAN Adapter

FG-RC-WIF1Z2 / FG-IR-WIF1Z1 / FG-AC-WIF1Z1



Intesis®  
BY HNS NETWORKS



FG-RC-WIF1Z2  
(3-wire RC-line type)

Intesis®  
BY HNS NETWORKS



FG-AC-WIF1Z1  
(CN connector type)

Intesis®  
BY HNS NETWORKS



FG-IR-WIF1Z1  
(IR type)


Up to  
1 indoor unit

## AC Cloud Control


- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required

## Installation Example


[3-wire RC-line type/CN connector type]

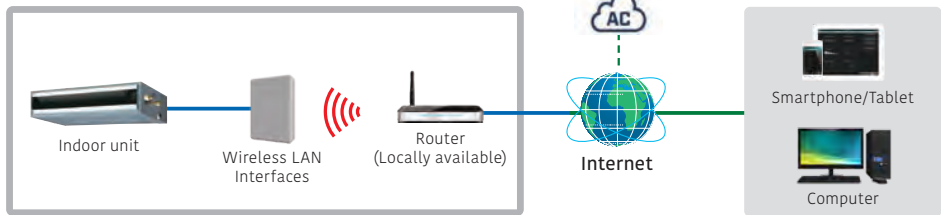

[IR type] Connection to wall-mounted type

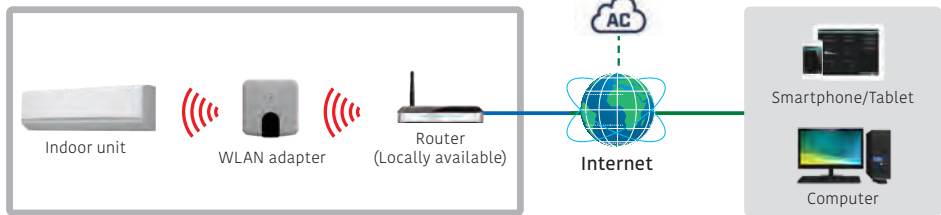

[IR type] Connects to the product with the optional receiver kit

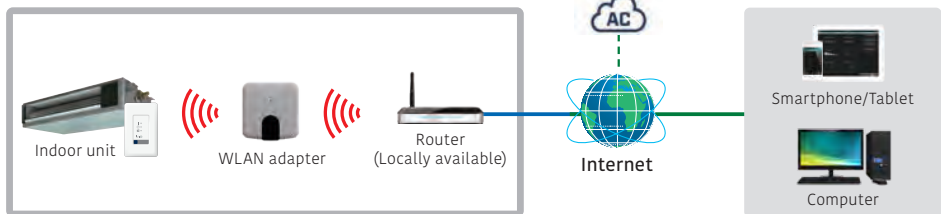

\*IR receiver required.

## Basic Control

- Turning air conditioner on and off
- Mode select (Heat, Cool, Dry, Auto, Fan)
- Louver position (airflow direction setting)
- Fan speed control
- Room temperature display
- Setting temperature
- Multiple language support
- One single scene is created.

## Advanced Control (optional functions)

- Climate-based operation modes (ECO, Comfort, and Powerful) (to be available in the future)
- Schedule functions (ON/OFF, modes, set temperature, fan speed, louver position)
- Setting temperature range limitation
- Multiple Scenes and Calendars are created.
- Smart Speaker compatibility
- Advanced internet service connections

## Notification and Operation History

- E-mail notification alerts
- Air conditioning malfunction alert
- Connectivity monitoring and alert
- Operation history (to be available in the future)

### Specifications

Model name	FG-RC-WIF1Z2 (3-wire RC-line type)	FG-AC-WIF1Z1 (CN connector type)	FG-IR-WIF1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	108 × 70 × 28	81 × 78 × 28	127 × 50 × 17
Weight (g)	80	76	80

# Multiple Protocol WLAN Adapter

FG-RC-WMP1Z1 / FG-IR-WMP1Z1 / FG-AC-WMP1Z1



Intesis®  
BY HNS NETWORKS



FG-RC-WMP1Z1  
(3-wire RC-line type)

Intesis®  
BY HNS NETWORKS



FG-AC-WMP1Z1  
(CN connector type)

Intesis®  
BY HNS NETWORKS



FG-IR-WMP1Z1  
(IR type)

Up to  
1 indoor unit

### Specifications


Model name	FG-RC-WMP1Z1 (3-wire RC-line type)	FG-AC-WMP1Z1 (CN connector type)	FG-IR-WMP1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	70 × 100 × 28	127 × 50 × 17	81 × 78 × 28
Weight (g)	98	80	76

## AC Cloud Control


- Air conditioner control of Home Automation systems via wireless LAN connection.
- No separate external power supply required

## Installation Example

[3-wire RC-line type/CN connector type]

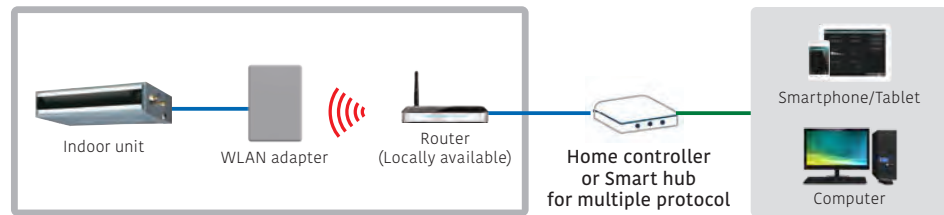

[IR type]

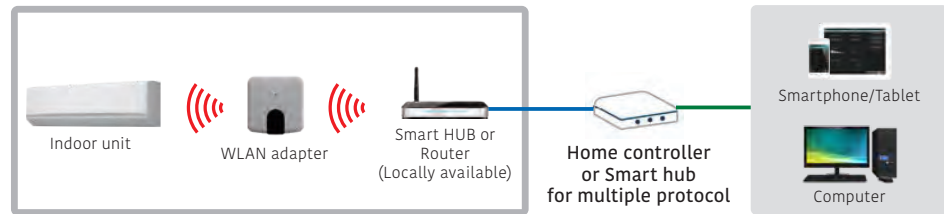

\*IR receiver required for other than wall-mounted type.

# Multiple Protocol LAN Adapter

FG-TL-BMKM16Z1



Intesis®  
BY HNS NETWORKS




FG-TL-BMKM16Z1  
(VRF type)

Up to  
16 indoor units

## Installation Example

[VRF type]

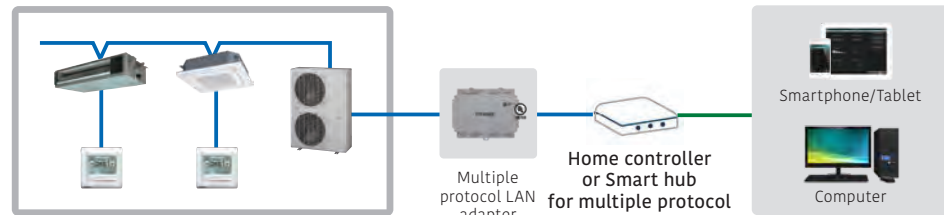

\*No separate external power supply required

### Specifications

Model name	FG-TL-BMKM16Z1 (VRF type)
Power supply	12 to 36 VDC, Max: 250 mA or 24 VAC 50-60 Hz, Max: 127 mA*
Dimensions (H × W × D) (mm)	90 × 106 × 58
Weight (g)	375

\*24 V DC power supply is recommended.

# Home Central Remote Controller

UTY-DMMYM / UTY-DMMYM1




Up to  
**1** multi-split system  
Up to  
**6** indoor units

## For 5-Unit and 6-Unit Multi-Split type

- Batched control of up to 6 indoor units For all indoor units connected to the remote controllers, the Home central remote controller sets room temperature, airflow volume, and remote controller prohibition from other remote controllers at once.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish.
- Large backlit indicator lamp screen
- Large, easy-to-see operation panel


### Example of system configuration

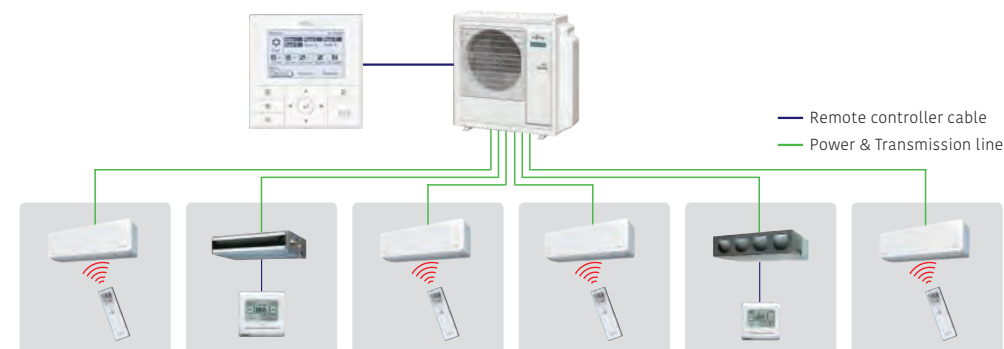

## Home Central Remote Controller

### Weekly timer

Up to 4 ON/OFF settings can be programmed per day. Two weekly patterns can be set, one for the cooling season and the other for the heating season.

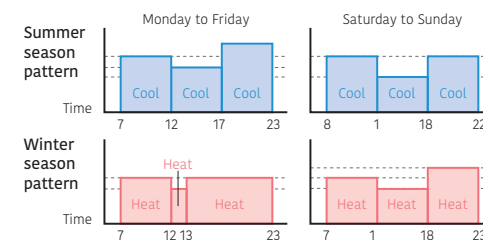

### Low noise operation

You can choose from 4 low noise levels depending on the installation environment. ON/OFF timing of low noise mode can be set with the timer.

### 10 °C heat operation

When you leave the house, the air conditioner runs a minimum heating operation to maintain the room temperature at 10°C.


\*Consult your dealer for conditions of use.

### Economy operation

When you select energy-saving economy mode, the temperature setting for the indoor unit increases (during cooling operation) or decreases (during heating operation) by 1°C and the maximum electric value of the outdoor unit is suppressed.

### Prohibiting local control, including settings such as child lock

The Home central remote controller is equipped with a lock function to prevent unauthorized operation from the remote controllers of the indoor unit in each room. The Home central remote controller is equipped with a child lock to prevent children from accidentally turning the air conditioner on or off or changing its settings.

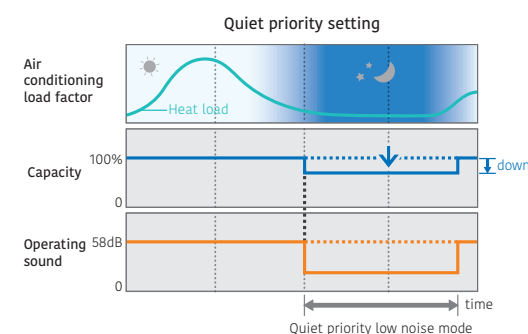

## Specifications

Model name	UTY-DMMYM/UTY-DMMYM1
Power source	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3
Weight (g)	220

12 V DC supplied by an indoor unit





# Central Remote Controller

UTY-DCGYZ3



Up to  
**100** indoor units  
Up to  
**50** groups

## For Tenants in Small to Midsize Commercial Premises

- Individual control and monitoring of up to 100 indoor units
- 7.0inch TFT color screen
- Visually intuitive operation
- Room temperature display by indoor unit sensor & remote controller sensor
- 50 Remote Controller Groups Display & remote controller group rename
- Supports 14 languages: Chinese (Simplified/Traditional), Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, Turkish, and Thai (Remote Management only)


## Easy Operation

### Air conditioning management by detecting room temperatures of each room

The room temperature detected with indoor unit sensor or remote controller sensor can be displayed. This model can detect the room temperature by indoor units sensors even if wired remote controllers are not connected to the indoor units.



\*Room temperature is displayed only when indoor unit operates.

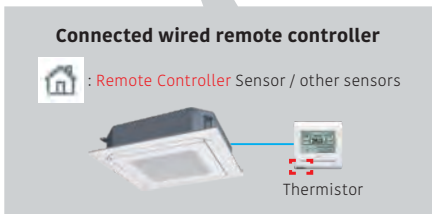

### 50 Remote Controller Groups Display


The group display and the 50 remote controller groups display can be switched easily. Users can choose which display is better, depending on the situation.

#### Group Display



Manage & Monitor  
by each Groups


#### 50 Remote Controller Groups Display

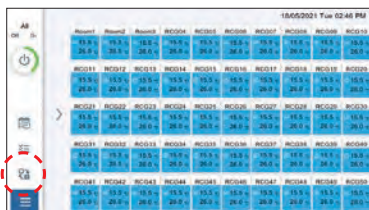

Manage & Monitor  
by 50 Remote Controller Groups


### Remote Controller Groups Rename

The remote controller group names can be changed. Users can know easily where the air conditioning is located by changing the remote controller group names.

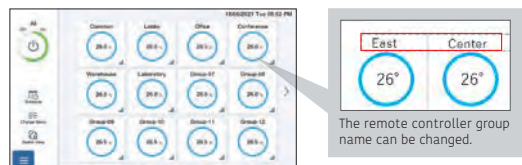


## Features: Central Remote Controller

- Easy intuitive operation from the touch panel display.
- All functions can be accessed through the monitoring screen showing a pop-up window for detailed operation.

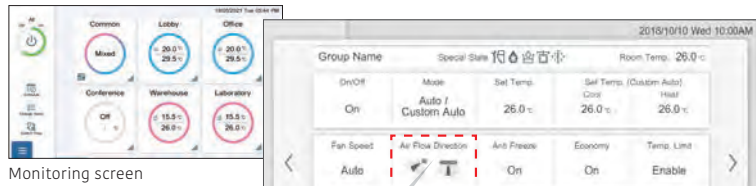

Monitoring screen


Individual setting

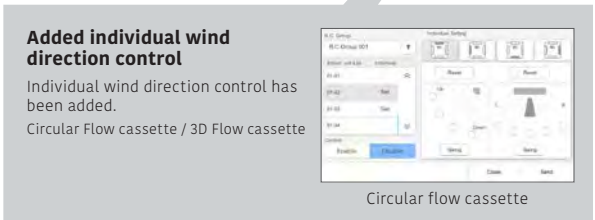

### Added individual wind direction control

Individual wind direction control has been added.  
Circular Flow cassette / 3D Flow cassette

Circular flow cassette

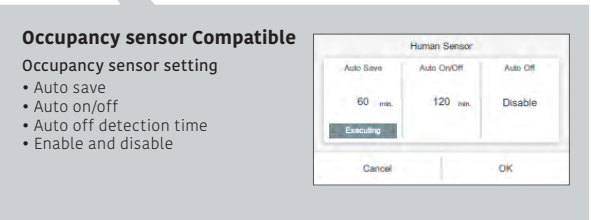

### Occupancy sensor Compatible

#### Occupancy sensor setting


- Auto save
- Auto on/off
- Auto off detection time
- Enable and disable

## Remote Management

### Remote monitoring / Remote operation

The central remote controller can control your tenant's air conditioner anytime and anywhere. When the central remote controller manages the indoor units of some tenants, air conditioning of each tenant can be managed separately online.

### Increased the Number of Accounts

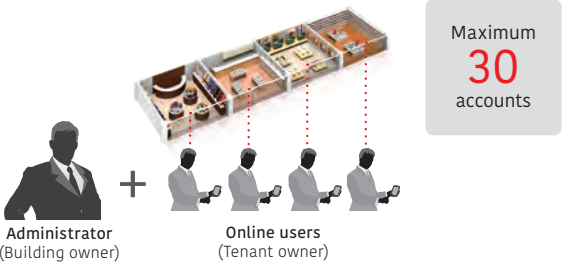

Maximum  
**30**  
accounts

### Trouble support function

#### Display error details

Display descriptive explanation when an error occurs



### Sensor value monitoring function

Monitor sensor data of indoor unit / outdoor unit, send mail

### Notify room temperature by email\*


Notify by e-mail when the temperature around the air conditioner is too high or too low

\*This function is available only when using wired remote controller.

## Schedule Management

### Annual schedule

- An annual schedule can be arranged for each remote controller group or user-defined group.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.

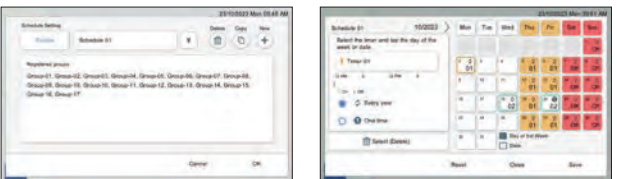

### low noise schedule

Low noise operation of outdoor units can be scheduled.



### Automatic return to set temperature

A function that automatically returns the changed temperature to its original value over time.

## Specifications

Model name	UTY-DCGYZ3
Power Supply	100-240 V 50/60 Hz
Dimensions (H × W × D) (mm)	134.6 × 216.2 × 37.9
Weight (g)	800



# Touch Panel Controller


UTY-DTGYZ1



- Large 7.5-inch TFT color LCD screen
- Touch screen operation
- Stylish design to fit nicely into any room environment
- Controls up to 400 indoor units.
- Icon or list view can be selected in monitoring mode.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.
- Mounted with LAN adapter for remote control & operation, external input/output with emergency stop and batch ON/OFF

## Easy Operation

- Wide range of simple-to-understand icons
- Operate by pressing the icons on the screen with your finger or a stylus.
- The color on the back identifies the current control operation; blue is for monitoring and green is for operational control.

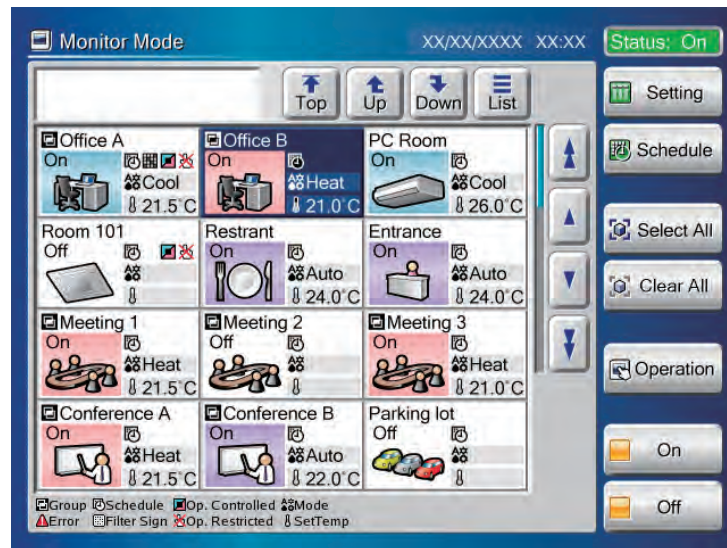

Up to  
**400** indoor units

Up to  
**100** outdoor units

Up to  
**400** groups

## Easy Maintenance

- The flat touch panel can be easily cleaned.
- Touch panel controller with non-glare coating to prevent finger marks
- Front cover for easy removal.




## Easy Installation

- The touch panel controller can be mounted on a wall.
- Flat back surface enables easy installation anywhere on a wall.
- No additional parts or components required for installation




## Controls Up to 400 Indoor Units

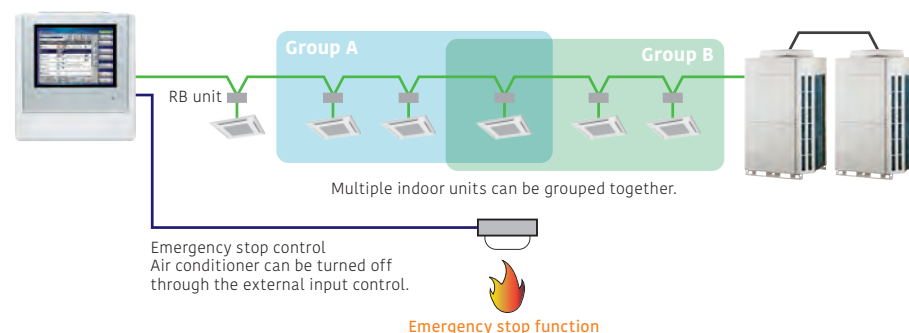

## Features:

### Control & Monitoring

- Control and monitor Fujitsu General air conditioners via LAN or internet.
- Users and tenants can manage their assigned equipment from anywhere by computer or tablet.
- When something goes wrong, an error notice is sent by e-mail for prompt troubleshooting.

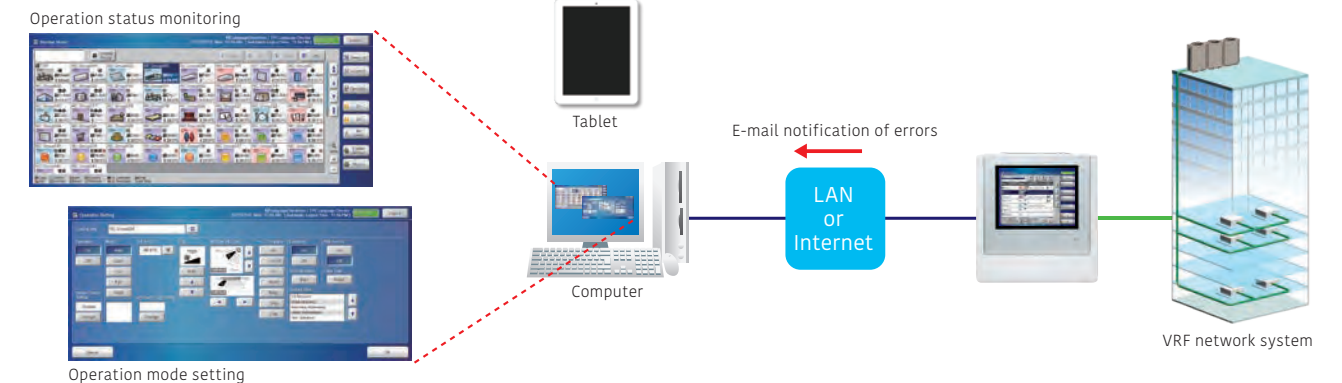

### Smartphone


Model name	Browser
Nexus 6P (Android 7.1.1)	Google Chrome 5.5
iPhone 7 (iOS 10.1)	Safari 10

### Tablet

Model name	Browser
iPad Pro 9.7 inch (iOS 10.2.1)	Safari 10


## Flexible access permissions can be granted to users at each point level.

The administrator can register multiple users and permit them to access any indoor unit and any functions.

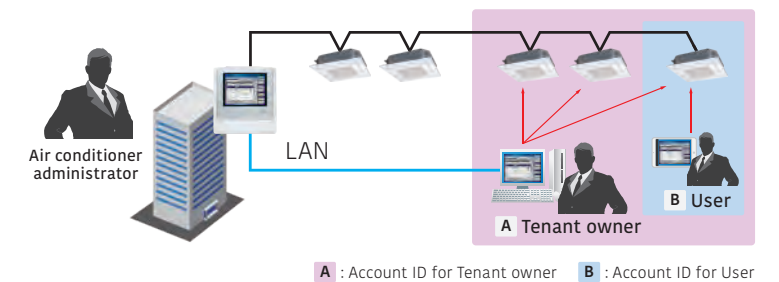

## Additional Languages


Supports 7 languages as standard: Chinese, English, French, German, Polish, Russian, and Spanish. Create a language database to integrate additional languages into the remote device. The added languages will only be displayed on the remote device and cannot be added to the Touch panel controller.

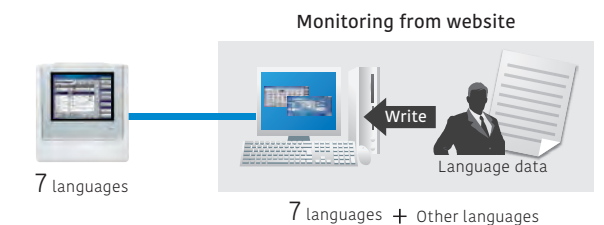

## Electricity Charge Apportionment (Option: UTY-PTGXA)

- Energy cost can be calculated and allocated to each billing user in proportion to the amount of energy used for air conditioning.

- Apportionment charge/bill calculation
- Tenant (block) setting
- Common facilities apportionment setting
- Rated power consumption allotment
- Individual calculations for cooling and heating
- Electricity meter supported

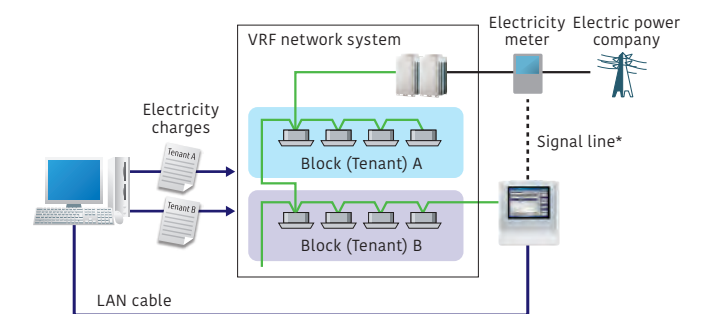

\* An electricity usage meter can be connected to an external input connector of the Touch panel controller. In that case, the meter cannot be connected to an outdoor unit at the same time.

## Features:


## Automatic Setting for Daylight Saving Time

## Functions provided

- Schedule setting for daylight saving time
  - It prevents the user from forgetting to set daylight saving time. In addition, it saves time and effort for the user.


## Automatic clock adjustment

- Time can be set for all controllers in a batch automatically.

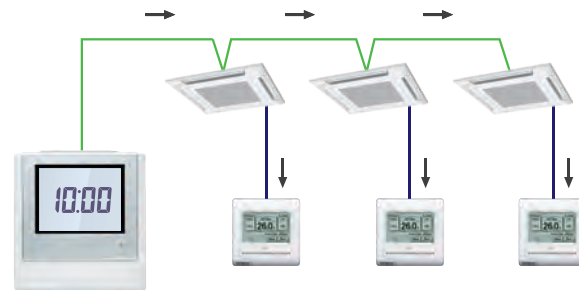


## Outdoor Unit Low Noise Operation

You can choose from 4 low noise levels depending on the installation environment.  
ON/OFF timing of low noise mode can be set with the timer.

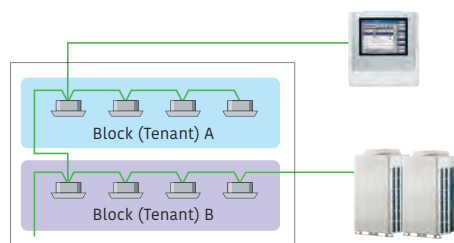

## Quiet priority setting

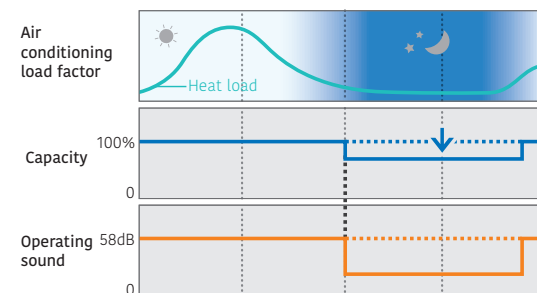

## Energy-Saving Controls


## Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

\* Not available for some models



Cooling set temp. 28°C, Heating set temp. 18°C

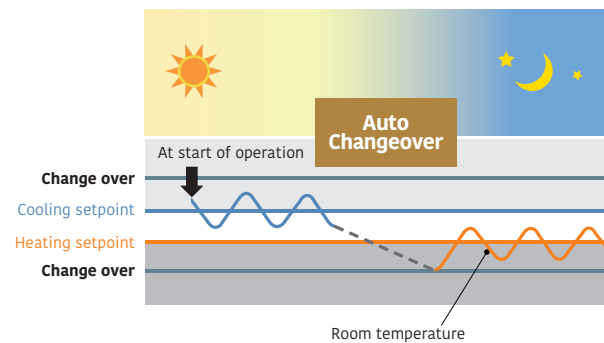



## Refrigerant Leak Detection

Refrigerant leakage status is indicated by the management equipment. A pop-up message is displayed to notify the user, and the refrigerant is shut off.



Pop-up highlighting

## FUNCTIONS SUMMARY



	 UTY-DTGYZ1	 Monitoring side
<b>Air conditioning control functions</b>		
ON/OFF	●	●
Operation mode setting*	●	●
Fan speed control	●	●
Room temperature setting	●	●
Setting temperature range limitation	●	●
Test operation	●	●
Vertical louver setting	●	●
Horizontal louver setting	●	●
Individual louver control	●*1	●
Group setting	●	●
Remote controller prohibition	●	●
Anti-freeze setting	●	●
Set temperature auto return	—	●
Energy-saving controls	—	●
Economy mode setting	●	●
Occupancy sensor control	—	●
<b>Displayed items</b>		
Error	●	●
Defrosting	●	●
Current time	●	●
Day of week	●	●
Remote controller prohibition	●	●
Cooling/heating priority	●	●
Address display	●	●
Room temperature	●*3	●*3
Multiple language support	●	●
Setting for daylight saving time	●	●
Time zone setting	●	●
Name registration	●	●
Backlighting	●	●
Language setting	7	7+other
Filter sign reset	●	●
Memory operations	●	●
Refrigerant leak detection	●	●

●: Supported ○: Optional function —: Not supported

\*1 Only setting cancellation can be operated.

\*2 Only available for external input control.

\*3 Available only when using a Wired remote controller.

		 UTY-DTGYZ1	 Monitoring side
<b>Timer</b>			
Schedule timer	Period	Year	Year
	ON/OFF, Temp, Mode, Times per day	20	20
ON/OFF timer		—	—
Sleep timer		—	—
Program timer		—	—
Auto-off timer		—	●
Day off		●	●
Minimum unit of timer setting (minutes)		10	10
<b>Control</b>			
Remote monitoring management system		●	●
Electricity charge apportionment		○	○
Error history		●	●
Emergency stop		●*2	●*2
Remote monitoring management		—	●
Energy-saving management		—	—
E-mail notification in case of failure		—	●
Key lock		● Password setting	—
Low noise mode		●	●

## Specifications

Model name	UTY-DTGYZ1
Power supply	Single phase ~100 to 240 V 50/60 Hz
Dimensions (H × W × D) (mm)	260 × 246 × 54
Weight (g)	2,150
Interfaces	Transmission/LAN/USB/EXT IN/EXT OUT/Reset SW



## System Controller

UTY-APGXZ1 (Software)

Up to  
**4** VRF network systems  
Up to  
**400** outdoor units  
Up to  
**1,600** indoor units

System controller enables advanced integrated monitoring and control of VRF network systems operating in small to large buildings.

- Up to 1,600 indoor units and 400 outdoor units on up to 4 VRF network systems can be controlled.
- To accommodate facility management needs, the system controller offers—in addition to precise air conditioning control—remote central control, electricity charge apportionment, schedule management, and energy-saving options for VRF network systems.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



## System Controller Lite

UTY-ALGXZ1 (Software)

Up to  
**1** VRF network system  
Up to  
**100** outdoor units  
Up to  
**400** indoor units

System controller Lite offers a set of standard functions to manage air conditioners operating in a small or midsize building.


- Up to 400 indoor units and 100 outdoor units on a VRF network system can be controlled.
- In addition to precise air conditioning control, a variety of applications are available as options to offer a wider range of control.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



### Visually Intuitive Operation

**Click & Operate:** The visual representation of the property is shown on the screen from the perspective most suitable for operation (Click & Operate) You can select from among 4 display options: site, building, floor, and list.

**Freely define groups for batched control:** Indoor units can be grouped for simplified batch control from the tree menu. They can be grouped by organizational hierarchy, such as by division, department, and section.

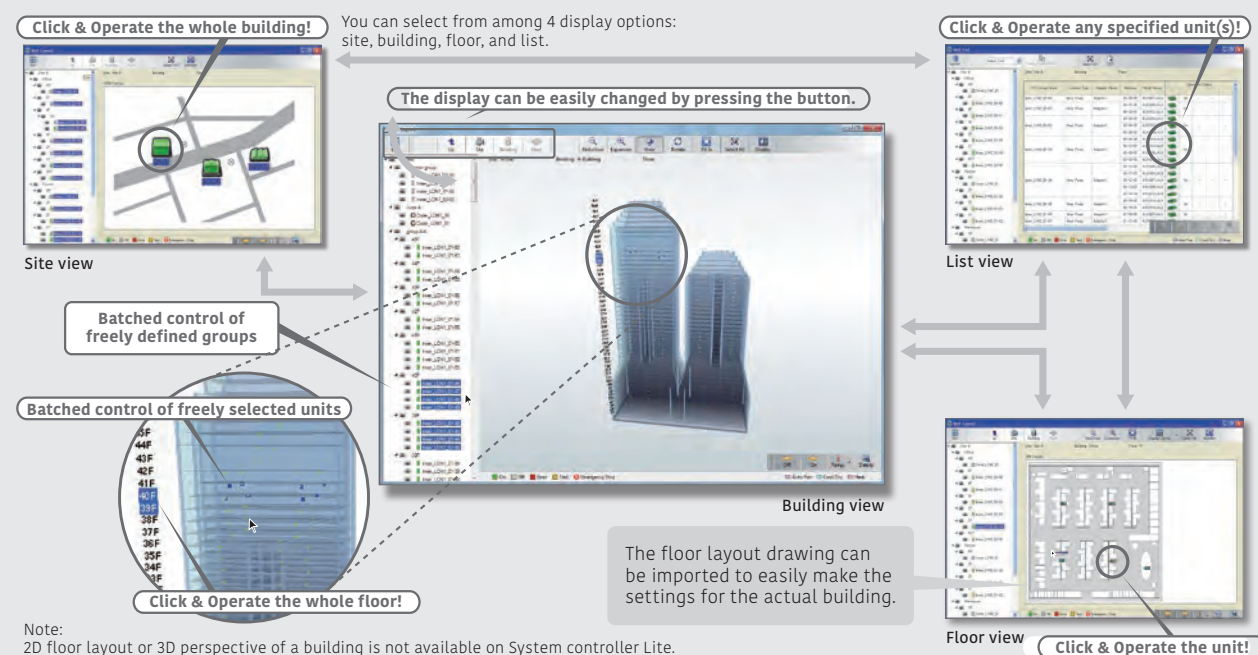


### Features:

### Third-Party Devices Connected via MODBUS® can be Controlled.

**Standard** for System Controller **Option** for System controller Lite UTY-PLGXX2

When a MODBUS® adapter (locally available) is connected to a computer, electrical equipment and devices supported by MODBUS® can be monitored and controlled centrally from the computer. The central control can reduce wasted energy throughout an entire building resulting from a failure to turn equipment off during or after work, as well as reduce the need for on-site patrols.

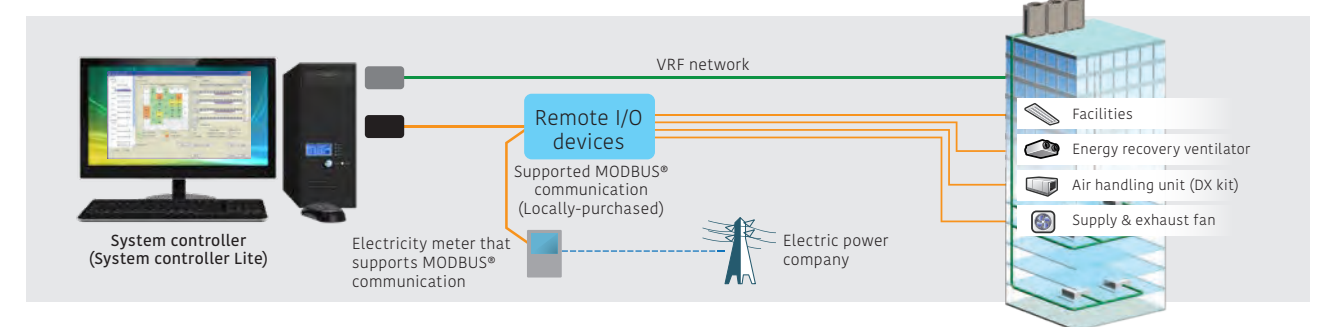


### Wide-Ranging Operation and Data Management

**Standard** System controller and System controller Lite

#### Schedule management

- An annual schedule can be arranged for each remote controller group or user-defined group.
- ON/OFF, operation mode, remote controller prohibition, and temperature settings can be programmed for up to 143 times per day at 10-minute intervals and for up to 101 configurations for each remote controller group.
- Settings can be programmed for a period that spans midnight.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.
- Low noise operation of outdoor units can be scheduled.

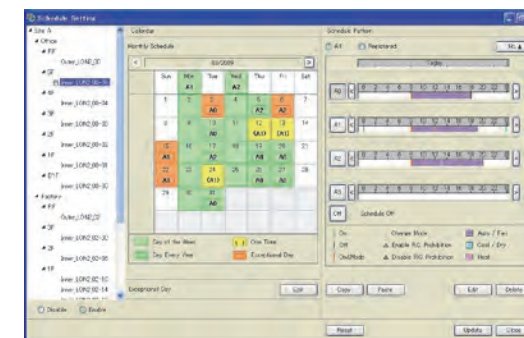

#### Wide-ranging control of indoor and outdoor units

- The operation status and mode of each indoor unit are displayed.
- Turn on and off each indoor unit and switch its operation mode.
- Setting temperature range limitation
- Low noise setting of outdoor units

#### Remote controller prohibition

Prohibits the operation mode, temperature setting, or ON/OFF of an indoor unit.

#### Error alert and e-mail notice

When something goes wrong, an error message is shown in a popup on a computer display with a chime, and an e-mail notice is sent. Errors of the past one year are logged and can be reviewed.

#### Operation and control history

A history of operation status and control can be maintained and retrieved.

#### Importing and exporting databases

Only an administrator is authorized to import and export registration, layout, and image data.

#### Automatic clock adjustment

Time can be set for all controllers in batch automatically.


### Electricity Charge Apportionment

**Standard** on System controller

**Option** System controller Lite UTY-PLGXA2

#### Electricity charge apportionment method

This is a method to calculate monthly energy costs to be allocated to each tenant based on the amount of energy used by their air conditioners. The first step is to determine exactly how much energy is consumed by air conditioners in each tenant space. The second step is to divide the total energy charge billed by an electric power company based on the amount of energy used by each tenant to determine the energy cost to be allocated to each of them. (See figure on right) The calculation takes into consideration such factors as the number of unused rooms and nighttime electricity rate, which are shown in detail on an energy cost allocation schedule.

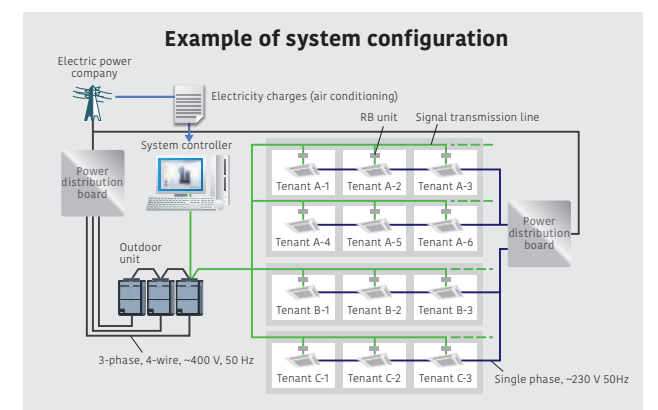






Features:

Remote Monitoring Management


- Standard on System controller
- Option System controller Lite UTY-PLGXR2

The System controller can be used on site or remotely over networks for remote central control. The System controller requires 2 software programs working together: The VRF controller runs on site and communicates with the VRF system; The VRF explorer, which runs at a remote location, provides a user interface and communicates with the VRF controller. The VRF controller and the VRF explorer run on a single computer or on different computers connected on a network. A computer running VRF explorer can centrally control up to 10 VRF system sites having up to 20 buildings each.

On site central control

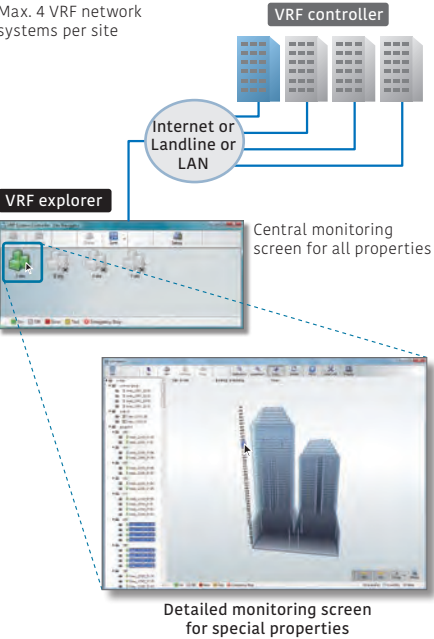

Remote central control

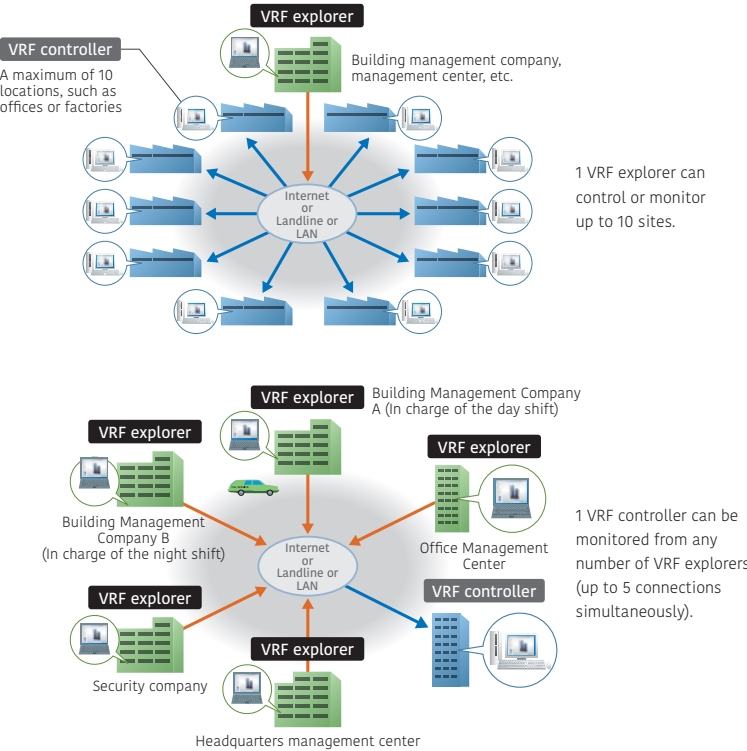

Energy-Saving Management

- Option System controller UTY-PEGXZ1
- Option System controller Lite UTY-PLGXE2

A variety of energy-saving options can be selected depending on the season, climate, and time of day. Excellent energy-saving operation is performed while keeping users comfortable.



Main screen for energy-saving management

Energy saving graph data: This chart compares the energy consumption for the current month with the previous month and with the same month of the previous year to keep track of the energy-saving performance.

Indoor unit rotation

Indoor units can be automatically rotated to operate within a group in accordance with a predetermined annual schedule to reduce power consumption while keeping users comfortable. The operation stoppage rate can be selected for an indoor unit.

Peak-cut mode

The system controller monitors the connected power meter and controls the energy to maintain the target power consumption set for each time period by changing the set temperature of the indoor units or turning off the thermostat so as to keep the users comfortable. Indoor units to be controlled can be grouped in many ways, and the control level can be set for each group.

Capacity saving for outdoor unit

The upper limit on the capacity of an outdoor unit can be adjusted to reduce power consumption during a hot summer or cold winter by averaging out the power-saving performance of each refrigerant system. The upper limit on capacity can be set at 50% of the rated capacity or more.

Summary of functions

Functions	Type	System controller		System controller Lite				
		UTY-APGXZ1	Option UTY-PEGXZ1	UTY-ALGXZ1	Option UTY-PLGXR2	Option UTY-PLGXA2	Option UTY-PLGXE2	Option UTY-PLGXX2
Specifications	Max. number of VRF networks supported	4	—	1	—	—	—	—
	Max. number of indoor unit and remote controller groups per VRF network	400	—	400	—	—	—	—
	Max. number of outdoor units per VRF network	100	—	100	—	—	—	—
	Max. number of indoor units and remote controller groups per System controller	1600	—	400	—	—	—	—
	Max. number of outdoor units per System controller	400	—	100	—	—	—	—
Site supervision	Multiple site display	10	—	10	—	—	—	—
	Number of buildings per site	20	—	—	—	—	—	—
	Number of floors per site	200	—	—	—	—	—	—
	Number of floors per building	50	—	—	—	—	—	—
	3D graphical layout view	●	—	—	—	—	—	—
	2D graphical layout view	●	—	—	—	—	—	—
	List display	●	—	●	—	—	—	—
	Tree display	●	—	●	—	—	—	—
Error management	Error notification	●	—	●	—	—	—	—
	Audible alarm	●	—	●	—	—	—	—
	E-mail notification of errors	●	—	●	—	—	—	—
History	Error history	●	—	●	—	—	—	—
	Operation history	●	—	●	—	—	—	—
Operation control	Individual control	ON/OFF	—	●	—	—	—	—
		Operation mode*	—	●	—	—	—	—
		Room temperature	—	●	—	—	—	—
		Fan speed	—	●	—	—	—	—
		Airflow direction	—	●	—	—	—	—
		Economy mode	—	●	—	—	—	—
		Setting temperature range limitation	—	●	—	—	—	—
	Individual management	Anti-freeze	—	●	—	—	—	—
		Low noise setting of outdoor units	—	●	—	—	—	—
		Remote controller prohibition	—	●	—	—	—	—
	Other	Setting temperature range limitation	—	●	—	—	—	—
		Filter sign reset	—	●	—	—	—	—
	Schedule	memory operations	—	●	—	—	—	—
		Pattern operations	—	●	—	—	—	—
Remote monitoring management	Annual Schedule	●	—	●	—	—	—	—
	Setting for a specific date	—	—	—	—	—	—	—
	ON/OFF per day	72	—	72	—	—	—	—
	ON/OFF per week	504	—	504	—	—	—	—
	Day off	●	—	●	—	—	—	—
	Minimum unit of timer setting (minutes)	10	—	10	—	—	—	—
	Weekly schedule for low noise mode	—	—	—	—	—	—	—
Electricity charge apportionment	Web Operation	●	—	●	—	—	—	—
	Remote monitoring	—	—	—	●	—	—	—
	Remote operation control	—	—	—	●	—	—	—
	Remote function setting	—	—	—	●	—	—	—
	Apportionment charge/bill calculation	—	—	—	—	●	—	—
Energy-saving management	Tenant (block) setting	—	—	—	—	●	—	—
	Common facilities apportionment setting	—	—	—	—	●	—	—
	Rated power consumption allotment	—	—	—	—	●	—	—
	Individual calculations for cooling and heating	—	—	—	—	●	—	—
	Electricity meter supported	—	●	—	—	●	—	—
Control of external devices	Indoor unit lead lag	—	—	—	—	—	●	—
	Peak cut control	—	—	—	—	—	●	—
	Capacity saving for outdoor unit	—	—	—	—	—	●	—
	Record of energy-saving operation	—	—	—	—	—	●	—
	Information on energy saving	—	—	—	—	—	●	—
Others	Power consumption monitor	—	—	—	—	—	●	—
	Electricity meter supported	—	●	—	—	—	●	—
	Monitor	●	—	—	—	—	—	●
	Control	●	—	—	—	—	—	●
	Importing and exporting databases	—	—	—	—	—	—	—
Others	Automatic clock adjustment	—	—	—	—	—	—	—
	Multiple language support	7 languages	—	7 languages	—	—	—	—
	Refrigerant leak detection	—	—	—	—	—	—	—
	Power shutdown	●	—	●	—	—	—	—

●: Available - : Not available

Computer requirements

The specifications required for the computer are shown in the table below:

	System controller	System controller Lite
Operating system	• Microsoft Windows 10 Home (64-bit) • Microsoft Windows 10 Pro (64-bit) • Microsoft Windows 11 Home (64-bit) • Microsoft Windows 11 Pro (64-bit)	Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel Core i3 2 GHz or higher	
Memory	• 4 GB or more (for Windows 10) • 8 GB or more (for Windows 11)	
HDD	40 GB or more of free space	
Displayed items	1,024 × 768 or higher resolution	
Interfaces	• Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line) • USB ports (Maximum of 5 ports) (Required only for the server PC that works as VRF controller) – Maximum of 1 USB ports are required for WHITE-USB-KEY connection – Maximum of 4 USB ports are required for Echelon U10 USB/U60-FT DIN Network Interface NOTE: Maximum number of required USB ports depends on the applicable system configuration.	• Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line) • USB ports (Maximum of 2 ports) (Required only for the server PC that works as VRF controller) – 1 USB port is required for WHITE-USB-KEY connection – 1 USB port is required for Echelon U10 USB/U60-FT DIN Network Interface NOTE: Maximum number of required USB ports depends on the applicable system configuration.
Graphic accelerator	Microsoft DirectX 9.0c compatible	
Software	Adobe Reader 9.0 or later	

- Transmission adapter (Required for each VRF network):
  - Echelon U10 USB Network Interface - TP/FT-10 Channel (Model number: 75010R)
  - Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

Packing list

Type	For System controller		For System controller Lite			
	System controller	Option Energy manager	System controller Lite	Remote access	Option Electricity charge apportionment	Option Energy saving Centralized control
Model name	UTY-APGXZ1	UTY-PEGXZ1	UTY-ALGXZ1	UTY-PLGXR2	UTY-PLGXA2	UTY-PLGXE2 UTY-PLGXX2
White-USB-key	1	1	1	1	1	1

\*1: Software protection key to be inserted in a USB slot running System controller or System controller Lite. System controller or System controller Lite may only run on a PC with a WHITE-USB-KEY. However, a WHITE-USB-KEY is not required for remote VRF explorer software.

# MODBUS® Converter for indoor unit


UTY-VMSX



Up to  
1 indoor unit


## MODBUS® Converter Enables Air Conditioners to be Fully Integrated into a MODBUS® Network.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS® converter must be connected to an indoor unit on a one-to-one basis.
- The MODBUS® converter enables central monitoring and control of air conditioners from BMS, central, or home controller.

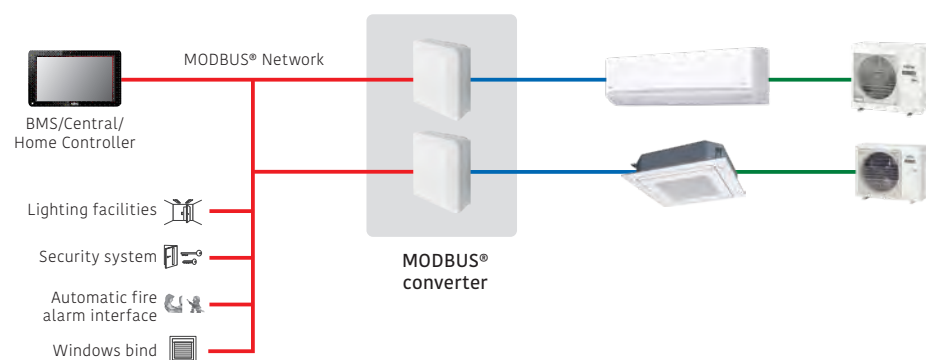

## Easy Installation

Easy to install with minimal wiring and without the need for a power supply cable to the converter

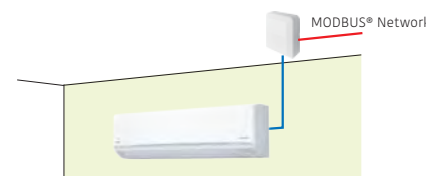

## Basic Control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Room temperature setting and display
- Economy mode setting
- Error status

## Specifications

Model name	UTY-VMSX
Power supply	12 V DC
Input power (W)	Max. 1.2 W
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200
Maximum number of connectable indoor units per MODBUS® converter	1

## Modbus communication specifications

Transfer mode	RTU mode
Communication speed	9600/19200 bps
Data bit	8
Parity	even/odd/none
Stop bit	1/2 (no parity)
Network	RS485
Maximum cable length	1000 m (3280 ft)

# MODBUS® Interface

FG-RC-MBS1Z1 / FG-AC-MBS1Z1 / FG-IR-BMG1Z1



**Intesis®**  
BY HBS NETWORKS



FG-RC-MBS1Z1  
(3-wire RC-line type)

**Intesis®**  
BY HBS NETWORKS



FG-AC-MBS1Z1  
(CN connector type)

**Intesis®**  
BY HBS NETWORKS




FG-IR-BMG1Z1  
(IR type)

Up to  
1 indoor unit


## MODBUS® Interface Enables Air Conditioners to be Fully Integrated into a MODBUS® Network.

- Small, compact, and easy to install on DIN rails.
- No separate external power supply required.
- MODBUS® interface enables central monitoring and control of air conditioners from BMS.

## Installation Example

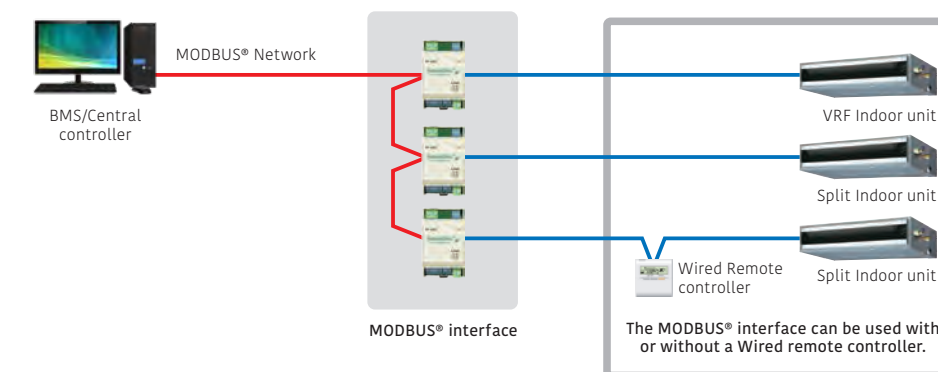

## [IR type] Connection to wall-mounted type

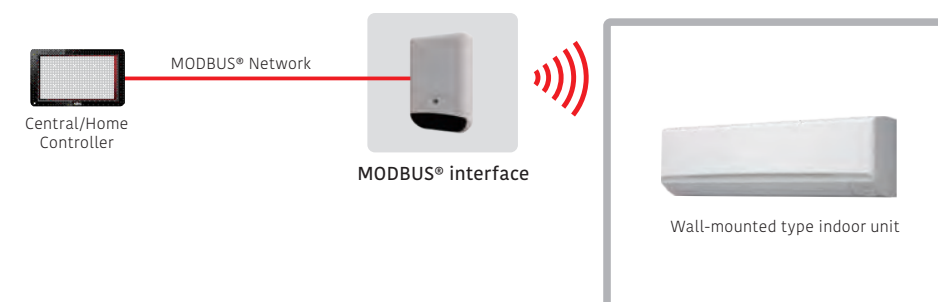


## Specifications

Model name	FG-RC-MBS1Z1 (3-wire RC-line type)	FG-AC-MBS1Z1 (CN connector type)	FG-IR-BMG1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58	93 × 60 × 21
Weight (g)	85	85	55

# MODBUS® Convertor for VRF

UTY-VMGX / FG-TL-BMKM16Z1



UTY-VMGX

Up to  
9 units per VRF system  
Up to  
100 outdoor units  
Up to  
128 indoor units

## MODBUS® Converter Enables Air Conditioners to be Fully Integrated into a MODBUS® Network.



- Compact and lightweight design
- Direct connection to MODBUS® network
- MODBUS® convertor enables central monitoring and control of air conditioners from BMS or a central controller.
- Up to 9 converters can be connected to a VRF network (UTY-VMGX). Simultaneous control, such as Power ON/OFF and temperature setting, can be performed for each zone.
- If a connection error occurs after installation work is completed, the source of the error can be located easily.

## Installation Example



FG-TL-BMKM16Z1

Up to  
16 indoor units  
Up to  
16 outdoor units  
Up to  
128 indoor units

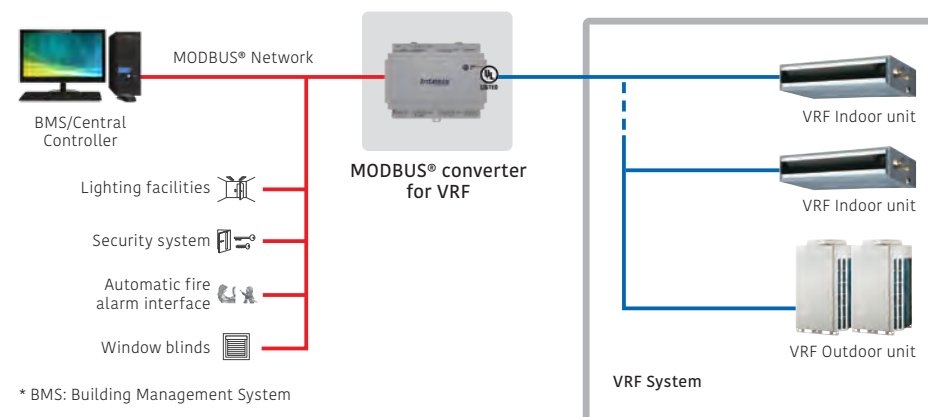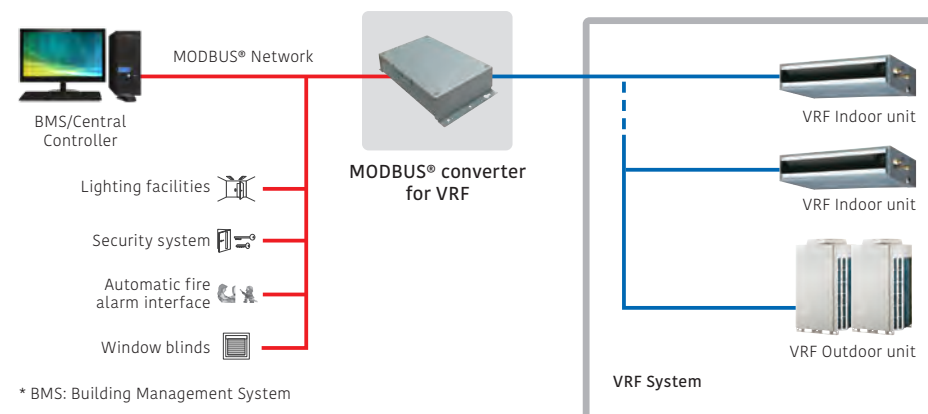

## Specifications

Model name	UTY-VMGX	FG-TL-BMKM16Z1
Power supply	Single phase ~220 to 240 V 50/60 Hz	12 to 36 VDC, Max: 250 mA or 24 VAC 50-60 Hz, Max: 127 mA*
Dimensions (H × W × D) (mm)	54 × 260 × 150	90 × 106 × 58
Weight (g)	1,100	375

\*24 V DC power supply is recommended.

# BACnet® Interface

FG-AC-BAC1Z1 / FG-IR-BMG1Z1



Intesis®  
BY HBS NETWORKS



FG-AC-BAC1Z1  
(CN connector type)

Intesis®  
BY HBS NETWORKS




FG-IR-BMG1Z1  
(IR type)


Up to  
1 indoor unit

- BACnet® interface connects BMS and a Fujitsu General split/multi-split/VRF system.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

## Installation Example

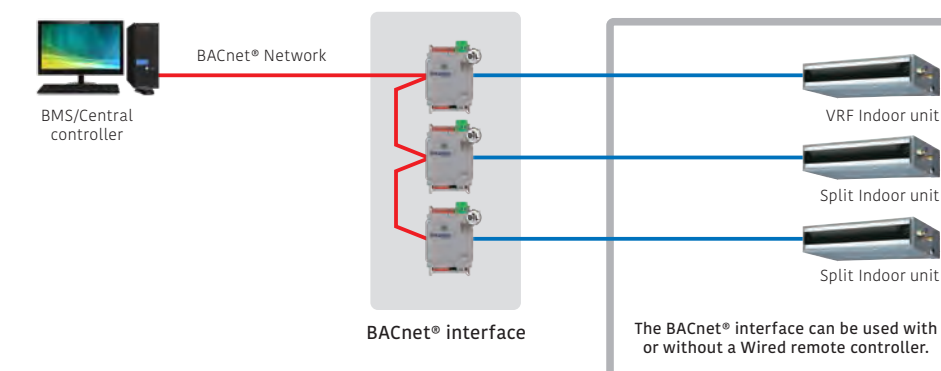

## [IR type] Connection to wall-mounted type

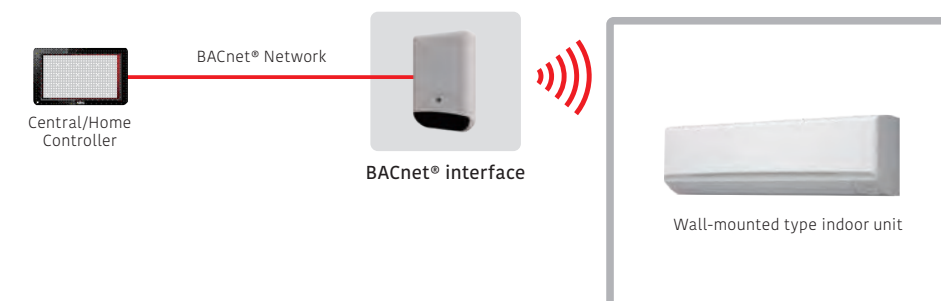

## Specifications

Model name	FG-AC-BAC1Z1 (CN connector type)	FG-IR-BMG1Z1 (IR type)
Number of controllable groups	1	1
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 60 × 21
Weight (g)	85	55

12 V DC supplied by an indoor unit



# BACnet® Gateway

UTY-ABGXZ1 **Software**




White-USB-key  
(Software Protection Key)



BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

Up to  
**4** VRF network systems  
Up to  
**400** outdoor units  
Up to  
**1,600** indoor units

## Installation Example

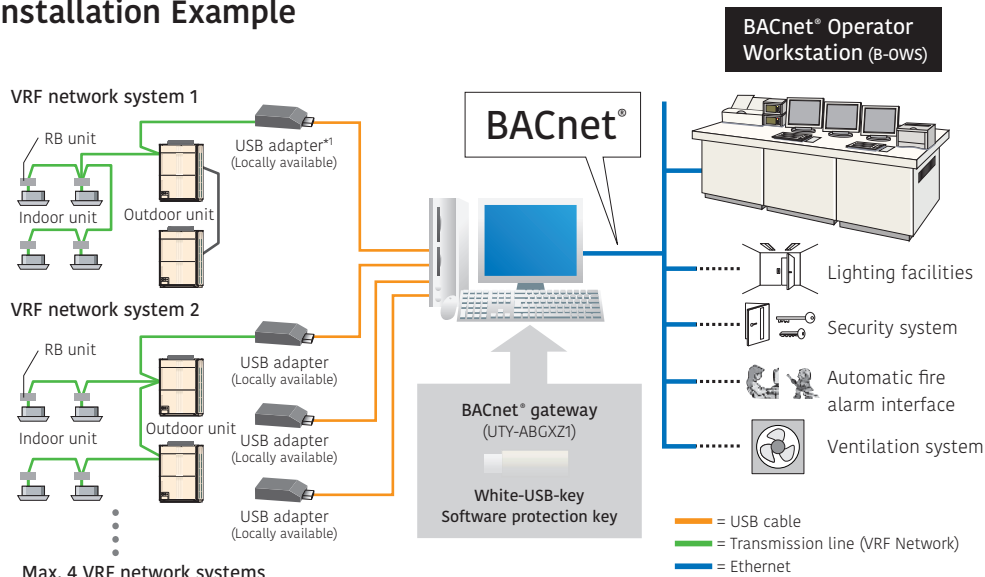

\*1: U10 USB network interface available from Echelon® Corporation.

## Computer requirements

	UTY-ABGXZ1
Operating system	<ul style="list-style-type: none"><li>• Microsoft Windows 10 Home (64-bit)</li><li>• Microsoft Windows 10 Pro (64-bit)</li><li>• Microsoft Windows 11 Home (64-bit)</li><li>• Microsoft Windows 11 Pro (64-bit)</li></ul> Supported languages: English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel Core i3 2 GHz or higher
Memory	<ul style="list-style-type: none"><li>• 4 GB or more (for Windows 10)</li><li>• 8 GB or more (for Windows 11)</li></ul>
HDD	40 GB or more of free space
Displayed items	1,024 × 768 or higher resolution
Interfaces	<ul style="list-style-type: none"><li>• Ethernet port (for getting access to the Internet using LAN) or Modem (for getting access to the Internet using public telephone line)</li><li>• USB ports (Maximum of 5 ports) (Required only for the server PC that works as VRF controller)<ul style="list-style-type: none"><li>– Maximum of 1 USB ports are required for WHITE-USB-KEY connection</li><li>– Maximum of 4 USB ports are required for Echelon U10 USB/U60-FT DIN Network Interface</li></ul></li></ul> NOTE: Maximum number of required USB ports depends on the applicable system configuration.
Software	Adobe Reader 9.0 or later

•Transmission adapter (Required for each VRF network):  
– Echelon U10 USB Network Interface – TP/FT-10 Channel (Model number: 75010R)  
– Echelon U60-FT DIN Network Interface (Model number: 75060R-40)

## Packing list

Name and shape	Quantity	Application
White-USB-key (Software protection key with software)	1	Includes the software and manuals of tool for BACnet Gateway. Additionally, it works as the software protection key. Software protection key to be connected to an USB port on the PC that the BACnet Gateway is installed. BACnet Gateway runs only on a PC with this WHITE-USB-KEY.

# BACnet® Gateway


UTY-VBGX **Hardware**



BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

Up to  
**1** VRF network system  
Up to  
**32** refrigerant systems  
Up to  
**128** indoor units

## Installation Example

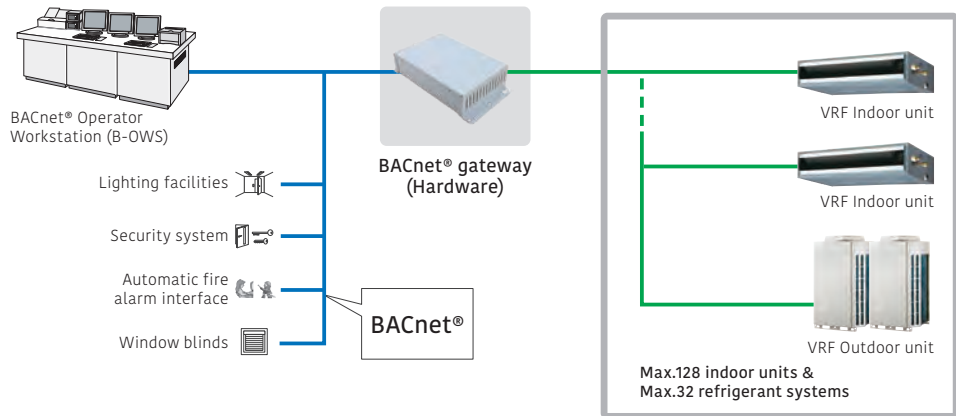

## Specifications

Model name	UTY-VBGX
Number of controllable indoor units	128
Number of controllable refrigerant systems	32
Number of controllable VRF networks	1
Number of connectable units / one VRF network	4
Power supply	Single phase, 100-240 V, 50/60 Hz
Power consumption (W)	4.6 (max.)
Dimensions (H × W × D) (mm)	59.6 × 270.4 × 176
Weight (g)	1200

# BACnet®/MODBUS® Router

FG-RTR-BAC32Z1 / FG-RTR-MBS32Z1



**Intesis®**  
BY HMS NETWORKS



FG-RTR-BAC32Z1  
(BACnet)

**Intesis®**  
BY HMS NETWORKS




FG-RTR-MBS32Z1  
(MODBUS®)

## Routing Between BACnet® MS/TP and BACnet® IP Networks


- Routing between BACnet® MS/TP and BACnet® IP networks
- Routing between MODBUS® RTU and MODBUS® TCP networks

## Installation Example

[BACnet® type]

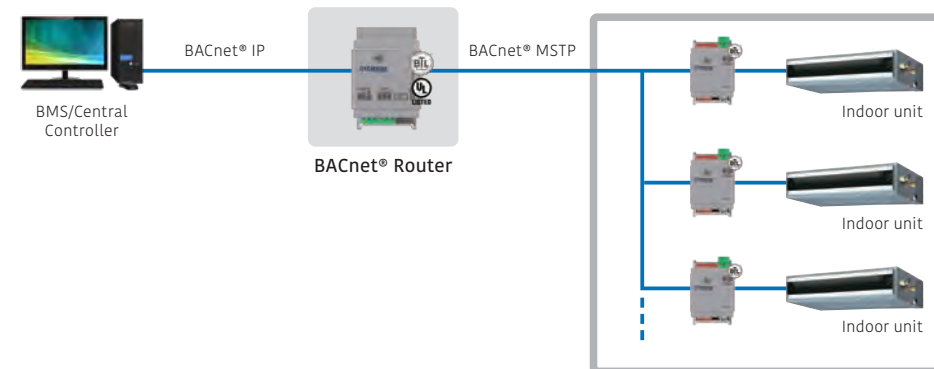

[MODBUS® type]

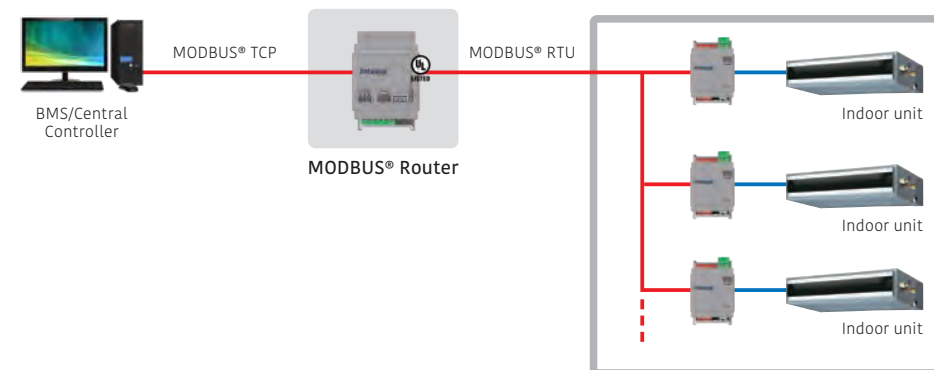

## Specifications

Model name	FG-RTR-BAC32Z1 (MS/TP to IP)	FG-RTR-MBS32Z1 (RTU to TCP)
Number of routable devices (max.)	32	32
Power supply	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA
Power consumption (W)	1.7	1.7
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58
Weight (g)	150	150

# BACnet®/MODBUS® Cloud Device

FG-CLD-BMG4Z1 / FG-CLD-BMG8Z1 / FG-CLD-BMG16Z1 / FG-CLD-BMG32Z1




**Intesis®**  
BY HMS NETWORKS



FG-CLD-BMG4Z1/8Z1/16Z1/32Z1

- The most powerful configuration tool common to all BACnet® gateways provides the system integrators with the power to configure and monitor their systems in an easy and reliable manner.
- A simple, easy-to-use description for the ST Cloud Web and App User Interface, with all widgets customizable to the user's needs, enabling system integrators to easily offer the best user experience to customers who are in control of their BACnet® or MODBUS® devices.

## Installation example

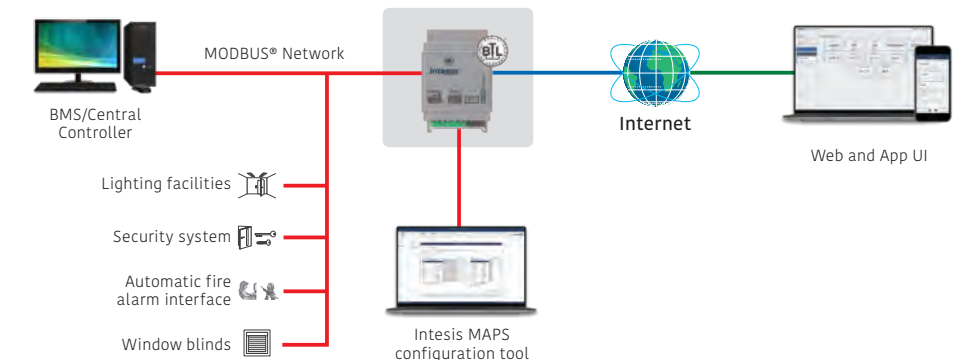

\*BMS: Building Management System

## Gateway Features

- BACnet® IP/MSTP or MODBUS® TCP/RTU connectivity
- Up to 32 devices can be connected to each gateway.
- Up to 12 widgets per device
- Easy device configuration with Intesis MAPS

## Next-Generation Services

- Industrial-grade connectivity now for building automation
- Fast and scalable real-time edge connectivity over HMS HubTM
- Full data control and protection
- Secure and remote updates during the application lifetime

## System Features

- Monitor and control all devices in an intuitive way
- Comes with a native iOS and Android app and a web interface
- Create scenes and interact with multiple concurrent devices
- Calendar that shows the daily planned installation commands
- Notifications keep you updated about system status
- Device sharing and usage permissions management
- Multiple site management from a common dashboard

## Specifications

Model name	FG-CLD-BMG4Z1	FG-CLD-BMG8Z1	FG-CLD-BMG16Z1	FG-CLD-BMG32Z1
Number of connectable BACnet® (IP/MSTP) or MODBUS® (TCP/RTU) devices	4	8	16	32
Power supply	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz
Power consumption (W)	1.7	1.7	1.7	1.7
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58	93 × 53 × 58	93 × 53 × 58
Weight (g)	150	150	150	150

# KNX® Converter for indoor unit

UTY-VKSX




Up to  
1 indoor unit

## KNX® converter Enables Individual Control of an Indoor Unit.


- The KNX® converter connects a central or home controller and a Fujitsu General indoor unit.
- Compact and lightweight design

### Installation example

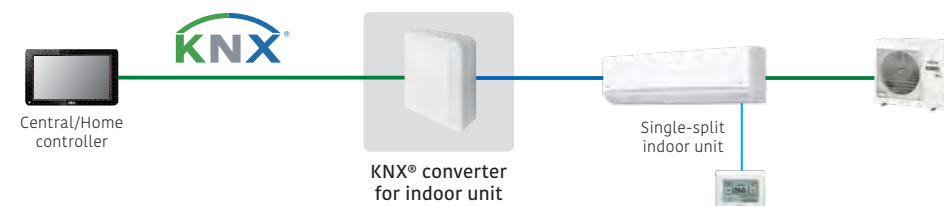

# KNX® Converter for VRF

UTY-VKGX / FG-TL-BMKM16Z1



UTY-VKGX

Up to  
100 outdoor units  
Up to  
128 indoor units




FG-TL-BMKM16Z1

Up to  
16 outdoor units  
Up to  
16 indoor units

## KNX® converter Enables Centralized Control of a System.

- KNX® converter connects a central or home controller and a Fujitsu General VRF system.
- Up to 128 indoor units and 100 outdoor units can be connected to a single KNX® converter. (UTY-VKGX)

### Installation Example

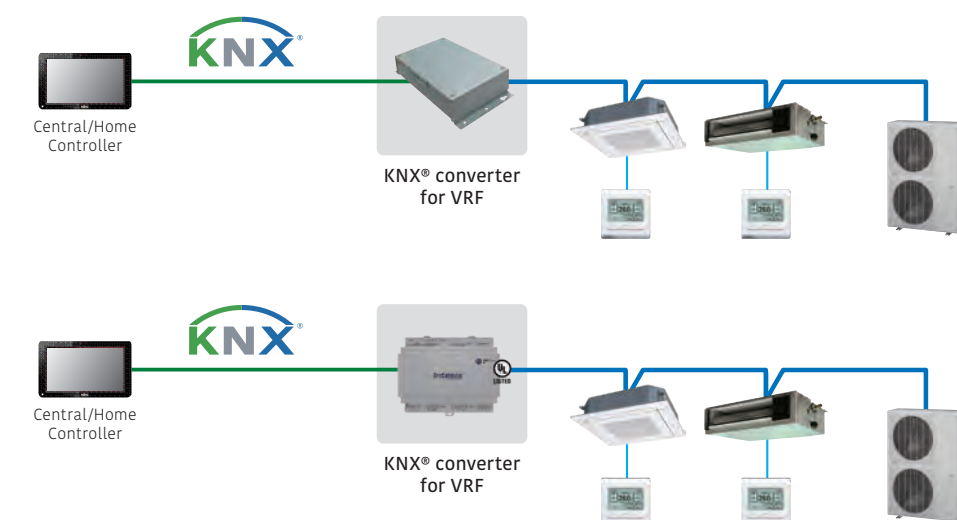

### Specifications

Model name	UTY-VKSX	UTY-VKGX	FG-TL-BMKM16Z1
Power supply	12 V DC	Single phase ~220 to 240 V 50/60 Hz	12 to 36 VDC, Max: 250 mA or 24 VAC 50-60 Hz, Max: 127 mA*
Dimensions (H × W × D) (mm)	140 × 117 × 43	54 × 260 × 150	90 × 106 × 58
Weight (g)	215	1,200	375

\*24 V DC power supply is recommended.

# KNX® Interface

FG-RC-KNX1Z1 / FG-AC-KNX1Z1 / FG-IR-KNX1Z1



## Intesis®



FG-RC-KNX1Z1  
(3-wire RC-line type)

## Intesis®



FG-AC-KNX1Z1  
(CN connector type)

## Intesis®



FG-IR-KNX1Z1  
(IR type)


Up to  
1 indoor unit

## The KNX® Interface Enables Air Conditioners to be Fully Integrated into a KNX® Network System.


- Simple installation due to small and compact size.
- No separate external power supply required (only KNX® bus power required)

### Installation Example


[3-wire RC-line type/CN connector type]

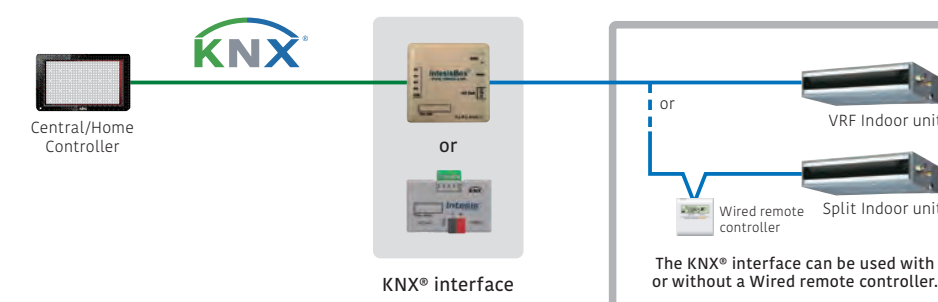

[IR type] Connection to wall-mounted type

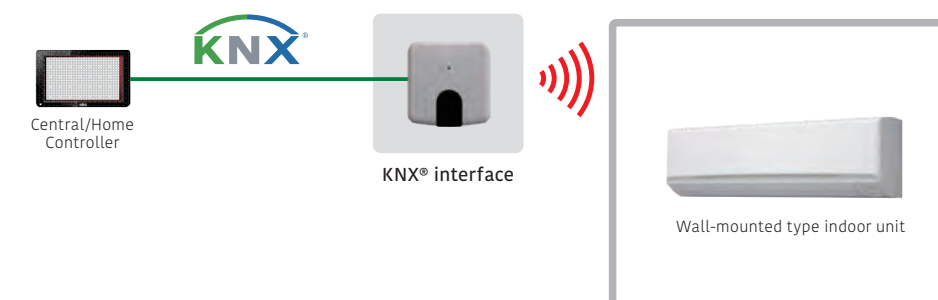

[IR type] Connection to a product other than wall-mounted type

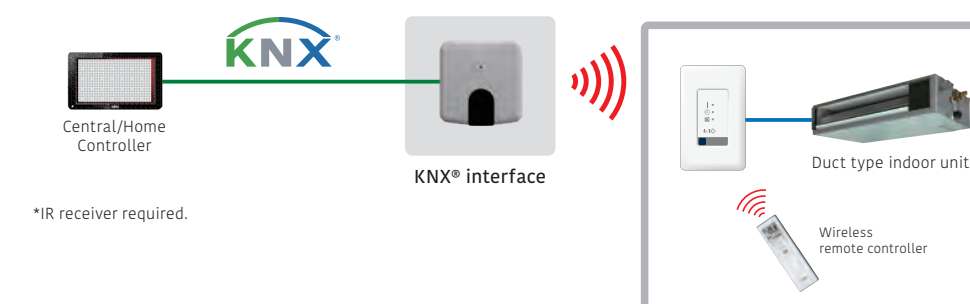

\*IR receiver required.

### Specifications

Model name	FG-RC-KNX1Z1 (3-wire RC-line type)	FG-AC-KNX1Z1 (CN connector type)	FG-IR-KNX1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	70 × 70 × 28	45 × 59 × 21	81 × 78 × 28
Weight (g)	70	35	76




# Network Converter for single-split type

UTY-VTGX / UTY-VTGXV



UTY-VTGX  
DC power supply type




UTY-VTGXV  
AC power supply type

Up to  
**16** single indoor units  
Up to  
**1** group  
Up to  
**100** Network Converters


- A network converter is required when connecting a single-split system to a VRF network system.
- Compact and lightweight design
- Connectable to both nonpolar 2-core and polar 3-core remote controllers

## Installation Example


- A 1-remote-controller type and a 2-remote-controller type are available.
- Power supply (220 to 240 V AC, 50/60 Hz) is required for the 2-remote-controllers type.

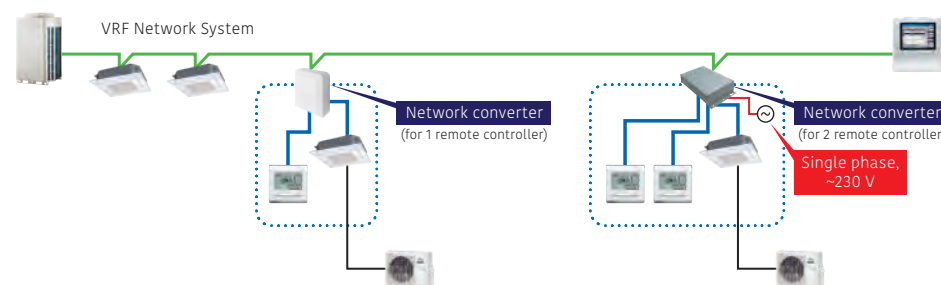

- Both nonpolar 2-core and polar 3-core type Wired remote controllers can be connected.

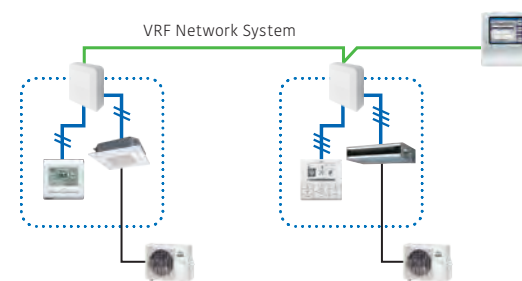

- Central control can be provided for single-split systems. (Up to 100 network converters can be connected in a VRF network system)

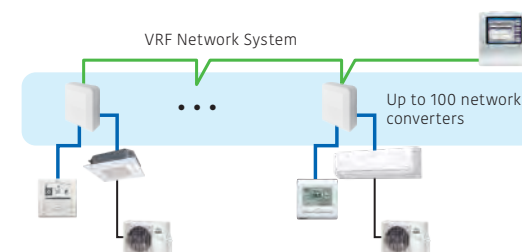


## Specifications

Model name	UTY-VTGX		UTY-VTGXV
Power supply	Polar 3-core 12 V DC	Nonpolar 2-core DC 12 V	Single phase ~220 to 240 V 50/60 Hz
Input power (W)	Max. 1.2 W		Max. 3
Dimensions (H × W × D) (mm)	140 × 117 × 43		54 × 260 × 150
Weight (g)	250		1,100

# Network Converter for LONWORKS™


UTY-VLGX



Up to  
**4** units to BMS  
Up to  
**100** outdoor units  
Up to  
**128** indoor units

- Connects the VRF network system to a LONWORKS™ open network to manage small and mid-sized BMS and VRF network system.
- The UTY-VLGX enables centralized monitoring and control of VRF network system from a BMS via a LONWORKS™ interface.
- Up to 128 Indoor units can be connected to one network converter for LONWORKS™

## Installation Example

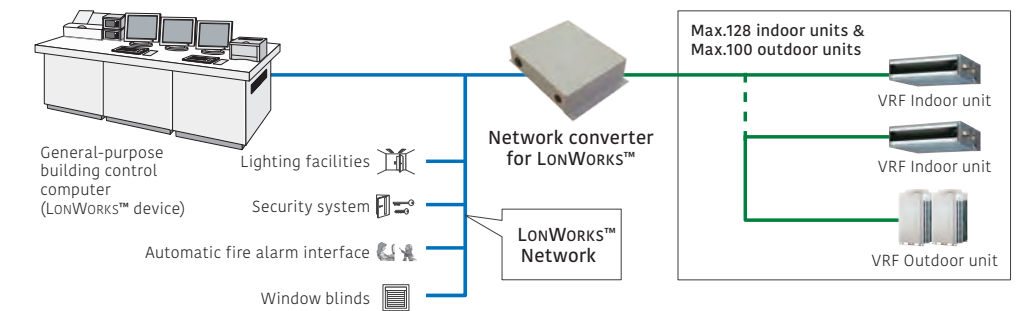

## Specifications

Model name	UTY-VLGX
Power supply	Single phase ~208 to 240 V 50/60 Hz
Power consumption (W)	4.5
Dimensions (H × W × D) (mm)	67 × 288 × 211
Weight (g)	1,500

## Transmission specifications (BMS side)

Transmission speed	78 kbps
Transceiver	FT-X1 (available from Echelon® Corporation)
Transmission line form	Free topology
Terminal resistor	None (converter to be attached at the terminal of a network)

## External Switch Controller

UTY-TERX




Up to  
**1** group

### Air Conditioner Switching can be Controlled by Connecting This External Switch Controller to Other Sensor Switches.

- In combination with a commercially available card-key switch or other sensors, this External switch controller enables the control of ON/OFF, room temperature, and fan speed of connected air conditioners as well as master control functions. This makes this product an ideal choice for use in hotel rooms.
- Card key or other sensor switches are locally available.
- The set temperature can be specified at two points each for cooling and heating operations (4 points in total).

### Installation Example


Occupancy sensor monitors the movement of a person in a room. When it detects that the person has left the room, it switches the air conditioner to low-capacity mode. When a person returns to the room, the air conditioner returns to the previous operation mode.

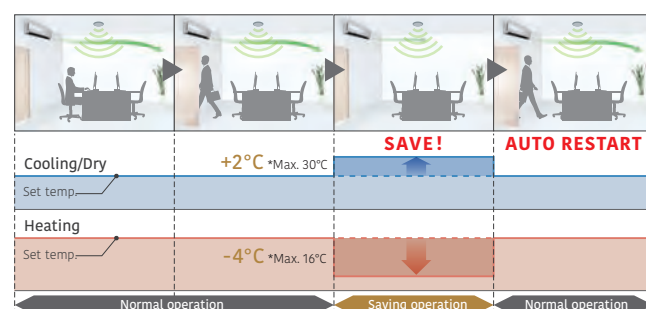

Occupancy sensor equipment needs to be purchased separately. Occupancy sensor is not mounted on an External switch controller.


## Signal Amplifier

UTY-VSGXZ1



- The transmission line can be extended up to 3,600 m using multiple Signal amplifiers.
- Up to 8 Signal amplifiers can be added in a VRF network system.
- A Signal amplifier is required.
  - (1) When the total wiring length of the transmission line exceeds 500 m.
  - (2) When the total number of units on the transmission line exceeds 64.

### Installation Example

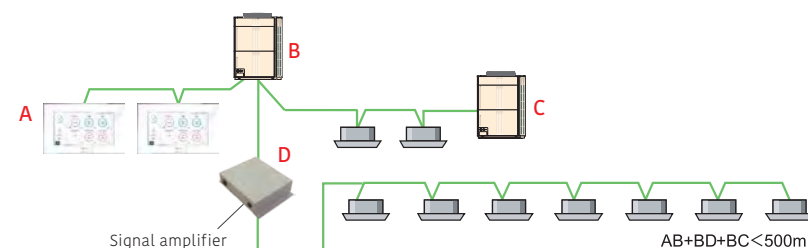

### Specifications

Model name	UTY-VSGXZ1	UTY-TERX
Power supply	Single phase ~208 to 240 V 50/60 Hz	6.5 to 16 V DC
Power consumption (W)	4.5	-
Dimensions (H × W × D) (mm)	67 × 288 × 211	140 × 117 × 43
Weight (g)	1,500	250














12 V DC supplied by an indoor unit



Controller System List (available) for Split/Multi-Split

Controller Options/Accessories:



Type	Refrigerant	Indoor unit					Indoor unit				
		Wall-mounted					Wall-mounted			Cassette	
		Designer Range		Standard Range			Standard Range	ECO Range		Compact 4-way flow Range	Circular flow Range
		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEH07/09/12/14 KJCAL, KJCALB, ASYH07/09/12/14 KJCA, KJCA-B	ASEG07/09/12/14 KETF, KETF-B, ASYG07/09/12/14 KETE, KETE-B	ASEH07/09/12/14KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG18/24KMTE	ASEH30/36KMTB	ASEH07/09/12KNCA	ASEG07/09/12KPCE	ASEH07/09/12KLTA	AUXG 09/12/14/18/22/24 KVL A AUXG 18/22/24/30/36/45/54 KRLB
											
Controllers	Wired remote controller		● UTY-RVRY+ UTY-TWRXZ2				● UTY-RVRY+ UTY-TWRXZ2				● UTY-RVRY
			● UTY-RNRYZ5+ UTY-TWRXZ2				● UTY-RNRYZ5+ UTY-TWRXZ2				● UTY-RNRYZ5
			● UTY-RLRY+ UTY-TWRXZ2				● UTY-RLRY+ UTY-TWRXZ2				● UTY-RLRY
			● UTY-RCRYZ1+ UTY-TWRXZ2				● UTY-RCRYZ1+ UTY-TWRXZ2				● UTY-RCRYZ1
											● UTY-RVNYM
											● UTY-RNNYM
	Simple remote controller	 Nonpolar 2-core type	● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2				● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2				● UTY-RSRY UTY-RHRY
	Home central remote controller										
	Wireless remote controller		● UTY-LNWX			● UTY-LNWX	● UTY-LNWX				● UTY-LNTY
	IR receiver unit with Wireless remote controller	 For Duct type									
		 For Duct type   For Cassette type   For Ceiling type									● UTY-LBTYC














\*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed.   \*2 Available only when the WLAN adapter (UTY-TFSXJ3) is removed.  
\*3 Consult your dealer for conditions of use.



# Controller System List (available) for Split/Multi-Split

Controller Options/Accessories:

























Type	Refrigerant	Indoor unit							Indoor unit								Outdoor unit
		Duct							Floor	Ceiling	Multi-split						Single phase
		Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure		BIG			Wall-mounted			Compact cassette	Mini duct	Slim duct	5/6-unit multi-split
		ARXG 09/12/14/18 KLLAP	ARXH 12/14/18/22/24/ 30/36/45/54 KMTAP	ARXG 12/14/18/22/24/ 30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB			AGEG 09/12/14 KVCA	ABEG 18/22/24/30/ 36/45/54 KRTA	ASEH05 KJCAL,KJCALB ASYH05 KJCA,KJCA-B	ASEH05KNCA	ASEG22KMTE	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP	AOEG36KBTAS
							ARYG60LHTA	ARYG72/90LHTA									AOYG45LBLA6
Controllers	Wired remote controller		● UTY-RVRY					● UTY-RVRY		● UTY-RVRY+ UTY-TWRXZ3	● UTY-RVRY	● UTY-RVRY+ UTY-TWRXZ2		● UTY-RVRY+ UTY-TWRXZ2	● UTY-RVRY		
			● UTY-RNRYZ5					● UTY-RNRYZ5		● UTY-RNRYZ5+ UTY-TWRXZ3	● UTY-RNRYZ5	● UTY-RNRYZ5+ UTY-TWRXZ2		● UTY-RNRYZ5+ UTY-TWRXZ2	● UTY-RNRYZ5		
			● UTY-RLRY					● UTY-RLRY		● UTY-RLRY+ UTY-TWRXZ3	● UTY-RLRY	● UTY-RLRY+ UTY-TWRXZ2		● UTY-RLRY+ UTY-TWRXZ2	● UTY-RLRY		
			● UTY-RCRYZ1					● UTY-RCRYZ1		● UTY-RCRYZ1+ UTY-TWRXZ3	● UTY-RCRYZ1	● UTY-RCRYZ1+ UTY-TWRXZ2		● UTY-RCRYZ1+ UTY-TWRXZ2	● UTY-RCRYZ1		
			● UTY-RVNYM		● UTY-RVNYM			● UTY-RVNYM							● UTY-RVNYM		
			● UTY-RNNYM		● UTY-RNNYM			● UTY-RNNYM							● UTY-RNNYM		
Simple remote controller	 Nonpolar 2-core type	● UTY-RSRY UTY-RHRY					● UTY-RSRY UTY-RHRY		● UTY-RSRY UTY-RHRY+ UTY-TWRXZ3	● UTY-RSRY UTY-RHRY	● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2		● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2	● UTY-RSRY UTY-RHRY			
Home central remote controller																	● UTY-DMMYM1*5 (KBTAS) UTY-DMMYM*3 (LBLA6)
Wireless remote controller												● UTY-LNWX		● UTY-LNTY			
IR receiver unit with Wireless remote controller	 For Duct type						● UTY-LRHYM										
	 For Duct type   For Cassette type   For Ceiling type	● UTY-LBTYM					● UTY-LBTYM		● UTY-LBTYH						● UTY-LBTYM		

\*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed. \*2 Available only when the WLAN adapter (UTY-TFSXJ3) is removed.  
\*3 Consult your dealer for conditions of use.

# Controller System List (available) for Split/Multi-Split

Controller Options/Accessories:



Type	Refrigerant	Indoor unit					Indoor unit						
		Wall-mounted					Wall-mounted			Cassette			
		Designer Range		Standard Range		Standard Range	ECO Range			Compact 4-way flow Range	Circular flow Range		
		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEH07/09/12/14 KJCAL, KJCALB, ASYH07/09/12/14 KJCA, KJCA-B	ASEG07/09/12/14 KETF, KETF-B, ASYG07/09/12/14 KETE, KETE-B	ASEH07/09/12/14 KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG18/24KMTE	ASEH30/36KMTB	ASEH07/09/12KNCA	ASEG07/09/12KPCE	ASEH07/09/12KLTA	AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLB	
													
Interfaces	MODBUS® Converter		● UTY-VMSX					● UTY-VMSX					● UTY-VMSX
	MODBUS® interface	 	● FG-AC-MBS1Z1		● FG-AC-MBS1Z1			● FG-AC-MBS1Z1					● FG-RC-MBS1Z1 FG-AC-MBS1Z1
			● FG-IR-BMG1Z1		● FG-IR-BMG1Z1								
	KNX® converter		● UTY-VKSX					● UTY-VKSX					● UTY-VKSX
	KNX® interface	 	● FG-AC-KNX1Z1		● FG-AC-KNX1Z1			● FG-AC-KNX1Z1					● FG-RC-KNX1Z1 FG-AC-KNX1Z1
			● FG-IR-KNX1Z1		● FG-IR-KNX1Z1								
	WLAN adapter	 											● UTY-TFSXJ3
			● Accessory (KGTG, KGTG , KJCAL , KJCALB , KETF, KETF-B, KMCG, KMCF) UTY-TFSXH3 (KGTE, KJCA, KJCA-B , KETE, KETE-B, KMCE)				● UTY-TFSXH3	● UTY-TFSXH3	● Accessory	● UTY-TFSXH3			
		 	● FG-AC-WIF1Z1		● FG-AC-WIF1Z1			● FG-AC-WIF1Z1					● FG-RC-WIF1Z2 FG-AC-WIF1Z1
			● FG-IR-WIF1Z1		● FG-IR-WIF1Z1								
		 	● FG-AC-WMP1Z1		● FG-AC-WMP1Z1			● FG-AC-WMP1Z1					● FG-RC-WMP1Z1 FG-AC-WMP1Z1
			● FG-IR-WMP1Z1		● FG-IR-WMP1Z1								
	External switch controller		● UTY-TERX+UTY-TWRXZ2					● UTY-TERX+UTY-TWRXZ2					● UTY-TERX
	Network converter for single-split type	 	● UTY-VTGX+UTY-TWRXZ2 or UTY-VTGXV+UTY-TWRXZ2					● UTY-VTGX+UTY-TWRXZ2 or UTY-VTGXV+UTY-TWRXZ2					● UTY-VTGX UTY-VTGXV

\*There are no optional parts for the KL Series.























\*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed. \*2: Available only when the WLAN adapter (UTY-TFSXJ3) is removed.

\*3: Consult your dealer for conditions of use.

Controller System List (available) for Split/Multi-Split

Controller Options/Accessories:



Type		Refrigerant	Indoor unit						Indoor unit									Outdoor unit			
			Duct						Floor	Ceiling	Multi-split						Single phase				
			Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure				BIG	Wall-mounted			Compact cassette	Mini duct	Slim duct	5/6-unit multi-split			
			ARXG 09/12/14/18 KLLAP	ARXH 12/14/1822/24/ 30/36/45/54 KMTAP	ARXG 12/14/18/22/24/ 30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA		ARXG45/54KHTB		AGEG 09/12/14 KVCA	ABEG 18/22/24/30/ 36/45/54 KRTA	ASEH05 KJCAL,KJCALB ASYH05 KJCA,KJCA-B	ASEH05KNCA	ASEG22KMTE	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP	AOEG36KBTAS			
									ARYG60LHTA	ARYG72/90LHTA									AOYG45LBLA6		
Interfaces	MODBUS® Converter		● UTY-VMSX							● UTY-VMSX	● UTY-VMSX*2	● UTY-VMSX			● UTY-VMSX*1	● UTY-VMSX					
	MODBUS® interface	 	● FG-RC-MBS1Z1 FG-AC-MBS1Z1						● FG-AC-MBS1Z1	● FG-RC-MBS1Z1	● FG-RC-MBS1Z1 FG-AC-MBS1Z1	● FG-AC-MBS1Z1				● FG-AC-MBS1Z1	● FG-RC-MBS1Z1 FG-AC-MBS1Z1				
			● FG-IR-BMG1Z1+ UTY-LBTYC	● FG-IR-BMG1Z1+ UTY-LBTYM						● FG-IR-BMG1Z1+ UTY-LRHYM	● FG-IR-BMG1Z1+ UTY-LRHYM	● FG-IR-BMG1Z1						● FG-IR-BMG1Z1+ UTY-LBTYM			
	KNX® converter		● UTY-VKSX							● UTY-VKSX	● UTY-VKSX*2	● UTY-VKSX			● UTY-VKSX*1	● UTY-VKSX					
	KNX® interface	 	● FG-RC-KNX1Z1 FG-AC-KNX1Z1						● FG-AC-KNX1Z1	● FG-RC-KNX1Z1	● FG-RC-KNX1Z1 FG-AC-KNX1Z1	● FG-AC-KNX1Z1				● FG-AC-KNX1Z1	● FG-RC-KNX1Z1 FG-AC-KNX1Z1				
			● FG-IR-KNX1Z1+ UTY-LBTYC	● FG-IR-KNX1Z1+ UTY-LBTYM						● FG-AC-KNX1Z1+ UTY-LBTGM	● FG-IR-KNX1Z1+ UTY-LRHYM	● FG-IR-KNX1Z1+ UTY-LRHYM	● FG-IR-KNX1Z1						● FG-IR-KNX1Z1+ UTY-LBTYM		
	WLAN adapter	 	● UTY-TFSXJ3							● UTY-TFSXJ3						● UTY-TFSXJ3					
												● Accessory (KJCAL , KJCALB) UTY-TFSXH3 (KJCA, KJCA-B)	● Accessory	● UTY-TFSXH3							
		 	● FG-RC-WIF1Z2 FG-AC-WIF1Z1						● FG-AC-WIF1Z1	● FG-RC-WIF1Z2	● FG-RC-WIF1Z2 FG-AC-WIF1Z1	● FG-AC-WIF1Z1				● FG-AC-WIF1Z1	● FG-RC-WIF1Z2 FG-AC-WIF1Z1				
			● FG-IR-WIF1Z1+ UTY-LBTYC	● FG-IR-WIF1Z1+ UTY-LBTYM						● FG-IR-WIF1Z1+ UTY-LRHYM	● FG-IR-WIF1Z1+ UTY-LRHYM	● FG-IR-WIF1Z1						● FG-IR-WIF1Z1+ UTY-LBTYM			
		 	● FG-RC-WMP1Z1 FG-AC-WMP1Z1						● FG-AC-WMP1Z1	● FG-RC-WMP1Z1	● FG-RC-WMP1Z1 FG-AC-WMP1Z1	● FG-AC-WMP1Z1				● FG-AC-WMP1Z1	● FG-RC-WMP1Z1 FG-AC-WMP1Z1				
			● FG-IR-WMP1Z1+ UTY-LBTYC	● FG-IR-WMP1Z1+ UTY-LBTYM						● FG-IR-WMP1Z1+ UTY-LRHYM	● FG-IR-WMP1Z1+ UTY-LRHYM	● FG-IR-WMP1Z1						● FG-IR-WMP1Z1+ UTY-LBTYM			
	External switch controller		● UTY-TERX							● UTY-TERX	● UTY-TERX+ UTY-TWRXZ3	● UTY-TERX+ UTY-TWRXZ2			● UTY-TERX+ UTY-TWRXZ2	● UTY-TERX					
	Network converter for single-split type	 	● UTY-VTGX UTY-VTGXV							● UTY-VTGX UTY-VTGXV	● UTY-VTGX+ UTY-TWRXZ3 UTY-VTGXV+ UTY-TWRXZ3	● UTY-VTGX+ UTY-TWRXZ2 or UTY-VTGXV+ UTY-TWRXZ2			● UTY-VTGX+ UTY-TWRXZ2 or UTY-VTGXV+ UTY-TWRXZ2	● UTY-VTGX UTY-VTGXV					

\*There are no optional parts for the KL Series.

\*1: Available only when the WLAN adapter (UTY-TFSXH3) is removed. \*2 Available only when the WLAN adapter (UTY-TFSXJ3) is removed.




































\*3 Consult your dealer for conditions of use.



# Controller System List (available) for VRF

Controller Options:















Type		Refrigerant	Indoor unit							Indoor unit						
			Cassette							Duct						
			1-way Flow	3D flow	Compact type	High Efficiency	Circular Flow Range			Compact type (45cm Duct)	Slim Duct		Low static pressure		Medium static pressure	High static pressure
							Slim type	Large type					High Efficiency	High Efficiency	Normal	Normal
					AUXB 004/005/007/009/ 012/014/018 HLAH	AUXN 009/012/014 HLAH					ARXD 004/005/007/009/012/ 014/018/024 HLAH	ARXP 009/012/014 HLAH				
			AUXV 004/007/009/012/ 014/018/024 GLEH	AUXS018/024GLEH	AUXB 004/007/009/012/ 014/018/024 GLEH		AUXM 018/024/030 GLEH	AUXK 018/024/030/034/ 036/045/054 GLEH	ARXK 004/007/009/012/ 014/018/024 GLGH	ARXD04GALH	ARXD 007/009/012/ 014/018/024 GLEH		ARXP018/030GLFH	ARXA 024/030/036/045 GLEH	ARXC 036/045/060/ 072/090/096 GTEH	
Controllers	Wired remote controller		 UTY-RVRY  UTY-RVRY													
			 UTY-RNRYZ5  UTY-RNRYZ5													
			 UTY-RLRY  UTY-RLRY													
			 UTY-RCRYZ1  UTY-RCRYZ1													
	Simple remote controller	 Nonpolar 2-core type	 UTY-RSRY UTY-RHRY  UTY-RSRY UTY-RHRY													
	Wireless remote controller	 UTY-LNVY UTY-LNHY	 UTY-LNVY UTY-LNHY  UTY-LNVY UTY-LNHY													
	IR receiver unit		 UTY-TRHX			 UTY-LBHXD			 UTY-TRHX	 UTB-YWC	 UTY-TRHX					
	Central remote controller		 UTY-DCGYZ3  UTY-DCGYZ3													
Touch panel controller		 UTY-DTGYZ1  UTY-DTGYZ1														
System controller, System controller Lite		 UTY-APGXZ1, UTY-ALGXZ1  UTY-APGXZ1, UTY-ALGXZ1														

Controller System List (available) for VRF

Controller Options:

























Type	Refrigerant	Indoor unit				Indoor unit					
		Floor		Ceiling/ Floor	Ceiling	Wall-mounted					
		EEV Internal	EEV External			EEV Internal	EEV External	EEV Internal	EEV External	EEV Internal	EEV Internal
						ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH				
		AGYA 004/007/009/012/014 GCGH	AGYE 004/007/009/012/014 GCEH	ABYA 012/014/018/024 GTEH	ABYA 030/036/045/054 GTEH	ASYA 004/007/009 GCGH	ASYE 004/007/009 GCEH	ASYA012/014GCGH	ASYE012/014GCEH	ASYA18/24GBCH	ASYA030/034GTEH
Controllers	Wired remote controller		● UTY-RVRY				● UTY-RVRY				
			● UTY-RNRYZ5				● UTY-RNRYZ5				
			● UTY-RLRY				● UTY-RLRY				
			● UTY-RCRYZ1				● UTY-RCRYZ1				
	Simple remote controller	 Nonpolar 2-core type	● UTY-RSRY UTY-RHRY				● UTY-RSRY UTY-RHRY				
	Wireless remote controller	 UTY-LNVY UTY-LNHY	● UTY-LNVY UTY-LNHY				● UTY-LNVY UTY-LNHY				
	IR receiver unit										
	Central remote controller		● UTY-DCGYZ3				● UTY-DCGYZ3				
	Touch panel controller		● UTY-DTGYZ1				● UTY-DTGYZ1				
	System controller, System controller Lite		● UTY-APGXZ1, UTY-ALGXZ1				● UTY-APGXZ1, UTY-ALGXZ1				



# Controller System List (available) for VRF

Controller Options:



Type	<div>Refrigerant</div>	Indoor unit						Indoor unit																						
		Cassette						Duct																						
		1-way Flow	3D flow	Compact type	High Efficiency	Circular Flow Range		Compact type (45cm Duct)	Slim Duct		Low static pressure		Medium static pressure	High static pressure																
						Slim type	Large type				High Efficiency	High Efficiency			Normal	Normal														
	<div>R32</div>			AUXB 004/005/007/009/ 012/014/018 HLAH	AUXN 009/012/014 HLAH					ARXD 004/005/007/009/ 012/014/018/024 HLAH	ARXP 009/012/014 HLAH																			
	<div>R410A</div>	AUXV 004/007/009/012/ 014/018/024 GLEH	AUXS018/024GLEH	AUXB 004/007/009/012/ 014/018/024 GLEH		AUXM 018/024/030 GLEH	AUXK 018/024/030/034/ 36/045/054 GLEH	ARXK 004/007/009/012/ 014/018/024 GLGH	ARXD04GALH	ARXD 007/009/012/ 014/018/024 GLEH		ARXP018/030GLFH	ARXA 024/030/036/045 GLEH	ARXC 036/045/060/ 072/090/096 GTEH																
Interfaces	BACnet® gateway	<div></div>	<div>●</div> UTY-ABGXZ1, UTY-VBGX												<div>●</div> UTY-ABGXZ1, UTY-VBGX															
		<div></div> <div>CN connector type</div>	<div>●</div> FG-AC-BAC1Z1						<div>●</div> FG-AC-BAC1Z1			<div>●</div> FG-AC-BAC1Z1																		
		<div></div> <div>IR type</div>	<div>●</div> FG-IR-BMG1Z1+UTY-TRHX		<div>●</div> FG-IR-BMG1Z1		<div>●</div> FG-IR-BMG1Z1+UTY-LBHXD			<div>●</div> FG-IR-BMG1Z1+UTY-TRHX	<div>●</div> FG-IR-BMG1Z1+UTB-YWC	<div>●</div> FG-IR-BMG1Z1+UTY-TRHX																		
	Network converter for LonWorks™	<div></div>	<div>●</div> UTY-VLGX														<div>●</div> UTY-VLGX													
	MODBUS® Converter	<div></div>	<div>●</div> UTY-VMSX												<div>●</div> UTY-VMSX			<div>●</div> UTY-VMSX												
		<div></div>	<div>●</div> UTY-VMGX FG-TL-MBS16Z1														<div>●</div> UTY-VMGX FG-TL-MBS16Z1													
	MODBUS® interface	<div><div>3-wire RC-line type</div></div> <div><div>CN connector type</div></div>	<div>●</div> FG-AC-MBS1Z1						<div>●</div> FG-AC-MBS1Z1		<div>●</div> FG-RC-MBS1Z1	<div>●</div> FG-AC-MBS1Z1																		
		<div></div> <div>IR type</div>	<div>●</div> FG-IR-BMG1Z1+UTY-TRHX		<div>●</div> FG-IR-BMG1Z1		<div>●</div> FG-IR-BMG1Z1+UTY-LBHXD			<div>●</div> FG-IR-BMG1Z1+UTY-TRHX	<div>●</div> FG-IR-BMG1Z1+UTB-YWC	<div>●</div> FG-IR-BMG1Z1+UTY-TRHX																		
	KNX® converter	<div></div>	<div>●</div> UTY-VKSX												<div>●</div> UTY-VKSX			<div>●</div> UTY-VKSX												
		<div></div>	<div>●</div> UTY-VKGX FG-TL-KNX16Z1														<div>●</div> UTY-VKGX FG-TL-KNX16Z1													
	KNX® interface	<div><div>3-wire RC-line type</div></div> <div><div>CN connector type</div></div>	<div>●</div> FG-AC-KNX1Z1						<div>●</div> FG-AC-KNX1Z1		<div>●</div> FG-RC-KNX1Z1	<div>●</div> FG-AC-KNX1Z1																		
		<div></div> <div>IR type</div>	<div>●</div> FG-IR-KNX1Z1+UTY-TRHX		<div>●</div> FG-IR-KNX1Z1		<div>●</div> FG-IR-KNX1Z1+UTY-LBHXD			<div>●</div> FG-IR-KNX1Z1+UTY-TRHX	<div>●</div> FG-IR-KNX1Z1+UTB-YWC	<div>●</div> FG-IR-KNX1Z1+UTY-TRHX																		
	WLAN adapter	<div></div> <div>CN connector type¹</div>	<div>●</div> UTY-TFSXJ3							<div>●</div> UTY-TFSXJ3 (007-024)		<div>●</div> UTY-TFSXJ3																		
		<div><div>3-wire RC-line type</div></div> <div><div>CN connector type</div></div>	<div>●</div> FG-AC-WIF1Z1						<div>●</div> FG-AC-WIF1Z1		<div>●</div> FG-RC-WIF1Z2	<div>●</div> FG-AC-WIF1Z1																		
		<div></div> <div>IR type</div>	<div>●</div> FG-IR-WIF1Z1+UTY-TRHX		<div>●</div> FG-IR-WIF1Z1		<div>●</div> FG-IR-WIF1Z1+UTY-LBHXD			<div>●</div> FG-IR-WIF1Z1+UTY-TRHX	<div>●</div> FG-IR-WIF1Z1+UTB-YWC	<div>●</div> FG-IR-WIF1Z1+UTY-TRHX																		
		<div><div>3-wire RC-line type</div></div> <div><div>CN connector type</div></div>	<div>●</div> FG-AC-WMP1Z1						<div>●</div> FG-AC-WMP1Z1		<div>●</div> FG-RC-WMP1Z1	<div>●</div> FG-AC-WMP1Z1																		
		<div></div> <div>IR type</div>	<div>●</div> FG-IR-WMP1Z1+UTY-TRHX		<div>●</div> FG-IR-WMP1Z1		<div>●</div> FG-IR-WMP1Z1+UTY-LBHXD			<div>●</div> FG-IR-WMP1Z1+UTY-TRHX	<div>●</div> FG-IR-WMP1Z1+UTB-YWC	<div>●</div> FG-IR-WMP1Z1+UTY-TRHX																		
	External switch controller	<div></div>	<div>●</div> UTY-TERX														<div>●</div> UTY-TERX													

# Controller System List (available) for VRF

Controller Options:



Type	Refrigerant	Indoor unit				Indoor unit Wall-mounted					
		Floor		Ceiling/ Floor	Ceiling	EEV Internal	EEV External	EEV Internal	EEV External	EEV Internal	EEV Internal
		EEV Internal	EEV External								
						ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH				
		AGYA 004/007/009/012/014 GCGH	AGYE 004/007/009/012/014 GCEH	ABYA 012/014/018/024 GTEH	ABYA 030/036/045/054 GTEH	ASYA 004/007/009 GCGH	ASYE 004/007/009 GCEH	ASYA012/014GCGH	ASYE012/014GCEH	ASYA18/24GBCH	ASYA030/034GTEH
Interfaces	BACnet® gateway		● UTY-ABGXZ1, UTY-VBGX				● UTY-ABGXZ1, UTY-VBGX				
			● FG-AC-BAC1Z1				● FG-AC-BAC1Z1				● FG-AC-BAC1Z1
			● FG-IR-BMG1Z1				● FG-IR-BMG1Z1				
	Network converter for LonWorks™		● UTY-VLGX				● UTY-VLGX				
			● UTY-VMSX				● UTY-VMSX				● UTY-VMSX
	MODBUS® Converter		● UTY-VMGX FG-TL-MBS16Z1				● UTY-VMGX FG-TL-MBS16Z1				
			● FG-AC-MBS1Z1				● FG-AC-MBS1Z1			● FG-RC-MBS1Z1	● FG-AC-MBS1Z1
	MODBUS® interface		● FG-IR-BMG1Z1				● FG-IR-BMG1Z1				
			● UTY-VKSX				● UTY-VKSX				● UTY-VKSX
	KNX® converter		● UTY-VKGX FG-TL-KNX16Z1				● UTY-VKGX FG-TL-KNX16Z1				
			● FG-AC-KNX1Z1				● FG-AC-KNX1Z1			● FG-RC-KNX1Z1	● FG-AC-KNX1Z1
	KNX® interface		● FG-IR-KNX1Z1				● FG-IR-KNX1Z1				
			● UTY-TFSXJ3				● UTY-TFSXJ3				● UTY-TFSXJ3
	WLAN adapter		● FG-AC-WIF1Z1				● FG-AC-WIF1Z1			● FG-RC-WIF1Z2	● FG-AC-WIF1Z1
			● FG-IR-WIF1Z1				● FG-IR-WIF1Z1				
			● FG-AC-WMP1Z1				● FG-AC-WMP1Z1			● FG-AC-WMP1Z1	● FG-AC-WMP1Z1
			● FG-IR-WMP1Z1				● FG-IR-WMP1Z1				
			● UTY-TERX				● UTY-TERX				

# Optional Parts Overview

For Split & Multi-split, VRF

A variety of optional parts are available to enable installation of the selected indoor unit properly according to the environment.

## Optional Parts For Cassette




### Occupancy sensor kit

A built-in thermo sensor monitors and controls room temperature accurately.



### Cassette grille

A lineup of cassette grilles that match a variety of interiors. A grid ceiling-type cassette grille has been added to the lineup.




### Silver ion filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.\*




### Fresh air intake kit

Fresh air can be taken in by a fan connected to an external control unit.




### Insulation kit for high humidity

Insulation kit for high humidity is used when the installation location is in a high humidity environment.




### Air outlet shutter plate

Airflow directions can be changed to 3 directions using the Air outlet shutter plate depending on the installation location.



### Wide Panel

When a cassette type is installed in a narrow space in the ceiling, the wide panel fills in that space.



### Panel spacer

If the ceiling space is tight and the main body protrudes from the ceiling surface, a panel spacer can be used as a decorative trim.

## Optional Parts For V-IV



### Pressure sensor kit

When installed, the height difference between the outdoor unit and indoor unit can be allowed up to 110 m.

## Optional Parts For R32 VRF products



### Gas Sensor kit

Used to ensure standards compliance and safety when R32 VRF products are installed.



### Expansion kit

Connect to indoor units to expand the number of inputs and outputs when using multiple safety devices or external input / output functions.

## Optional Parts For Floor




### Half concealed kit

Used to half conceal a floor type indoor unit in the wall.



### Silver ion filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.\*

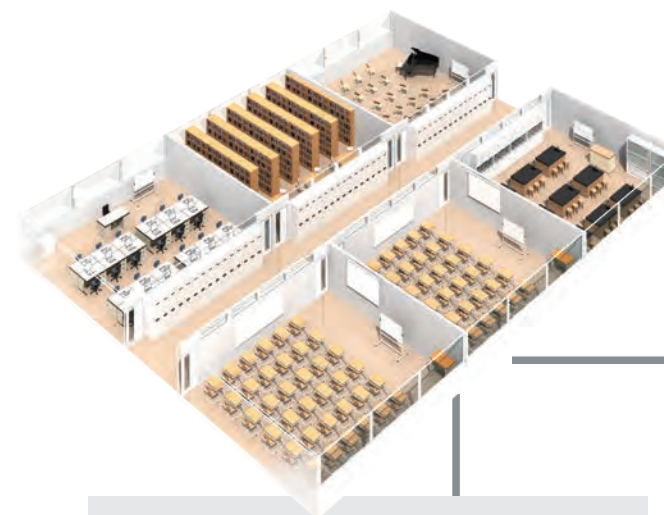


## Optional Parts For Common



### Remote sensor unit

Detects the room temperature around the sensor. Used to construct systems that improve comfort. (See the options list for compatible devices.)



### External connect kit & set

Connect the printed circuit board (PCB) to external devices.



### Connection Units

Connection units are available to separate the pipes when connecting multiple indoor units in a Multi-split type or VRF system.



### External power supply unit


The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.

## Optional Parts For Duct & Ceiling



### Auto louver grille kit

The optional clean-looking flat Auto louver grille blends into any interior and provides a comfortable airflow.



### Silver ion filter

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.\*




### Long-life filter

Captures grit and dust. Long-life design with consideration of running costs.



### Flange

Flanges are used when connecting a medium static pressure duct type and a ceiling type with air intake and exhaust ducts.



### Drain pump unit

Drains water that has accumulated during operation.

## Connection Parts



### Communication kit

Required for a wall-mounted type when the External connect kit set or a Wired remote controller is connected to the indoor unit.



### External input and output PCB

For Wall-mounted, Duct, or Cassette type, these parts are required when the external input and output function is used.



### External input and output PCB box & bracket

Box and bracket for installing the External input and output PCB.

\*Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.





## Silver Ion Filter

UTR-FA16-5 / UTR-FA13-3 / UTR-FA03-5 / UTD-HFAA / UTD-HFRA / UTD-HFTA / UTD-HFTB / UTD-HFTC / UTD-HFNC / UTD-HFNB / UTD-HFNA / UTD-HFND / UTD-HFKB / UTD-HFKA



For Wall-mounted / Floor  
UTR-FA16-5 / UTR-FA13-3  
UTR-FA03-5

For Cassette  
UTD-HFAA / UTD-HFRA


For Duct  
UTD-HFTA / UTD-HFTB  
UTD-HFTC / UTD-HFNC  
UTD-HFNB / UTD-HFNA  
UTD-HFND / UTD-HFKB  
UTD-HFKA

### The Silver Ion Filter Helps to Keep Indoor Air Free from Viruses, Bacteria and Molds.

(Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.)

### The Silver Ion Filter Inhibits The Activities of Viruses\*<sup>1</sup>, Bacteria\*<sup>2</sup> and Molds\*<sup>3</sup> Trapped on the Filter.

(Only effective when the microorganism is trapped on the filter with dust or droplet)

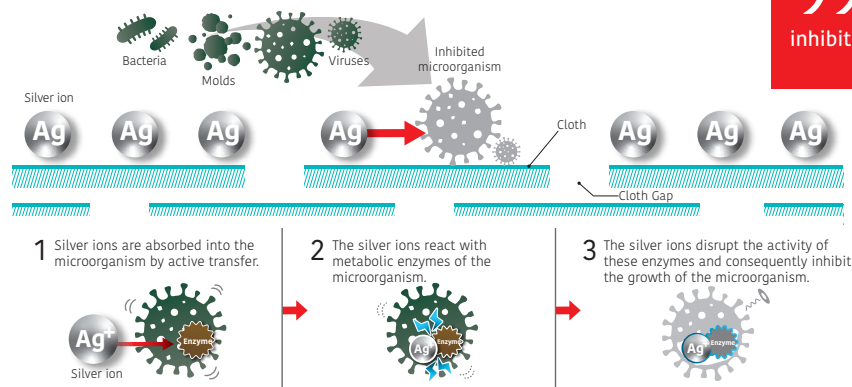


\*<sup>1</sup> [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020\_0408 [Test virus] Escherichia coli phage Qbeta NBRC 20012 (1 type) [Test Method] Based on the antiviral test method for textile products (JIS L 1922) [Test results] Inhibited by at least 99% in 24 hours. Not tested to prevent transmission of SARS-CoV-2.

\*<sup>2</sup> [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020\_0409 [Test bacteria] Escherichia coli NBRC 3972 (1 type) [Test Method] Based on the determination of antibacterial activity and efficacy of textile products (JIS L 1902) [Test results] The growth of the test bacteria was inhibited by 24 hours testing

\*<sup>3</sup> [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020\_0410 [Test fungi] Aspergillus Niger NBRC 105649 and other fungi (3 types) [Test Method] Based on the test for fungus resistance (JIS Z 2911) [Test results] The growth of the fungus was inhibited by 28 days testing

### The Filter is Easily Removable\* and Hand-Washable.

(\*Wall-mounted and floor models only)

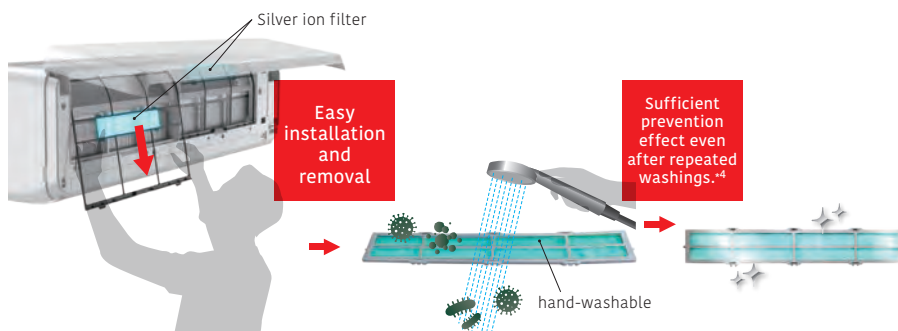

\*<sup>4</sup> Hand-washing or vacuuming by 3 months is recommended. Cleaning frequency varies depending on the environment of use.

#### Specifications

Model name		For Wall-mounted / Floor			for Cassette	
		UTR-FA16-5	UTR-FA13-3	UTR-FA03-5	UTD-HFAA	UTD-HFRA
Net Dimension (H × W × D)	mm	35 × 210 × 6	50 × 364 × 6	43 × 272 × 6	350 × 125 × 6	550 × 136 × 6
Weight	g	2	2	2	7	23
Quantity		2	2	2	1	1

Model name		for Duct							
		UTD-HFTA	UTD-HFTB	UTD-HFTC	UTD-HFNC	UTD-HFNB	UTD-HFNA	UTD-HFND	UTD-HFKB
Net Dimension (H × W × D)	mm	290 × 70 × 6	390 × 70 × 6	290 × 70 × 6 390 × 70 × 6	620 × 88 × 6	420 × 88 × 6	620 × 88 × 6	500 × 79 × 6	420 × 125 × 6
Weight	g	6	8	10	8	10	16	12	16
Quantity		2	2	3	1	2	2	2	2

## Auto Louver Grille Kit

UTD-GXTA-W / UTD-GXTB-W / UTD-GXTC-W



The optional clean-looking flat Auto louver grille kit blends into any interior and provides a comfortable airflow.




Closed louver



Open louver

### Flexible Control

- The Auto louver grille of the indoor unit can be operated in conjunction with the remote control of the indoor unit.
- Vertical auto swing**
  - Auto airflow direction and auto swing
  - 4 steps selectable
- Auto-closing louver**  
The louvers will automatically close when the indoor unit stops operating.

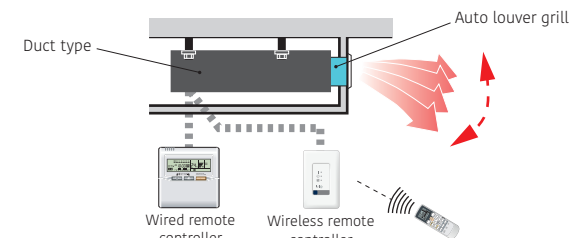

### Dimensions

		Unit: mm					
Model name		W1	W2	H1	H2	D1	D2
UTD-GXTA-W		683	645	180	148	9	84
UTD-GXTB-W		883	845				
UTD-GXTC-W		1,083	1,045				

#### Specifications

Model name		UTD-GXTA-W	UTD-GXTB-W	UTD-GXTC-W
Applicable indoor unit	Split & Multi-split	ARYG07/09LLTA ARXG07/09/12/14KSLAP ARXG07/09/12/14KLLAP ARYG07/09LSLAP	ARXG18KSLAP ARXG18KLLAP	
	VRF	ARXD007/009/012/014GLEH ARXK004/007/009/012/014GLGH ARXD04GALH ARXD004/005/007/009/012/014HLAH ARXP009/012/014HLAH	ARXD018GLEH ARXD018HLAH ARXK018GLGH	ARXD024GLEH ARXD024HLAH ARXK024GLGH
Power supply		Connecting with Control box of indoor unit		
Fixing Auto louver grille		Screwed to Flange or Square duct		
Extension Square duct limit		1.0 m (Max. duct length between indoor unit and Auto louver grille)		
Net Dimensions (H × W × D)		mm	180 × 683 × (84 + 9)	180 × 883 × (84 + 9)
Weight	Net	kg (lbs)	2.0 (4.4)	2.5 (5.6)
				3.0 (6.7)
Accessories		Fitting Flame, etc.		
Operating range	Cooling	°C	18 to 32	
		% RH	80 % or less	
	Heating	°C	16 to 30	


## Pressure Sensor Kit

UTY-SPWX




### Design Flexibility

The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-IV series, but can be extended to 110 m by installing the Pressure sensor kit. (Can only be connected to the V-IV series. Also, it can only be connected to outdoor units using outdoor unit software compatible with the product.)

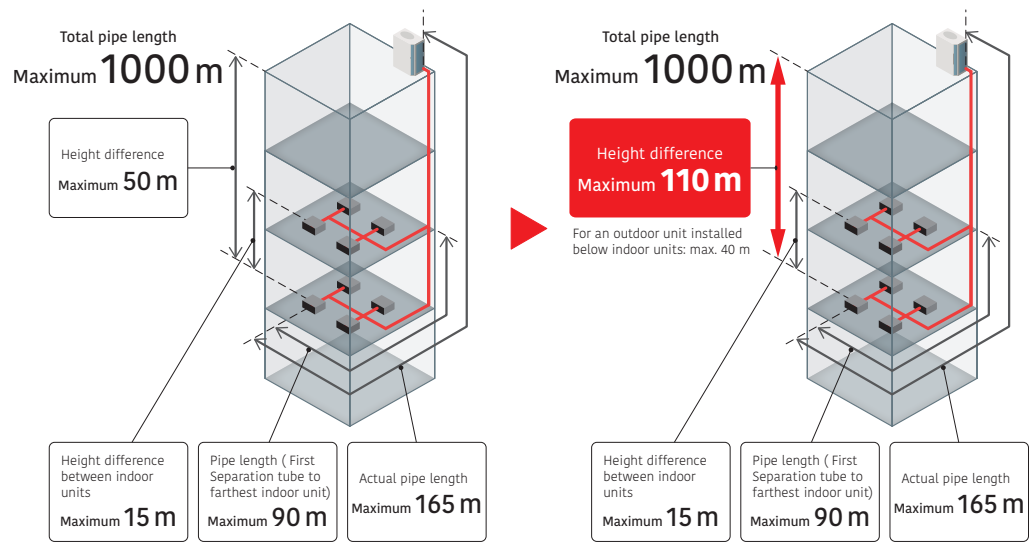

### System Overview

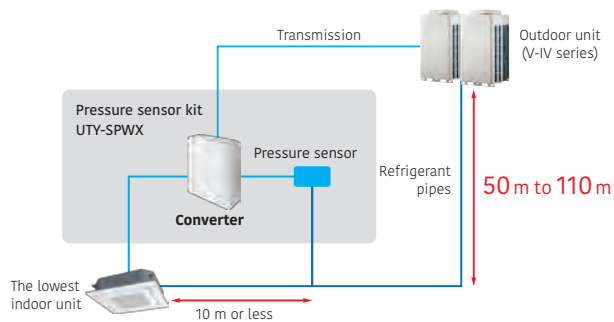

### Pressure Sensor Kit

Pressure sensor kit (Converter)	Refrigerant pressure sensor	Joint pipe

#### Specifications

Model name	UTY-SPWX
Power supply	9 to 16 V DC
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200

## External Power Supply Unit

UTZ-GXXA / UTZ-GXXC




### The External Power Supply Unit Protects The Increment in The System Even If The Power Supply for Some of The Indoor Units is Shut Down.

Connects to the External power supply unit to supply power to the indoor unit from the auxiliary power supply. This allows for continuous operation without system errors. Built-in relays reduce installation time and cost. The UTZ-GXXC have a built-in relay, which reduces installation time and cost.

### High Reliability

- A: Interruption of the main power supply is detected by the power cut-off detection part.
- B: Supplies power for driving the expansion valve of the indoor unit. (12 V or 5 V DC)
- C: Gives notification of the power supply from the External power supply unit.

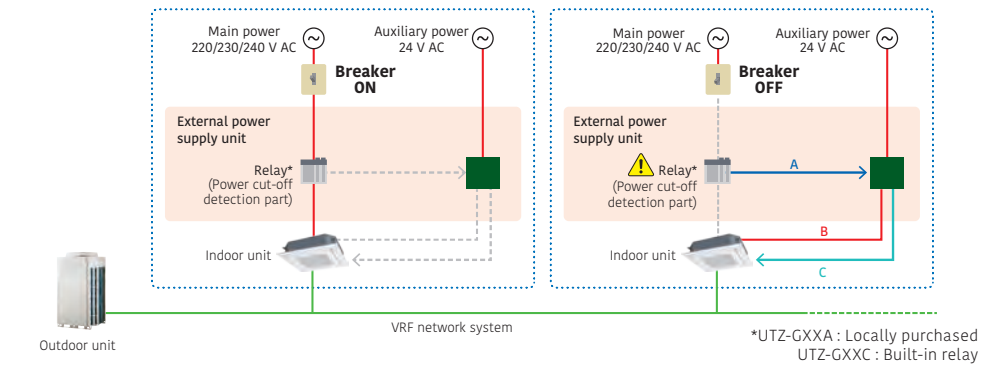

#### Note

- When changing the power supply voltage to 24 V AC, use a power transformer with an insulated structure that complies with the regulations\* of the installation region.
- A powered-off indoor unit driven by the External power supply unit is treated in the same way as an operation-off unit in the electricity charge appointment function. If standby power is generated, the result of the electricity charge appointment may not be zero.


\* UL Class II or IEC 61558 Class III, for example.

#### Specifications


Model name	UTZ-GXXA	UTZ-GXXC
Power supply	24 V AC 50/60 Hz	
Dimensions (H × W × D) (mm)	97 × 200 × 178	
Weight (g)	800	

## AIR BEAM Radiation Air Outlet Unit


\*Production by order  
Contact us for more details.



### Key component



### Cross-section view

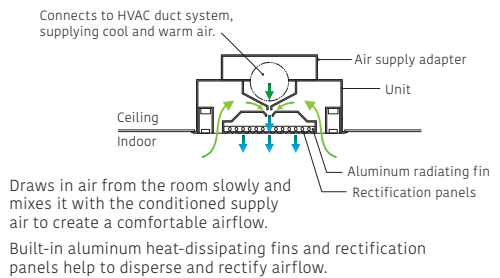

Airflow rate (m³/h)	180 (160-215)	270 (240-325)
Grid	600 × 2	600 × 3
AIR BEAM For system ceiling (Integrated type)	KS-180	KS-270


# Gas Sensor kit

UTY-SGZY



## Enhanced Safety measures for R32

The system is designed to meet the environmental safety requirements specified in the IEC 603352-40 standard for the use of R32 refrigerant. The environment requiring safety measures is determined by the size of the room in relation to the amount of refrigerant required.

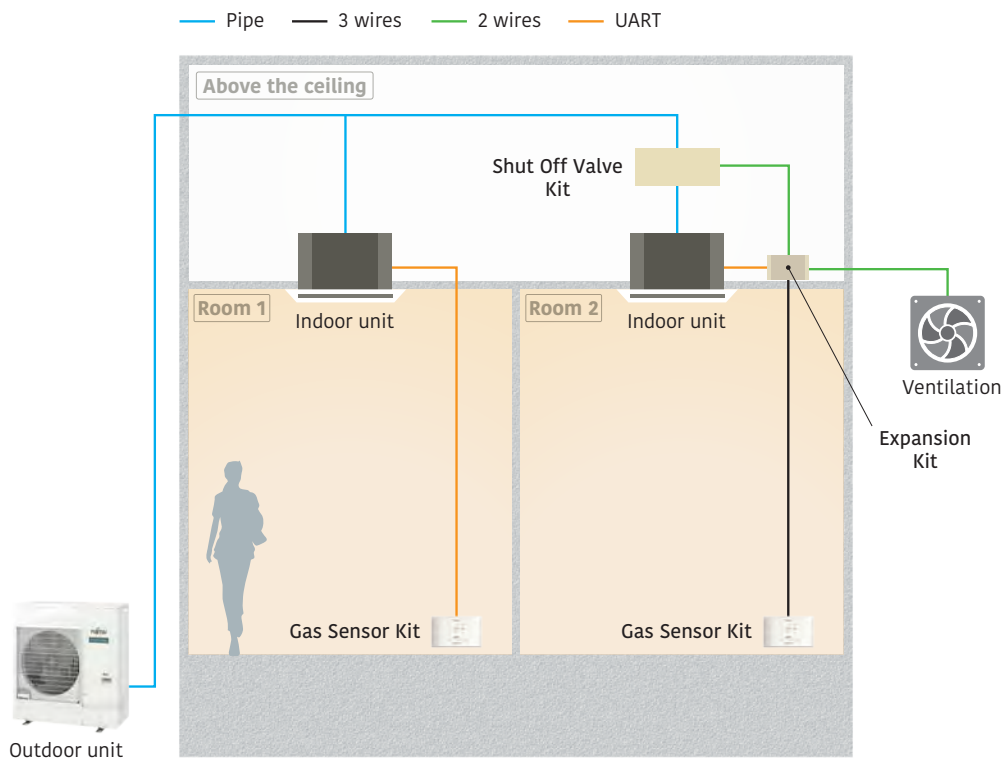

**Shut off valve kit**  
UTP-GX027A, UTP-GX060A

Block the path to prevent refrigerant flow in the event of a refrigerant leakage.

**Expansion kit**  
UTZ-JXXA

Used to ensure standards compliance and safety when R32 VRF products are installed.

**Gas sensor kit**  
UTY-SGZY\*

Used to ensure standards compliance and safety when R32 VRF products are installed.


\*Direct connection of the gas sensor kit to the indoor unit requires the UTY-XWZXZL connection cable.

## Conditions Requiring Safety Measures

When installing R32 VRF products, it is necessary to determine whether safety design is required. Conditions include the amount of refrigerant filled in the product and floor area. For details on how to confirm whether safety design is required, refer to the Design & Technical Manual.

Except lowest underground floor

For example, if a product with a total refrigerant charge of 5.5 kg is installed in a small room of 10 m<sup>2</sup>, two safety devices are required as it falls within the yellow area of the graph.

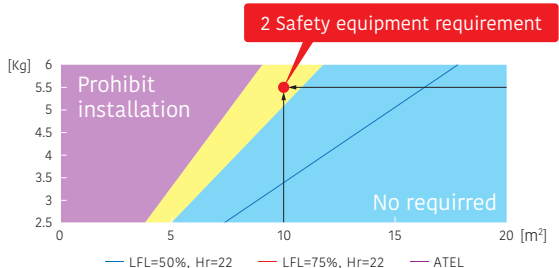


## Features: Gas sensor kit

### Connection pattern


1) Corresponds to the case where the classification of air conditioner installation differs from property to property.

Installation position of “Shut off valve kit”


For all system shut-off

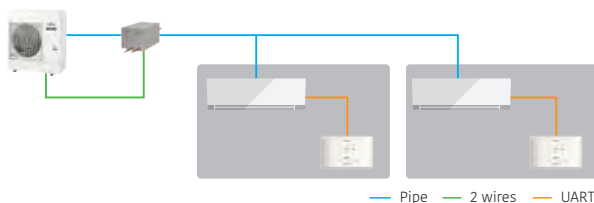


For R.C group shut-off

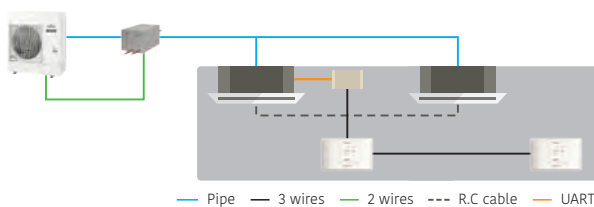

For several room shut-off

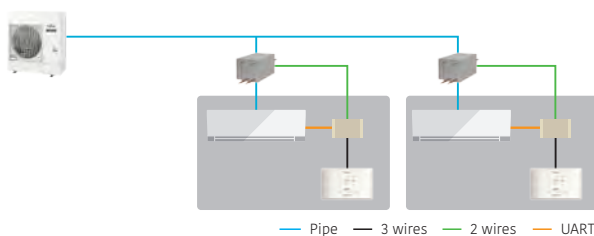

2) Multiple rooms or areas are air conditioned using ducted airflow paths

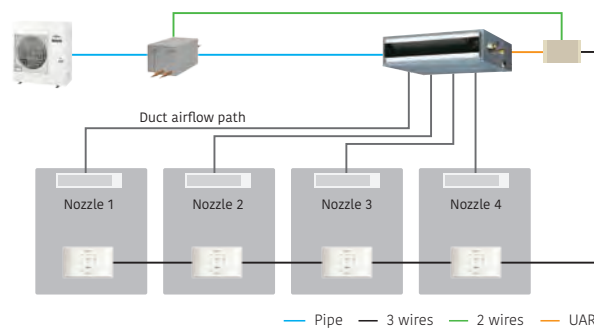


































### Specifications

Model name	UTY-SGZY
Dimensions (H × W × D) (mm)	80 × 130 × 35
Weight (g)	200




















Optional Parts List for Split/Multi-split



Type	Refrigerant	Indoor unit												
		Wall-mounted					Wall-mounted				Cassette			
		Designer Range			Standard Range		Standard Range		ECO Range				Compact 4-way flow range	Circular Flow Range
			ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEH07/09/12/14 KJCAL, KJCALB, ASYH07/09/12/14 KJCA, KJCA-B	ASEG07/09/12/14 KETF, KETF-B, ASYG07/09/12/14 KETE, KETE-B	ASEH07/09/12/14KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG18/24KMTE	ASEH30/36KMTB	ASEH05/07/09/12KNCA	ASEG07/09/12KPCE	ASEH07/09/12KLTA	ASEG18/24KLCA	AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLB
														
Occupancy sensor kit														
Remote sensor unit	 The remote sensor provides additional convenience.													
Cassette grille	 UTG-UFYF-W UTG-UKYA-W UTG-UFYD-W UTG-UKYC-W UTG-UKYA-B													
Auto louver grille kit														
Silver ion filter														
Long-life filter														
Flange														
Drain pump unit														
Wide Panel	 Indoor unit Panel 600 (mm) 600													
Panel spacer	 242 mm Panel spacer													
Fresh air intake kit	 For Compact cassette For Circular flow cassette													
Air outlet shutter plate	 For Compact cassette For Circular flow cassette													
Insulation kit for high humidity														
Half concealed kit	 Used to half conceal a floor type indoor unit in the wall.													
L-type piping kit														






















Optional Parts List for Split/Multi-split



Type	Refrigerant	Indoor unit						Floor	Ceiling	Indoor unit		
		Duct					Duct			4-way flow Compact cassette	Multi-split	
	Slim	Medium static pressure (High-Efficiency & comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure	Big				Mini duct	Slim duct	
		ARXG 09/12/14/18 KLLAP	ARXH 12/14/18/22/24/ 30/36/45/54 KMTAP	ARXG 12/14/18/22/24/ 30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB		AGEG09/12/14KVCA	ABEG 18/22/24/30/36/45/54 KRTA	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP
					ARYG60LHTA	ARYG72/90LHTA			AUYG07/09LVLA	ARYG07/09LSLAP	ARYG07/09LLTA	
Occupancy sensor kit												
Remote sensor unit	 The remote sensor provides additional convenience.	● UTY-XSZXZ1									● UTY-XSZXZ1	
Cassette grille										● UTG-UFYF-W (KVLA), UTG-UFYD-W (LVLA)		
Auto louver grille kit		● UTD-GXTA-W (09/12/14) UTD-GXTB-W (18)									● UTD-GXTA-W (07/09/12/14), UTD-GXTB-W (18)	
Silver ion filter		● UTD-HFTA (09/12/14) UTD-HFTB (18)	● UTD-HFNC (12/14/18) UTD-HFNB (22/24), UTD-HFNA(30/36/45/54)	● UTD-HFNC (12/14) UTD-HFNB (18/22/24/30) UTD-HFNA (36/45/54)	● UTD-HFND	● UTD-HFKB (45/54)	● UTD-HFKA	● UTR-FA03-5		● UTD-HFAA	● UTD-HFTA (07/09/12/14) UTD-HFTB (18)	● UTD-HFTA
Long-life filter			● UTD-LFDC (12/14/18) UTD-LFDB (22/24), UTD-LFDA (30/36/45/54)	● UTD-LFNA (36/45/54) UTD-LFNB (18/22/24/30) UTD-LFNC (12/14)	● UTD-LF25NA	● UTD-LF60KA (45/54)	● UTD-LFKA					
Flange					● UTD-SF045T UTD-RF204							
Drain pump unit					● UTZ-PX1NBA		● UTZ-PX1NAB			● UTR-DPB24T		
Wide Panel												
Panel spacer												
Fresh air intake kit										● UTZ-VXAA		
Air outlet shutter plate										● UTR-YDZB		
Insulation kit for high humidity										● UTZ-KXGC		
Half concealed kit	 Used to half conceal a floor type indoor unit in the wall.						● UTR-STA					
L-type piping kit									● UTP-FX24A (18/22/24) UTP-FX35A (30/36/45/54)			

## Optional Parts List for VRF
























Type	Refrigerant	Indoor unit							Indoor unit																						
		Cassette							Duct																						
	1-way Flow	3D flow	Compact type	High Efficiency	Circular Flow Range			Mini Duct	Slim Duct		Low static pressure		Medium static pressure	High static pressure																	
					Slim type	Large type					High Efficiency	High Efficiency		Normal	Normal																
				AUXB 004/005/007/009/ 012/014/018 HLAH	AUXN 009/012/014 HLAH					ARXD 004/005/007/009/ 012/014/018/024 HLAH	ARXP 009/012/014 HLAH																				
		AUXV 004/007/009/012/ 014/018/024 GLEH	AUXS018/024GLEH	AUXB 004/007/009/012/ 014/018/024 GLEH		AUXM 018/024/030 GLEH	AUXK 018/024/030/034/ 036/045/054 GLEH		ARXK 004/007/009/012/ 014/018/024 GLGH	ARXD04GALH	ARXD 007/009/012/ 014/018/024 GLEH		ARXP018/030GLFH	ARXA 024/030/036/045 GLEH	ARXC 036/045/060 GTEH	ARXC 072/090/096 GTEH															
Occupancy sensor kit						● UTY-SHZXC																									
Remote sensor unit		● UTY-XSZXZ1															● UTY-XSZXZ1														
Cassette grille		● UTG-UNYA-W (004-012) UTG-UNYB-W (014-024)	● UTG-USYA-W	● UTG-UFYE-W UTG-UFYC-W UTG-UFYH-W (for R32 models)	● UTG-UFYH-W	● UTG-UKYC-W UTG-UKYA-B																									
Auto louver grille kit								● UTD-GXTA-W (4-14), UTD-GXTB-W (18), UTD-GXTC-W (24)																							
Silver ion filter				● UTD-HFAA		● UTD-HFRA				● UTD-HFTA(004-014) UTD-HFTB (018) UTD-HFTC (024)	● UTD-HFTA	● UTD-HFTA(007-014) UTD-HFTB (018) UTD-HFTC (024)		● UTD-HFND		● UTD-HFKB															
Long-life filter														● UTD-LF25NA		● UTD-LF60KA															
Flange														● UTD-SF045T UTD-RF204																	
Drain Pump Unit														● UTZ-PX1NBA																	
Wide Panel						● UTG-AKXA-W																									
Panel spacer						● UTG-BKXA-W																									
Fresh air intake kit*1				● UTZ-VXAA			● UTZ-VXRA																								
Air outlet shutter plate:				● UTR-YDZB			● UTR-YDZK																								
Insulation kit for high humidity				● UTZ-KXGC			● UTZ-KXRA																								
Half concealed kit																															
External power supply unit		● UTZ-GXXA UTZ-GXXC		● UTZ-GXXA UTZ-GXXC (for R410A models)		● UTZ-GXXA UTZ-GXXC			● UTZ-GXXA UTZ-GXXC		● UTZ-GXXA UTZ-GXXC (for R410A models)				● UTZ-GXXA UTZ-GXXC																
Pressure sensor kit																															
Gas sensor kit				● UTY-SGZY+ UTY-XWZXZL* (for R32 models)								● UTY-SGZY+ UTY-XWZXZL* (for R32 models)		● UTY-SGZY+ UTY-XWZXZL*																	
Shut off valve kit				● UTP-GX027A UTP-GX060A (for R32 models)								● UTP-GX027A UTP-GX060A (for R32 models)																			
Expansion kit				● UTZ-JXXA (for R32 models)								● UTZ-JXXA (for R32 models)																			

\*Directly connecting the gas sensor kit to the indoor unit requires the UTY-XWZXZL connection cable.



Optional Parts List for VRF



Type	Refrigerant	Indoor unit				Indoor unit				Outdoor unit
		Floor		Floor/Ceiling	Ceiling	Wall-mounted				V-IV series
		EEV Internal	EEV External			EEV Internal	EEV External	EEV Internal	EEV Internal	
						ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH			
		AGYA 004/007/009/012/014 GCGH	AGYE 004/007/009/012/014 GCEH	ABYA 012/014/018/024 GTEH	ABYA 030/036/045/054 GTEH	ASYA 004/007/009012/014 GCGH	ASYE 004/007/009012/014 GCEH	ASYA18/24GBCH	ASYA030/034GTEH	AJY 072/090/108/126/144/162 LALDH
Occupancy sensor kit										
Remote sensor unit				● UTY-XSZXZ1		● UTY-XSZXZ1				
Cassette grille										
Auto louver grille kit										
Silver ion filter		● UTR-FA03-5				● UTR-FA16-5		● UTR-FA13-3		
Long-life filter										
Flange					● UTD-RF204					
Drain Pump Unit					● UTR-DPB24T					
Wide Panel										
Panel spacer										
Fresh air intake kit*1										
Air outlet shutter plate:										
Insulation kit for high humidity										
Half concealed kit		● UTR-STA								
External power supply unit		● UTZ-GXXA UTZ-GXXC				● UTZ-GXXA UTZ-GXXC (for R410A models)		● UTZ-GXXA UTZ-GXXC		
Pressure sensor kit										● UTY-SPWX
Gas sensor kit						● UTY-SGZY+ UTY-XWZXZL* (for R32 models)				
Shut off valve kit						● UTP-GX027A UTP-GX060A (for R32 models)				
Expansion kit						● UTZ-JXXA (for R32 models)				

\*Directly connecting the gas sensor kit to the indoor unit requires the UTY-XWZXZL connection cable.

## Function List for Split/Multi-Split



## External input and output function/External connect kit/communication kit

Type	Refrigerant	Indoor unit										Indoor unit								
		Wall-mounted										Cassette		Duct			Duct			
		Designer Range			Standard Range			ECO Range				Compact 4-way flow Range	Circular flow Range	Slim	Medium static pressure (High-Efficiency & Comfort)	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure		Big
		ASEH07/09/12/14KGTG, ASYG07/09/12/14KGTG, ASYG07/09/12/14KGTG	ASEH 07/09/12/14 KJCAL,KJCALB ASYH 07/09/12/14 KJCA,KJCA-B	ASEG 07/09/12/14 KETF, KETF-B ASYG 07/09/12/14 KETE, KETE-B	ASEH07/09/12/14KMCG, KMCG-B, ASYG07/09/12/14KMCF, ASYG07/09/12/14KMCE	ASEG 18/24 KMTE	ASEH 30/36 KMTB	ASEH 07/09/12 KNCA	ASEG 07/09/12 KPCE	ASEH 07/09/12 KLTA	ASEG 18/24 KLCA	AUXG 09/12/14/18/22/24 KVL A	AUXG 18/22/24/30/36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXH 12/14/18/22/24/30/36/45/54 KMTAP	ARXG 12/14/18/22/24/30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG45/54KHTB		
																			ARYG60LHTA	ARYG72/90LHTA
Input	Operation/Stop	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5										● PCB Terminal or ○ UTY-XCSX+UTZ-GXRA		● PCB Terminal	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXDA	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXNA	● PCB Terminal	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● PCB Terminal or ○ UTY-XCSX
	Forced stop	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5										● PCB Terminal					● PCB Terminal		● UTD-ECS5A	● PCB Terminal
	Forced Thermostat off	●○ UTY-XCSXZ2+ UTY-XWZXZ5										●○ UTY-XCSX+UTZ-GXRA			●○ UTY-XCSX+ UTZ-GXDA	●○ UTY-XCSX+ UTZ-GXNA	●○ UTY-XCSX+ UTZ-GXNA	● UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● UTY-XCSX
	Low noise mode operation																			
	Outdoor unit operation peak control																			
Output	Operation status	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5										● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA		● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	○ UTD-ECS5A	● UTY-XWZXZG or ○ UTY-XCSX
	Error status	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5										● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA			● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA		● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA		
	Compressor status																			
	Indoor unit fan operation status	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5										● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA		● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● UTY-XWZXZG or ○ UTY-XCSX
	Setpoint attainment status																			
	Auxiliary heater output											● UTY-XWZXZG or ○ UTY-XCSX+UTZ-GXRA		● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXDA	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXNA	● UTY-XWZXZG	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTD-ECS5A	● UTY-XWZXZG or ○ UTY-XCSX

\*1: Included in Fresh air intake kit (UTZ-VXAA or UTZ-VXRA) \*2: Functionality for installation in a server room

●: Dry Contact ○: Apply Voltage



## For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

Communication kit		External input and output PCB			External input and output PCB box			External input and output PCB bracket	
	UTY-TWRXZ3		UTY-TWRXZ2		UTY-XCSXZ1 (wire length 280 mm)		UTY-XCSXZ2 (wire length 80 mm) for Wall-mounted type		UTY-XCSX for Duct and Cassette types
					UTZ-GXDA (for Duct)	UTZ-GXRA (for Cassette)	UTZ-GXEA (for Ceiling)		
								UTZ-GXNA	

Function List for Split/Multi-Split



External input and output function/External connect kit/communication kit

Type	Refrigerant	Indoor unit		Multi-split					Outdoor unit							
		Floor	Ceiling	Wall-mounted		Mini duct	Slim duct		Compact cassette		Single Split			Simultaneous multi-split		
		 AGEG 09/12/14 KVCA	ABEG 18/22/24/30/ 36/45/54 KRTA	ASEH05 KJCAL,KJCALB ASYH05 KJCA,KJCA-B	ASEG22KMTE	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP		AUXG07KVLA	AOEG30/36/45/54KBTB, AOEG36/45/54KRTA			AOEG36/45/54KBTB, AOEG36/45/54KRTA			
				ARYG 07/09LSLAP		ARYG07/09LLTA	AUYG07/09LVLA		AOYG36/45/54/60LATT	AOYG45/54LBTA, AOYG72/90LRLA		AOYG36/45LBTB	AOYG36/45/54LATT			
Input	Operation/Stop	● UTY-XWZXZ5	● PCB Terminal or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+ UTY-XWZXZ5	● PCB Terminal	● UTD-ECS5A			● PCB Terminal							
	Forced stop	● UTY-XWZXZ5	● PCB Terminal	● UTY-XWZX or ○ UTY-XCSXZ2+UTY-XWZXZ5	● PCB Terminal	● UTD-ECS5A			● PCB Terminal							
	Forced Thermostat off	● UTY-XWZXZ5	● UTY-XCSX+ UTZ-GXEA	●○ UTY-XCSXZ2+UTY-XWZXZ5												
	Low noise mode operation									● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3		○ UTY-XWZXZ2		
	Outdoor unit operation peak control									● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3		○ UTY-XWZXZ2		
Output	Operation status	● UTY-XWZXZ5	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+UTY-XWZXZ5	● UTY-XWZXZG	● UTD-ECS5A			● UTY-XWZXZG							
	Error status	● UTY-XWZXZ5	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+UTY-XWZXZ5						● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3			○ UTY-XWZXZ2	
	Compressor status									● UTY-XWZXZ3	● UTY-XWZXZ2	● UTY-XWZXZ3			○ UTY-XWZXZ2	
	Indoor unit fan operation status	● UTY-XWZXZ5	● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA	● UTY-XWZX or ○ UTY-XCSXZ2+UTY-XWZXZ5	● UTY-XWZXZG	● UTD-ECS5A			● UTY-XWZXZG							
	Setpoint attainment status															
	Auxiliary heater output		● UTY-XWZXZG or ○ UTY-XCSX+ UTZ-GXEA			● UTY-XWZXZG										

\*1: Included in Fresh air intake kit (UTZ-VXAA or UTZ-VXRA) \*2: Functionality for installation in a server room ●: Dry Contact ○: Apply Voltage

Communication system



External connect kit					External control set				
For indoor unit			For outdoor unit		For indoor unit				
									
UTY-XWZX	UTY-XWZXZ5	UTY-XWZXZG	UTY-XWZXZ2	UTY-XWZXZ3	UTD-ECS5A				



Function List for VRF



External input and output function/External connect kit

Type	Refrigerant	Indoor unit							Indoor unit								Floor/Ceiling		
		Cassette							Duct					Floor					
		One-way flow	3D flow	Compact type	High Efficiency	Circular Flow Range			Mini Duct	Slim Duct	Low static pressure		Medium static pressure	High static pressure	EEV Internal	EEV External			
	Slim type					Large type		High Efficiency			High Efficiency	Normal					Normal		
				AUXB 004/005/007/ 009/012/014/ 018HLAH	AUXN 009/012/014 HLAH				ARXD 004/005/007/ 009/012/014/ 018/024 HLAH	ARXP 009/012/014 HLAH									
		AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH		AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH		ARXK 004/007/009/ 012/014/018/ 024GLGH	ARXD 007/009/012/ 014/018/024 GLEH, ARXD04GALH		ARXP 018/030 GLFH	ARXA 024/030/ 036/045 GLEH	ARXC 036/045/060 072/090/096 GTEH	AGYA 004/007/ 009/012/014 GCGH	AGYE 004/007/ 009/012/014 GCEH	ABYA 012/014/018/ 024GTEH	ABYA 030/036/045/ 054GTEH	
Input	Operation/Stop		● UTY-XWZXZD ○ UTY-XWZXZB															● UTY-XWZXZD ○ UTY-XWZXZB	
	All On/All Off																		
	Group stop																		
	Forced stop		● UTY-XWZXZD ○ UTY-XWZXZB															● UTY-XWZXZD ○ UTY-XWZXZB	
	Emergency stop		● UTY-XWZXZD ○ UTY-XWZXZB															● UTY-XWZXZD ○ UTY-XWZXZB	
	Forced thermostat off		● UTY-XWZXZE ○ UTY-XWZXZ7															● UTY-XWZXZE ○ UTY-XWZXZ7	
	Low noise mode operation																		
	Cooling/Heating priority																		
	Outdoor unit operation peak control																		
Power usage information from electricity meter																			
Output	Operation status		● UTY-XWZXZC															● UTY-XWZXZC	
	Error status		● UTY-XWZXZC															● UTY-XWZXZC	
	Indoor unit fan operation status		● UTY-XWZXZC															● UTY-XWZXZC	
	Auxiliary heater output								● UTY-XWZXZC										
	Base pan heater																		
Safety measure	Ventilation Fan (IN/OUT)				●UTZ-JXXA+UTY-SGZY (for R32 models)				●UTZ-JXXA+UTY-SGZY (for R32 models)										
	Alarm out				●UTZ-JXXA+UTY-SGZY (for R32 models)				●UTZ-JXXA+UTY-SGZY (for R32 models)										

\*2: The Touch panel controller has the functions of dry contact and voltage application, but the external connection kit described above is not necessary because the touch panel controller has an external input terminal block. ●: Dry Contact ○: Apply Voltage



For VRF

Expansion kit		Connection Cable	
UTZ-JXXA		UTY-XWZXZL	

Function List for VRF




External input and output function/External connect kit

Type		Refrigerant	Indoor unit				Outdoor unit						controller	Other	
			Wall-mounted				J-VS	J-IVL	J-IV	J-IVS	V-IV	VR-IV	Central remote controller	RB unit	
		EEV Internal	EEV External	—											
			ASYA 004/005/007/009/012/014 HCAH	ASYE 004/005/007/009/012/014 HCAH			AJY 040/045/054 KCTAH, AJY 040/045/054 KFTAH								
			ASYA 004/007/009012/014 GCGH	ASYE 004/007/009012/014 GCEH	ASYA18/24GBCH	ASYA030/034GTEH		AJY 072/090/108/ 126/144/162 LELDH	AJY 040/045/054 LBLDH, AJY 040/045/054 LELDH	AJY 040/045/054 LCLDH	AJY 072/090/108/ 126/144/162 LALDH	AJY 072/090/108/ 126/144 GALDH	UTY-DCGYZ3	UTP-RX01AH UTP-RX01BH UTP-RX01CH UTP-RX04BH UTP-RX08AH UTP-RX12AH	
Input	Operation/Stop	● UTY-XWZXZD ○ UTY-XWZXZB													
	All On/All Off												●UTY-XWZXZ7 ○UTY-XWZXZ8		
	Group stop						● UTY-XWZXZ6								
	Forced stop	● UTY-XWZXZD ○ UTY-XWZXZB													
	Emergency stop	● UTY-XWZXZD ○ UTY-XWZXZB						● UTY-XWZXZ6						●UTY-XWZXZ7 ○UTY-XWZXZ8	
	Forced thermostat off	● UTY-XWZXZE ○ UTY-XWZXZ7													
	Low noise mode operation						● UTY-XWZXZ6								
	Cooling/Heating priority						● UTY-XWZXZ6						●UTY-XWZXZ6 ○UTY-XWZXZB		
	Outdoor unit operation peak control						● UTY-XWZXZ6								
	Power usage information from electricity meter						● UTY-XWZXZF								
Output	Operation status	● UTY-XWZXZC						○ UTY-XWZXZ6						○UTY-XWZXZA	
	Error status	● UTY-XWZXZC						○ UTY-XWZXZ6						○UTY-XWZXZA	
	Indoor unit fan operation status	● UTY-XWZXZC													
	Auxiliary heater output														
	Base pan heater						● UTY-XWZXZ9				● UTY-XWZXZ9				
Safety measure	Ventilation Fan (IN/OUT)	●UTZ-JXXA+UTY-SGZY (for R32 models)													
	Alarm out	●UTZ-JXXA+UTY-SGZY (for R32 models)													

\*2: The Touch panel controller has the functions of dry contact and voltage application, but the external connection kit described above is not necessary because the touch panel controller has an external input terminal block. ●: Dry Contact ○: Apply Voltage

Communication system

External connect kit							
For indoor unit		For outdoor unit		For RB unit	Central remote controller	For Touch panel controller	
UTY-XWZXZ7		UTY-XWZXZD		UTY-XWZXZ6		UTY-XWZXZ9	
UTY-XWZXZB		UTY-XWZXZE		UTY-XWZXZF			
UTY-XWZXZC							

# Separation Tube



## For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

Separation tube	
UTP-SX236A / UTP-SX254A For 3-phase simultaneous multi-split  UTP-SX272A For Simultaneous multi-split Twin / Triple / Double Twin	UTP-SX354A For 3-phase simultaneous multi-split  UTP-SX372A For Simultaneous multi-split Twin / Triple / Double Twin



## for VRF

Separation tube			
UTP-AX054A  Gas pipe  Liquid pipe	UTP-AX090A  Gas pipe  Liquid pipe	UTP-AX180A  Gas pipe  Liquid pipe	UTP-AX567A  Gas pipe  Liquid pipe
UTP-BX090A  Suction Gas pipe  Discharge Gas pipe  Liquid pipe	UTP-BX180A  Suction Gas pipe  Discharge Gas pipe  Liquid pipe	UTP-BX567A  Suction Gas pipe  Discharge Gas pipe  Liquid pipe	UTP-LX180A For DX kit

Header			
UTR-H0906L / UTR-H1806L  Gas pipe  Liquid pipe	UTR-H0908L / UTR-H1808L  Gas pipe  Liquid pipe	UTP-J0906A / UTP-J1806A  Suction gas pipe  Discharge gas pipe  Liquid pipe	UTP-J0908A / UTP-J1808A  Suction gas pipe  Discharge gas pipe  Liquid pipe

Outdoor unit branch kit		Separation tube for RB unit	
UTP-CX567A  Gas Pipe  Liquid Pipe	UTP-DX567A  Suction Gas Pipe  Discharge Gas Pipe  Liquid Pipe	UTP-EX060A  Gas Pipe  Liquid Pipe	UTP-EX096A  Gas Pipe  Liquid Pipe



## for VRF

EV kit		Shut off valve kit	
Model name $\leq$ 09: UTR-EV09XB Model name $\geq$ 12: UTR-EV14XB for compact wall-mounted type	Model name $\leq$ 09: UTR-EV09XC Model name $\leq$ 12: UTR-EV14XC for R32 VRF wall-mounted type	UTP-GX027A for R32 VRF indoor unit	UTP-GX060A for R32 VRF outdoor unit
RB unit			
UTP-RX01AH / UTP-RX01BH / UTP-RX01CH Single type	UTP-RX04BH Multi-split type	UTP-RX08AH Multi-split type	UTP-RX12AH Multi-split type

## Specifications

### Separation tube

Model name	UTP-AX054A	UTP-AX090A	UTP-AX180A	UTP-AX567A
Total cooling capacity of indoor unit (kW)	19.6 or less	28.0 or less	28.1 to 56.0	56.1 or more
Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A	
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more	

### Header

Model name	3-6 Branches	UTR-H0906L	UTR-H1806L
	3-8 Branches	UTR-H0908L	UTR-H1808L
Total cooling capacity of indoor unit (kW)		28.0 or less	28.1 to 56.0
Model name	3-6 Branches	UTP-J0906A	UTP-J1806A
	3-8 Branches	UTP-J0908A	UTP-J1808A
Total cooling capacity of indoor unit (kW)		28.0 or less	28.1 to 56.0

### Outdoor unit branch kit

Model name	UTP-CX567A (for V-IV)		UTP-DX567A (for VR-IV)
Number of outdoor units	2 outdoor units	1	
	3 outdoor units	2	

### EV kit

Model name	UTR-EV09XB		UTR-EV14XB		UTR-EV09XC	UTR-EV14XC
Application model	ASYE004GCEH ASYE007GCEH ASYE009GCEH	AGYE004GCEH AGYE007GCEH AGYE009GCEH	ASYE012GCEH AGYE014GCEH	AGYE012GCEH AGYE014GCEH	ASYE004HCAH ASYE005HCAH ASYE007HCAH ASYE009HCAH	ASYE012HCAH ASYE014HCAH

### RB unit

Type			Single type			Multi-split type		
Model name			UTP-RX01AH	UTP-RX01BH	UTP-RX01CH	UTP-RX04BH	UTP-RX08AH	UTP-RX12AH
Power source	V/Ø/Hz		230/1/50					
Input power	W		17	24	31	96	136	204
Number of branches			1	1	1	4	8	12
Maximum capacity of connectable indoor units (Q)	kW		Q ≤ 8.0	Q ≤ 18.0	Q ≤ 28.0	Q ≤ 56.1*	Q ≤ 72.0	Q ≤ 95.0
Maximum capacity of connectable indoor units per branch (Q)	kW		Q ≤ 8.0	Q ≤ 18.0	Q ≤ 28.0	Q ≤ 18.0	Q ≤ 8.0	Q ≤ 8.0
Maximum Connectable Indoor Units per Branch			3	8	8	8	7	7
Dimensions (H × W × D)	mm		198 × 298 × 268			260 × 658 × 428	298 × 660 × 618	298 × 990 × 618

\*1: When two RB units are connected in series (8 branches in total), the maximum capacity of the connectable indoor units is up to 56.0 kW.

### Shut off valve kit

Model name	UTP-GX027A		UTP-GX060A
Power source	V/Ø/Hz	230/1/50	230/1/50
Input power	W	24	24
Number of branches		1	1
Maximum number of connectable Expansion kit	kW	4	4
Maximum capacity of connectable indoor units (Q)	kW	$Q \leq 8.0$	$Q \leq 18.0$
Maximum capacity of Connectable Indoor Units per Branch (Q)	kW	$Q \leq 8.0$	$Q \leq 18.0$
Dimensions (H × W × D)	mm	250 × 540 × 267	250 × 540 × 267